

Brio


D123-1

Brio Series



○ 白色/White

線圖/Dimensions

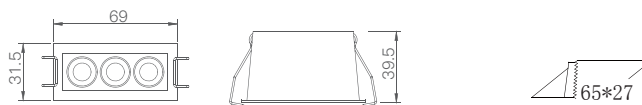


調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:220-240V 50Hz
 功率:5W
 光通量:220lm
 材質:鋁
 光束角:24°/36°
 顯示指數:≥90
 色溫:2700K/3000K/4000K
 Input Voltage:220-240V 50Hz
 Power:5W
 Luminous Flux:220lm
 Material:Aluminum
 BA.:24°/36°
 CRI:≥90
 CCT:2700K/3000K/4000K

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	549	0.4
2	137	1.5
3	61	3.4
4	34	6.1
5	21	9.5




D123-2

Brio Series



線圖/Dimensions

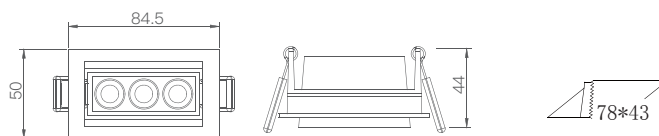

調光控制系統/Dimming Control



定電流
non-dim



可控硅
Triac



0-10V




DALI

規格/Technical Specifications

輸入電壓:220-240V 50Hz
 功率:5W
 光通量:230lm
 材質:鋁
 光束角:24°/36°
 顯示指數:≥90
 色溫:2700K/3000K/4000K
 Input Voltage:220-240V 50Hz
 Power:5W
 Luminous Flux:230lm
 Material:Aluminum
 BA.:24°/36°
 CRI:≥90
 CCT:2700K/3000K/4000K

○ 白色/White

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	581	0.4
2	145	1.5
3	64	3.4
4	36	6.1
5	23	9.5




D123-3

Brio Series



○ 白色/White

線圖/Dimensions

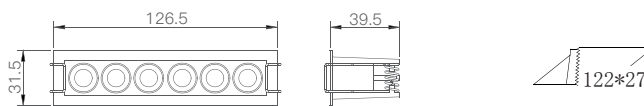

調光控制系統/Dimming Control



定電流
non-dim



可控硅
Triac



0-10V




DALI

規格/Technical Specifications

輸入電壓:220-240V 50Hz
 功率:10W
 光通量:760lm
 材質:鋁
 光束角:24°/36°
 顯示指數:≥90
 色溫:2700K/3000K/4000K
 Input Voltage:220-240V 50Hz
 Power:10W
 Luminous Flux:760lm
 Material:Aluminum
 BA.:24°/36°
 CRI:≥90
 CCT:2700K/3000K/4000K

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	2597	0.2
2	649	0.8
3	288	1.7
4	162	3.0
5	103	4.8




D123-4

Brio Series



○ 白色/White

線圖/Dimensions

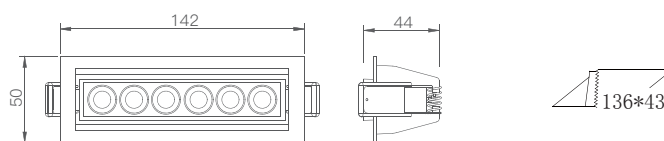


調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:220-240V 50Hz
 功率:10W
 光通量:810lm
 材質:鋁
 光束角:24°/36°
 顯示指數:≥90
 色溫:2700K/3000K/4000K
 Input Voltage:220-240V 50Hz
 Power:10W
 Luminous Flux:810lm
 Material:Aluminum
 BA.:24°/36°
 CRI:≥90
 CCT:2700K/3000K/4000K

配光曲線圖/Light pattern




H(m)	En(lx)	S(sq.m)
1	2621	0.2
2	655	0.9
3	291	1.9
4	163	3.5
5	104	5.4




D123-5

Brio Series

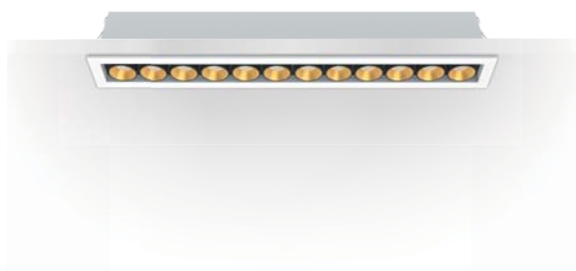

○ 白色/White

線圖/Dimensions




調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:220-240V 50Hz
 功率:15W
 光通量:1160lm
 材質:鋁
 光束角:24°/36°
 顯示指數:≥90
 色溫:2700K/3000K/4000K
 Input Voltage:220-240V 50Hz
 Power:15W
 Luminous Flux:1160lm
 Material:Aluminum
 BA.:24°/36°
 CRI:≥90
 CCT:2700K/3000K/4000K

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	3773	0.2
2	943	0.9
3	419	2.0
4	235	3.5
5	150	5.4




D123-6

Brio Series



○ 白色/White

線圖/Dimensions

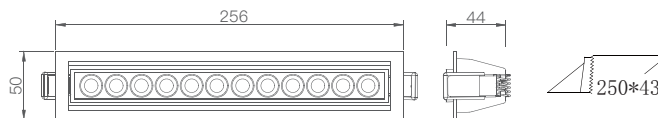

調光控制系統/Dimming Control



定電流
non-dim



可控硅
Triac



0-10V




DALI

規格/Technical Specifications

輸入電壓:220-240V 50Hz
 功率:15W
 光通量:1100lm
 材質:鋁
 光束角:24°/36°
 顯示指數:≥90
 色溫:2700K/3000K/4000K
 Input Voltage:220-240V 50Hz
 Power:15W
 Luminous Flux:1100lm
 Material:Aluminum
 BA.:24°/36°
 CRI:≥90
 CCT:2700K/3000K/4000K

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	3767	0.2
2	941	0.8
3	418	1.8
4	235	3.2
5	150	5.0

