

Luka Series

靈活且多樣化的酒店照明系列。

A comprehensive collection of hospitality lighting.







簡易的組裝-轉加扣：

簡易不需工具的組合方式，讓使用者可依據不同環境需求，搭配不同模組自行進行組合，更加彈性更靈活。

Easy assembly – Twist and Lock

It's an easy assembly method, enabling customers to easily choose the front trim according to their needs. Ease for stock.

圓形嵌燈 Round



D35-3

ø75mm



D40-1

ø70mm



D40-2

ø70mm



D40-2-A

ø70mm



D40-3

ø70mm



D40-6

ø75mm



D40-10

ø85mm

方形嵌燈 Square



D40-4

78x78mm



D40-4-A

78x78mm



D40-5

78x78mm



D40-7

75x75mm


D11-1-B

Luka Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

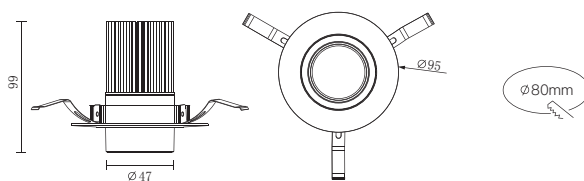


調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:220-240V 50Hz
 功率:10W
 光通量:670lm
 材質:鋁
 光束角:20°/30°
 顯示指數:≥90
 色溫:2700K/3000K/4000K/雙色溫
 Input Voltage:220-240V 50Hz
 Power:10W
 Luminous Flux:670lm
 Material:Aluminum
 BA.:20°/30°
 CRI:≥90
 CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern

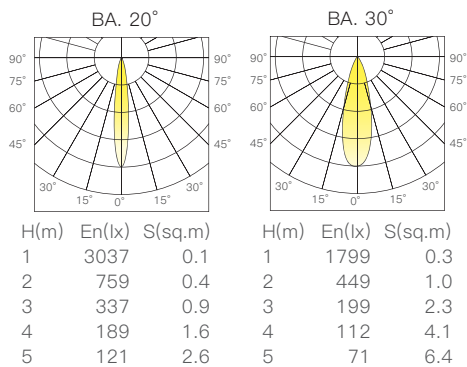

光學配件/Optical Accessories




D35-3

Luka Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

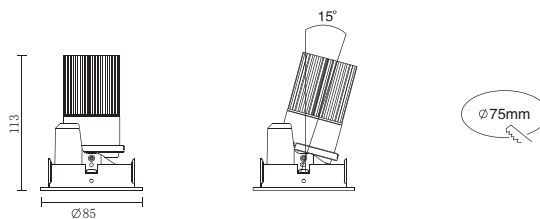


調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:220-240V 50Hz
 功率:10W
 光通量:640lm
 材質:鋁
 光束角:15°/24°/36°
 顯示指數:≥90
 色溫:2700K/3000K/4000K/雙色溫
 Input Voltage:220-240V 50Hz
 Power:10W
 Luminous Flux:640lmh
 Material:Aluminum
 BA.:15°/24°/36°
 CRI:≥90
 CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern

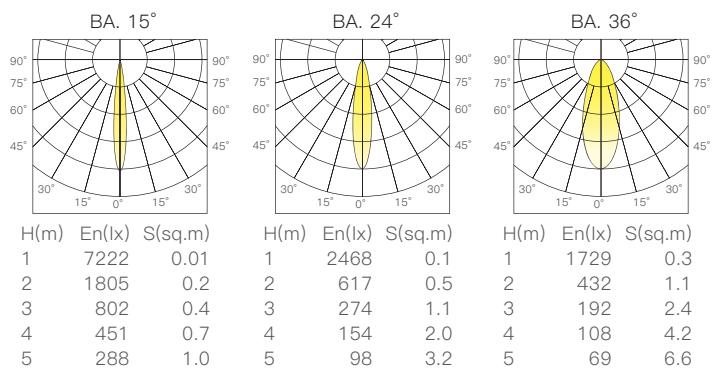

光學配件/Optical Accessories



B9模組 B9 Module
 B9-1模組 B9-1Module
 B9-2模組 B9-2Module
 B15模組 B15Module




D40-1

Luka Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

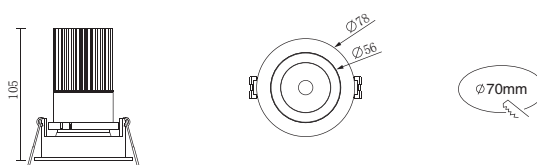


調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:220-240V 50Hz
 功率:10W
 光通量:660lm
 材質:鋁
 光束角:10°/24°/30°
 顯示指數:≥90
 色溫:2700K/3000K/4000K/雙色溫
 Input Voltage:220-240V 50Hz
 Power:10W
 Luminous Flux:660lm
 Material:Aluminum
 BA.:10°/24°/30°
 CRI:≥90
 CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern

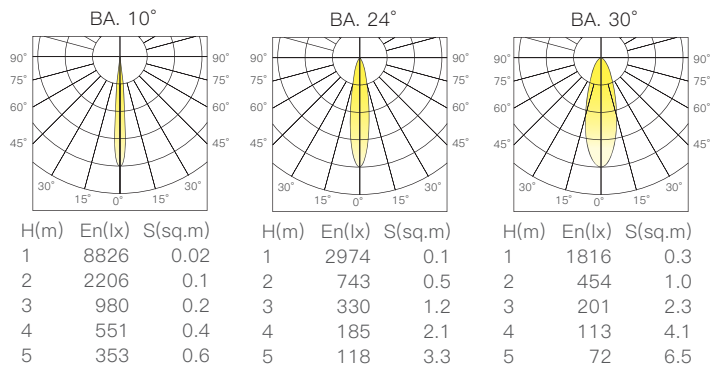

光學配件/Optical Accessories



B9模組 B9Module B9-1模組 B9-1Module B9-2模組 B9-2Module B15模組 B15Module




D40-2

Luka Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

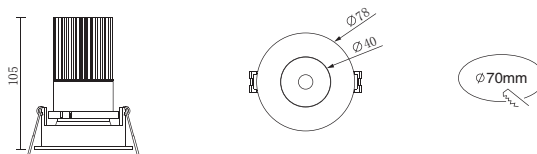


調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:220-240V 50Hz
 功率:10W
 光通量:660lm
 材質:鋁
 光束角:10°/24°/30°
 顯示指數:≥90
 色溫:2700K/3000K/4000K/雙色溫
 Input Voltage:220-240V 50Hz
 Power:10W
 Luminous Flux:660lm
 Material:Aluminum
 BA.:10°/24°/30°
 CRI:≥90
 CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern

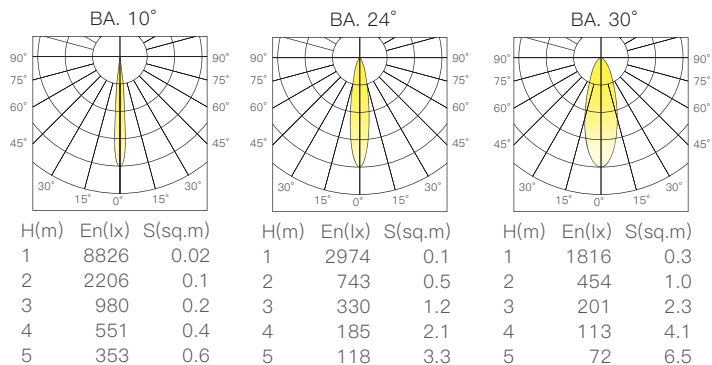

光學配件/Optical Accessories




D40-2-A

Luka Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

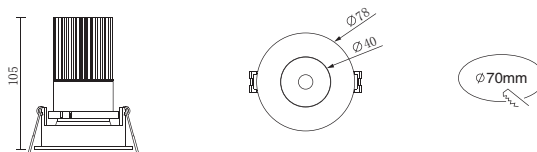


調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:220-240V 50Hz
 功率:10W
 光通量:660lm
 材質:鋁
 光束角:10°/24°/30°
 顯示指數:≥90
 色溫:2700K/3000K/4000K/雙色溫
 Input Voltage:220-240V 50Hz
 Power:10W
 Luminous Flux:660lm
 Material:Aluminum
 BA.:10°/24°/30°
 CRI:≥90
 CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern

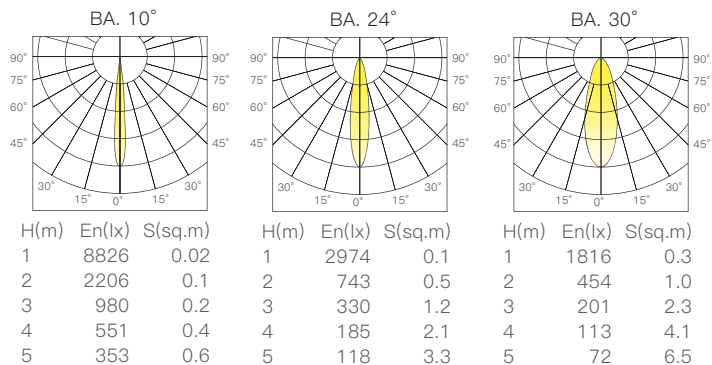

光學配件/Optical Accessories




D40-3

Luka Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

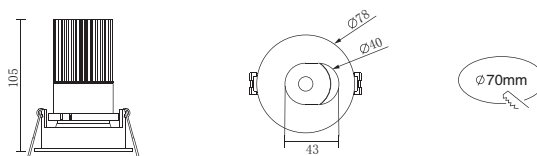


調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:220-240V 50Hz
 功率:10W
 光通量:480lm
 材質:鋁
 光束角:15°/30°
 顯示指數:≥90
 色溫:2700K/3000K/4000K/雙色溫
 Input Voltage:220-240V 50Hz
 Power:10W
 Luminous Flux:480lm
 Material:Aluminum
 BA.:15°/30°
 CRI:≥90
 CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern

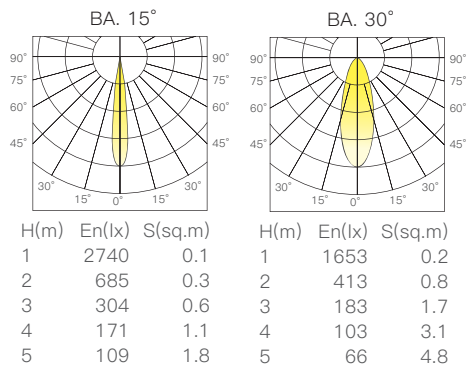

光學配件/Optical Accessories




D40-4

Luka Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

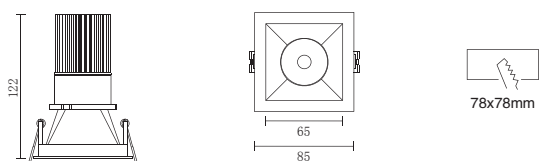


調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:220-240V 50Hz
 功率:10W
 光通量:630lm
 材質:鋁
 光束角:15°/24°/36°
 顯示指數:≥90
 色溫:2700K/3000K/4000K/雙色溫
 Input Voltage:220-240V 50Hz
 Power:10W
 Luminous Flux:630lm
 Material:Aluminum
 BA.:15°/24°/36°
 CRI:≥90
 CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern

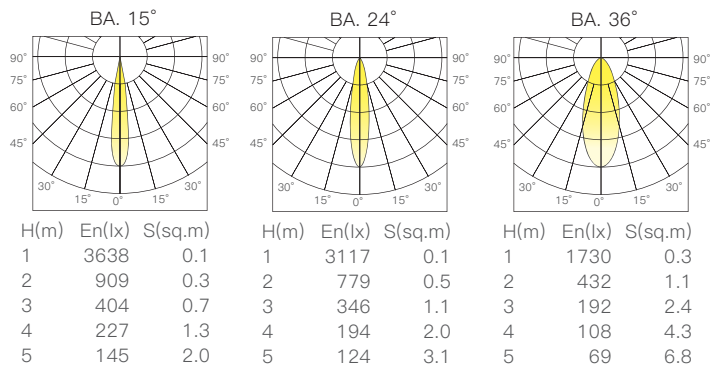

光學配件/Optical Accessories




D40-4-A

Luka Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

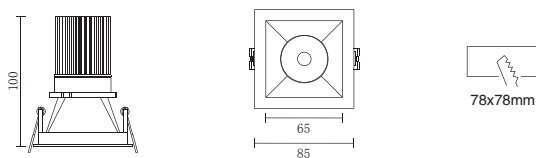


調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:220-240V 50Hz
 功率:10W
 光通量:630lm
 材質:鋁
 光束角:15°/24°/36°
 顯示指數:≥90
 色溫:2700K/3000K/4000K/雙色溫
 Input Voltage:220-240V 50Hz
 Power:10W
 Luminous Flux:630lm
 Material:Aluminum
 BA.:15°/24°/36°
 CRI:≥90
 CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern

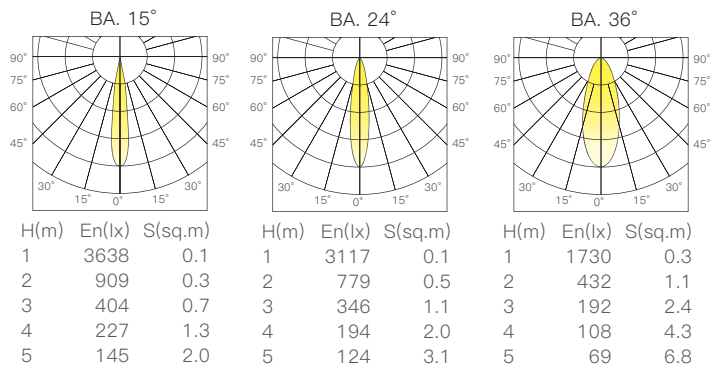

光學配件/Optical Accessories



B9模組 B9Module
 B9-1模組 B9-1Module
 B9-2模組 B9-2Module
 B15模組 B15Module




D40-5

Luka Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

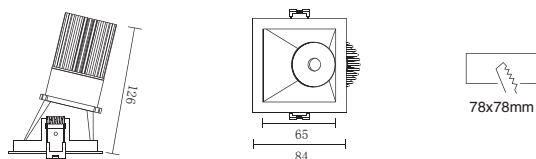


調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:220-240V 50Hz
 功率:10W
 光通量:570lm
 材質:鋁
 光束角:15°/24°/36°
 顯示指數:≥90
 色溫:2700K/3000K/4000K/雙色溫
 Input Voltage:220-240V 50Hz
 Power:10W
 Luminous Flux:570lm
 Material:Aluminum
 BA.:15°/24°/36°
 CRI:≥90
 CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern

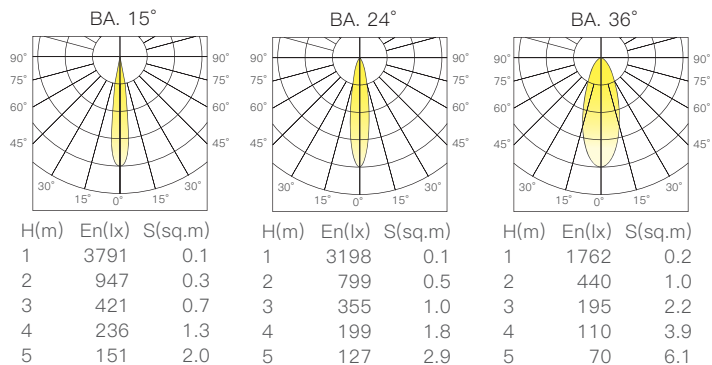

光學配件/Optical Accessories




D40-6

Luka Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

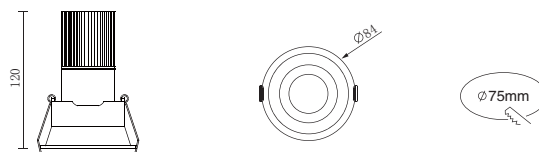


調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:220-240V 50Hz
 功率:10W
 光通量:630lm
 材質:鋁
 光束角:15°/24°/36°
 顯示指數:≥90
 色溫:2700K/3000K/4000K/雙色溫
 Input Voltage:220-240V 50Hz
 Power:10W
 Luminous Flux:630lm
 Material:Aluminum
 BA.:15°/24°/36°
 CRI:≥90
 CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern

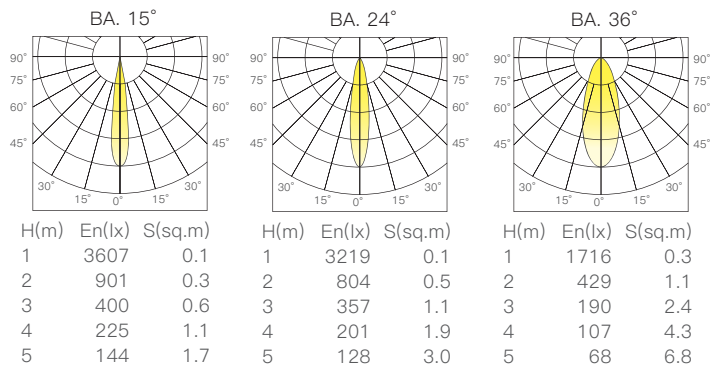

光學配件/Optical Accessories




D40-7

Luka Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

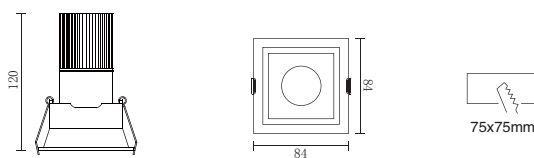


調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:220-240V 50Hz
 功率:10W
 光通量:650lm
 材質:鋁
 光束角:15°/24°/36°
 顯示指數:≥90
 色溫:2700K/3000K/4000K/雙色溫
 Input Voltage:220-240V 50Hz
 Power:10W
 Luminous Flux:650lm
 Material:Aluminum
 BA.:15°/24°/36°
 CRI:≥90
 CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern

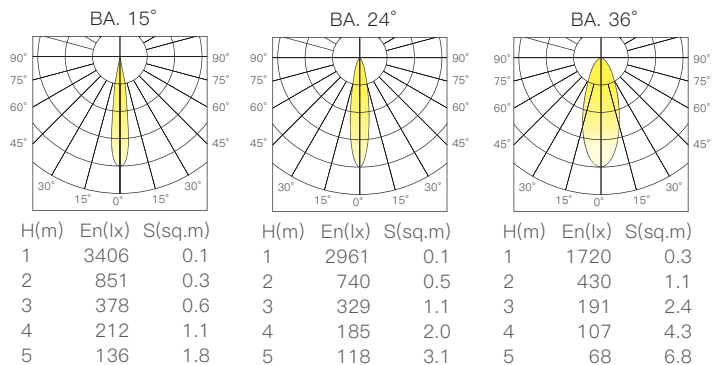

光學配件/Optical Accessories



B9模組 B9Module B9-1模組 B9-1Module B9-2模組 B9-2Module B15模組 B15Module




D40-10

Luka Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

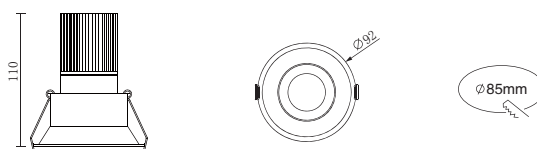


調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:220-240V 50Hz
 功率:10W
 光通量:630lm
 材質:鋁
 光束角:15°/24°/36°
 顯示指數:≥90
 色溫:2700K/3000K/4000K/雙色溫
 Input Voltage:220-240V 50Hz
 Power:10W
 Luminous Flux:630lm
 Material:Aluminum
 BA.:15°/24°/36°
 CRI:≥90
 CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern

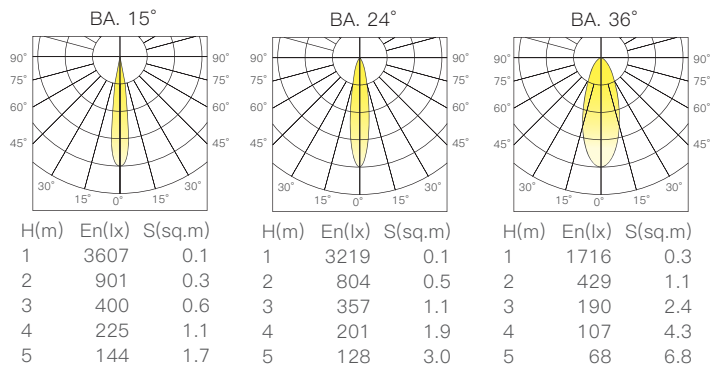

光學配件/Optical Accessories



B9模組 B9Module B9-1模組 B9-1Module B9-2模組 B9-2Module B15模組 B15Module

