


S48-L Linear Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

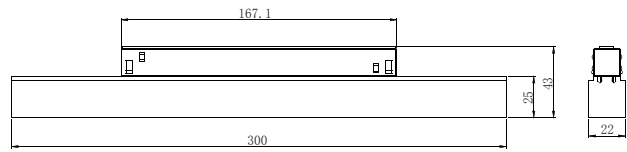


調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:DC48V
 功率:10W
 光通量:500lm
 材質:鋁
 光束角:泛光
 顯示指數:≥90
 色溫:2700K/3000K/4000K/雙色溫
 Input Voltage:DC48V
 Power:10W
 Luminous Flux:500lm
 Material:Aluminum
 BA.:Flood
 CRI:≥90
 CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	220	3.6
2	55	14.6
3	24	32.8
4	13	58.3
5	8	91.0


S48-1-L

Linear Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

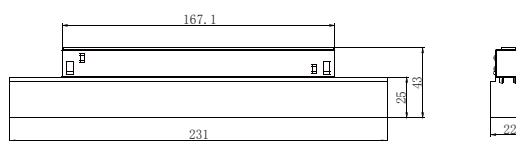


調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:DC48V
 功率:10W
 光通量:460lm
 材質:鋁
 光束角:30°
 顯示指數:≥90
 色溫:2700K/3000K/4000K
 Input Voltage:DC48V
 Power:10W
 Luminous Flux:460lm
 Material:Aluminum
 BA.:30°
 CRI:≥90
 CCT:2700K/3000K/4000K

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	1239	0.2
2	309	0.9
3	137	1.9
4	77	3.4
5	49	5.4




S48-2-L

Linear Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions




調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:DC48V
 功率:20W
 光通量:800lm
 材質:鋁
 光束角:泛光
 顯示指數: ≥ 90
 色溫:2700K/3000K/4000K/雙色溫
 Input Voltage:DC48V
 Power:20W
 Luminous Flux:800lm
 Material:Aluminum
 BA.:Flood
 CRI: ≥ 90
 CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	336	4.4
2	84	17.5
3	37	39.3
4	21	69.9
5	13	109.3


S48-3-L

Linear Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions




調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:DC48V
 功率:20W
 光通量:700lm
 材質:鋁
 光束角:30°
 顯示指數:≥90
 色溫:2700K/3000K/4000K
 Input Voltage:DC48V
 Power:20W
 Luminous Flux:700lm
 Material:Aluminum
 BA.:30°
 CRI:≥90
 CCT:2700K/3000K/4000K

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	1958	0.2
2	489	0.9
3	217	2.1
4	122	3.7
5	78	5.8




S48-4-L

Linear Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

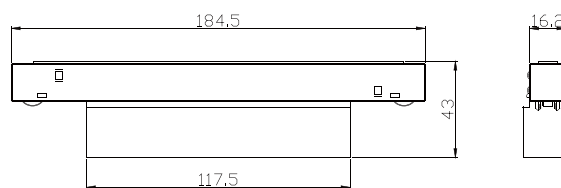


調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:DC48V
 功率:6W
 光通量:330lm
 材質:鋁
 光束角:40°
 顯示指數:≥90
 色溫:2700K/3000K/4000K
 Input Voltage:DC48V
 Power:6W
 Luminous Flux:330lm
 Material:Aluminum
 BA.:40°
 CRI:≥90
 CCT:2700K/3000K/4000K

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	699	0.4
2	174	1.6
3	77	3.6
4	43	6.4
5	28	10.1




S57-1-L

Linear Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

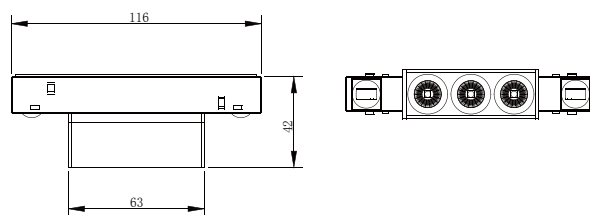


調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:DC48V
 功率:3W
 光通量:240lm
 材質:鋁
 光束角:26°
 顯示指數:≥90
 色溫:2700K/3000K/4000K
 Input Voltage:DC48V
 Power:3W
 Luminous Flux:240lm
 Material:Aluminum
 BA.:26°
 CRI:≥90
 CCT:2700K/3000K/4000K

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	788	0.2
2	197	0.7
3	87	1.5
4	49	2.6
5	31	4.1




S57-2-L

Linear Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

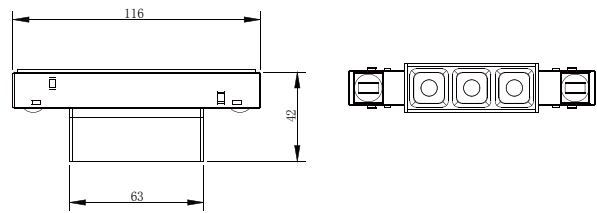


調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:DC48V
 功率:3W
 光通量:220lm
 材質:鋁
 光束角:45°
 顯示指數:≥90
 色溫:2700K/3000K/4000K
 Input Voltage:DC48V
 Power:3W
 Luminous Flux:220lm
 Material:Aluminum
 BA.:45°
 CRI:≥90
 CCT:2700K/3000K/4000K

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	418	0.5
2	104	2.1
3	46	4.8
4	26	8.6
5	16	13.4


S57-3-L

Linear Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

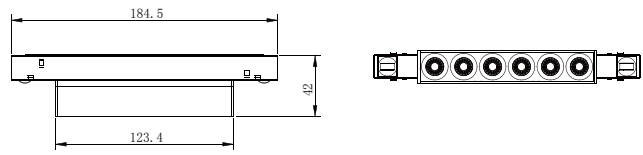


調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:DC48V
 功率:6W
 光通量:420lm
 材質:鋁
 光束角:26°
 顯示指數:≥90
 色溫:2700K/3000K/4000K
 Input Voltage:DC48V
 Power:6W
 Luminous Flux:420lm
 Material:Aluminum
 BA.:26°
 CRI:≥90
 CCT:2700K/3000K/4000K

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	1274	0.2
2	318	0.8
3	141	1.8
4	79	3.2
5	51	5.0


S57-4-L

Linear Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

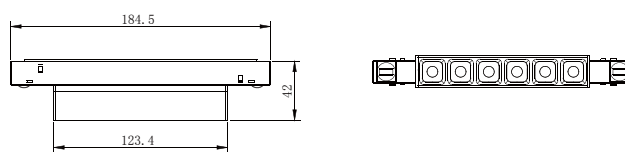


調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:DC48V
 功率:6W
 光通量:430lm
 材質:鋁
 光束角:45°
 顯示指數:≥90
 色溫:2700K/3000K/4000K
 Input Voltage:DC48V
 Power:6W
 Luminous Flux:430lm
 Material:Aluminum
 BA.:45°
 CRI:≥90
 CCT:2700K/3000K/4000K

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	837	0.5
2	209	2.1
3	93	4.7
4	52	8.4
5	33	13.1

