


OD5 Beam Series



● 灰色/Grey

線圖/Dimensions

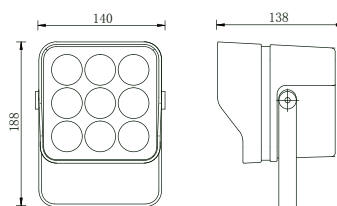

調光控制系統/Dimming Control



定電流
non-dim



可控硅
Triac



0-10V




DALI

規格/Technical Specifications

輸入電壓:220-240V 50Hz
 功率:20W
 光通量:1300lm
 材質:鋁
 光束角:5°
 顯示指數:≥80
 色溫:2700K/3000K/4000K
 Input Voltage:220-240V 50Hz
 Power:20W
 Luminous Flux:1300lm
 Material:Flood
 BA.:5°
 CRI:≥80
 CCT:2700K/3000K/4000K

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	76007	0.01
2	19001	0.03
3	8445	0.07
4	4750	0.11
5	3040	0.18




OD5-1 Beam Series



● 灰色/Grey

線圖/Dimensions

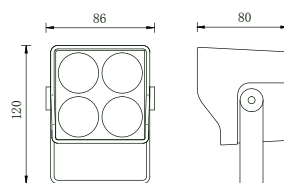

調光控制系統/Dimming Control



定電流
non-dim



可控硅
Triac



0-10V




DALI

規格/Technical Specifications

輸入電壓:220-240V 50Hz
 功率:8W
 光通量:700lm
 材質:鋁
 光束角:5°
 顯示指數:≥80
 色溫:2700K/3000K/4000K
 Input Voltage:220-240V 50Hz
 Power:8W
 Luminous Flux:700lm
 Material:Aluminum
 BA.:5°
 CRI:≥80
 CCT:2700K/3000K/4000K

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	51534	0.004
2	12883	0.015
3	5726	0.03
4	3220	0.06
5	2061	0.09


OD12

Beam Series



● 銀色/Silver

線圖/Dimensions

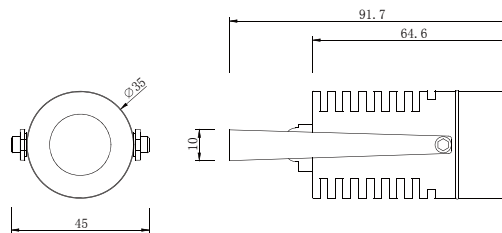

調光控制系統/Dimming Control



定電流
non-dim



可控矽
Triac



0-10V



DALI

規格/Technical Specifications

輸入電壓:DC24V

LED功率:3W

光通量:150lm

材質:不鏽鋼

光束角:15°

顯示指數:≥90

色溫:3000K/4000K/5700K

Input Voltage:DC24V

LED Power:3W

Luminous Flux:150lm


Material:Stainless steel

BA.:15°

CRI:≥90

CCT:3000K/4000K/5700K

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	1380	0.1
2	345	0.2
3	153	0.5
4	86	0.9
5	55	1.4

