


P1 Cylinder Series



- 黑色/Black
- 白色/White

線圖/Dimensions



調光控制系統/Dimming Control



定電流
non-dim



可控矽
Triac



0-10V




DALI

規格/Technical Specifications

輸入電壓:220-240V 50Hz
 功率:3W
 光通量:120lm
 材質:鋁
 光束角:泛光
 顯示指數:≥90
 色溫:2700K/3000K/4000K
 Input Voltage:220-240V 50Hz
 Power:3W
 Luminous Flux:120lm
 Material:Aluminum
 BA.:Flood
 CRI:≥90
 CCT:2700K/3000K/4000K

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	48	3.6
2	12	14.4
3	5	32.3
4	3	57.4
5	2	89.7




P1-1

Cylinder Series



- 黑色/Black
- 白色/White

線圖/Dimensions



調光控制系統/Dimming Control



定電流
non-dim



可控矽
Triac



0-10V




DALI

規格/Technical Specifications

輸入電壓:220-240V 50Hz
 功率:3W
 光通量:85lm
 材質:鋁
 光束角:泛光
 顯示指數:≥90
 色溫:2700K/3000K/4000K
 Input Voltage:220-240V 50Hz
 Power:3W
 Luminous Flux:85lm
 Material:Aluminum
 BA.:Flood
 CRI:≥90
 CCT:2700K/3000K/4000K

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	34	5.4
2	8	21.6
3	3	48.7
4	2	86.5
5	1	135.2




P1-2 Cylinder Series



- 黑色/Black
- 白色/White

線圖/Dimensions



調光控制系統/Dimming Control



定電流
non-dim



可控硅
Triac



0-10V




DALI

規格/Technical Specifications

輸入電壓:220-240V 50Hz
 功率:3W
 光通量:120lm
 材質:鋁
 光束角:泛光
 顯示指數:≥90
 色溫:2700K/3000K/4000K
 Input Voltage:220-240V 50Hz
 Power:3W
 Luminous Flux:120lm
 Material:Aluminum
 BA.:Flood
 CRI:≥90
 CCT:2700K/3000K/4000K

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	34.5	9.3
2	8.6	37.2
3	3.8	83.8
4	2.1	148.9
5	1.3	232.6




P21

Cylinder Series



- 黑色/Black
- 白色/White

線圖/Dimensions



調光控制系統/Dimming Control



定電流
non-dim



可控硅
Triac



0-10V



DALI

規格/Technical Specifications

輸入電壓:220-240V 50Hz

功率:10W

光通量:420lm

材質:鋁

光束角:10°

濾片角度:15°/25°/38°/10x35°/蜂網片

顯示指數:≥90

色溫:2700K/3000K/4000K

Input Voltage:220-240V 50Hz

Power:10W

Luminous Flux:420lm

Material:Aluminum


BA.:10°

Filter Angle.:15°/25°/38°/10x35°/Honey Comb

CRI:≥90

CCT:2700K/3000K/4000K

配光曲線圖/Light pattern

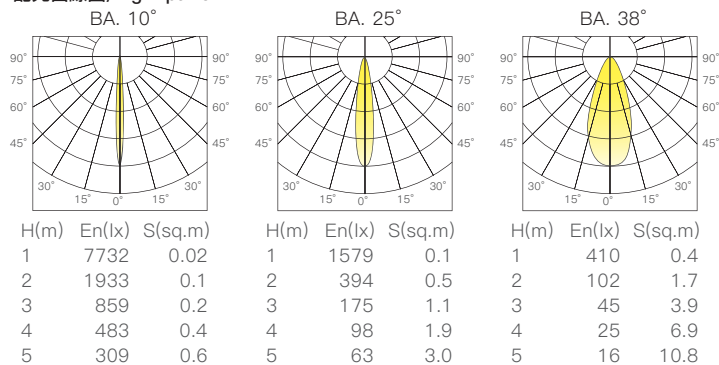

光學配件/Front Ring Color



黑色
Black

鉻色
Chrome

金色
Gold

黑鉻
Black
Chrome

玫瑰金
Rose
Golden




P21-1

Cylinder Series



- 黑色/Black
- 白色/White

線圖/Dimensions




調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:220-240V 50Hz
 功率:10W
 光通量:420lm
 材質:鋁
 光束角:10°
 濾片角度:15°/25°/38°/10x35°/蜂網片
 顯示指數:≥90
 色溫:2700K/3000K/4000K
 Input Voltage:220-240V 50Hz
 Power:10W
 Luminous Flux:420lm
 Material:Aluminum
 BA.:10°
 Filter Angle.:15°/25°/38°/10x35°/Honey Comb
 CRI:≥90
 CCT:2700K/3000K/4000K

配光曲線圖/Light pattern

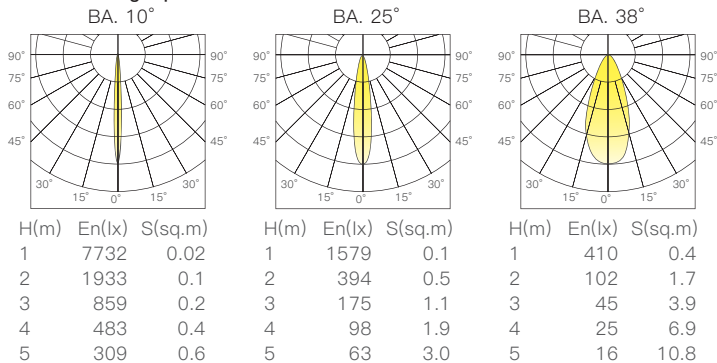

光學配件/Front Ring Color




P29-1

Cylinder Series



- 黑色/Black
- 白色/White

線圖/Dimensions



調光控制系統/Dimming Control



定電流
non-dim



可控矽
Triac



0-10V




DALI

規格/Technical Specifications

輸入電壓:220-240V 50Hz
 功率:10W
 光通量:700lm
 材質:鋁
 光束角:17°-45°
 顯示指數:≥90
 色溫:2700K/3000K/4000K/雙色溫
 Input Voltage:220-240V 50Hz
 Power:10W
 Luminous Flux:700lm
 Material:Aluminum
 BA.:17°-45°
 CRI:≥90
 CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern

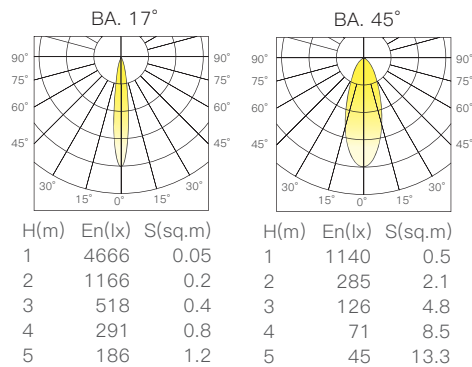


P29-2

Cylinder Series



- 黑色/Black
- 白色/White

線圖/Dimensions



調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:220-240V 50Hz
 功率:15W
 光通量:890lm
 材質:鋁
 光束角:17°-45°
 顯示指數:≥90
 色溫:2700K/3000K/4000K/雙色溫
 Input Voltage:220-240V 50Hz
 Power:15W
 Luminous Flux:890lm
 Material:Aluminum
 BA.:17°-45°
 CRI:≥90
 CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern

