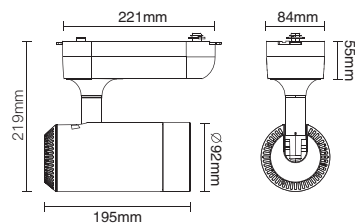


S21-1**Robo Trac Series**

- 黑色/Black
- 白色/White

線圖/Dimensions**調光控制系統/Dimming Control****規格/Technical Specifications**

輸入電壓:120-277V 50Hz/60Hz

功率:28W

光通量:1200lm (2700K)

材質:鋁+PC

光束角:12°-55°

顯示指數:≥90

色溫:2700K/3000K/4000K/雙色溫

Input Voltage:120-277V 50Hz/60Hz

Power:28W

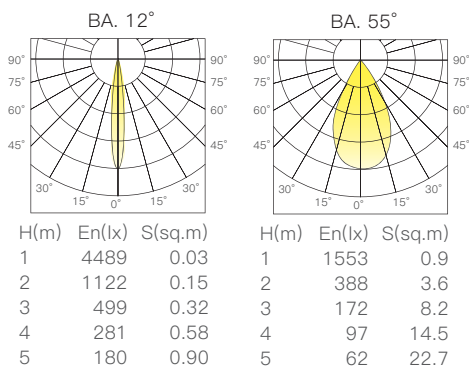
Luminous Flux:1200lm (2700K)

Material:Aluminum+PC

BA.:12°-55°

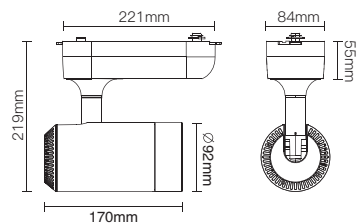
CRI:≥90

CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern

S21-2**Robo Trac Series**

- 黑色/Black
- 白色/White

線圖/Dimensions**調光控制系統/Dimming Control****規格/Technical Specifications**

輸入電壓:120-277V 50Hz/60Hz

功率:28W

光通量:2200lm

材質:鋁+PC

光束角:7°

顯示指數:≥90

色溫:2700K/3000K/4000K

Input Voltage:120-277V 50Hz/60Hz

Power:28W


Luminous Flux:2200lm

Material:Aluminum+PC

BA.:7°

CRI:≥90

CCT:2700K/3000K/4000K

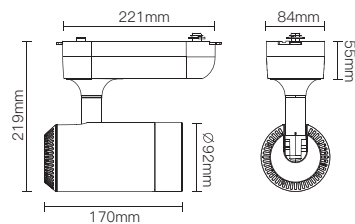
配光曲線圖/Light pattern

H(m)	En(lx)	S(sq.m)
1	59587	0.01
2	14896	0.05
3	6620	0.11
4	3724	0.20
5	2383	0.32



S21-2-A**Robo Trac Series**

- 黑色/Black
- 白色/White

線圖/Dimensions**調光控制系統/Dimming Control****規格/Technical Specifications**

輸入電壓:120-277V 50Hz/60Hz

功率:28W

光通量:2200lm

材質:鋁+PC

光束角:20°/25°/45°

顯示指數:≥90

色溫:2700K/3000K/4000K/雙色溫

Input Voltage:120-277V 50Hz/60Hz

Power:28W

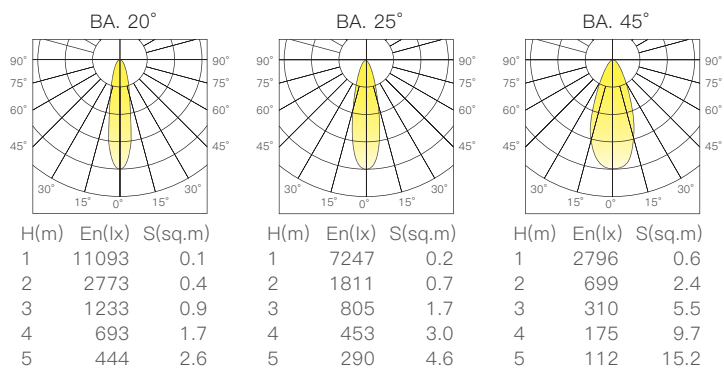
Luminous Flux:2200lm

Material:Aluminum+PC

BA.:20°/25°/45°

CRI:≥90

CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern

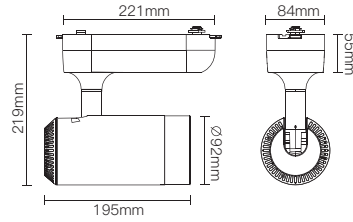
S21-3

Robo Trac Series



- 黑色/Black
- 白色/White

線圖/Dimensions



調光控制系統/Dimming Control



2.4GHz Wireless Connection
2.4GHz

規格/Technical Specifications

輸入電壓:120-277V 50Hz/60Hz

功率:28W

光通量: 1200lm (2700K)

材質:鋁+PC

光束角:12°-55°

顯示指數:≥90

色溫:2700K/3000K/4000K/雙色溫

Input Voltage:120-277V 50Hz/60Hz

Power:28W

Luminous Flux:1200lm (2700K)

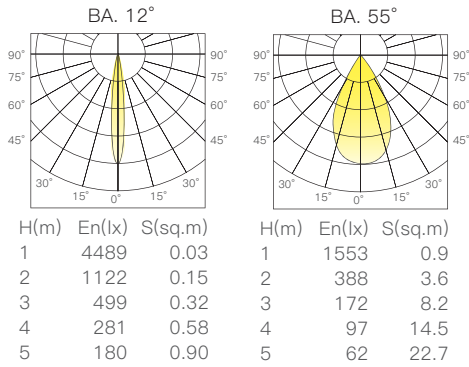
Material:Aluminum+PC

BA.:12°-55°

CRI:≥90

CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern



配件/ Accessories

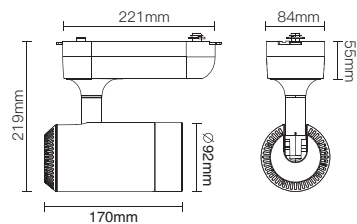


遙控器
Remote Control



S21-3-A**Robo Trac Series**

- 黑色/Black
- 白色/White

線圖/Dimensions**調光控制系統/Dimming Control**

2.4GHz Wireless Connection
2.4GHz

規格/Technical Specifications

輸入電壓:120-277V 50Hz/60Hz

功率:28W

光通量:2200lm

材質:鋁+PC

光束角:7°

顯示指數:≥90

色溫:2700K/3000K/4000K

Input Voltage:120-277V 50Hz/60Hz

Power:28W


Luminous Flux:2200lm

Material:Aluminum+PC

BA.:7°

CRI:≥90

CCT:2700K/3000K/4000K

配光曲線圖/Light pattern

H(m)	En(lx)	S(sq.m)
1	59587	0.01
2	14896	0.05
3	6620	0.11
4	3724	0.20
5	2383	0.32

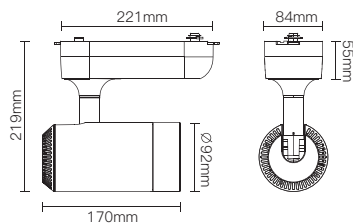
配件/ Accessories

遙控器
Remote Control



S21-3-B**Robo Trac Series**

- 黑色/Black
- 白色/White

線圖/Dimensions**調光控制系統/Dimming Control**

2.4GHz Wireless Connection

2.4GHz

規格/Technical Specifications

輸入電壓:120-277V 50Hz/60Hz

功率:28W

光通量:2200lm

材質:鋁+PC

光束角:20°/25°/45°

顯示指數:≥90

色溫:2700K/3000K/4000K/雙色溫

Input Voltage:120-277V 50Hz/60Hz

Power:28W

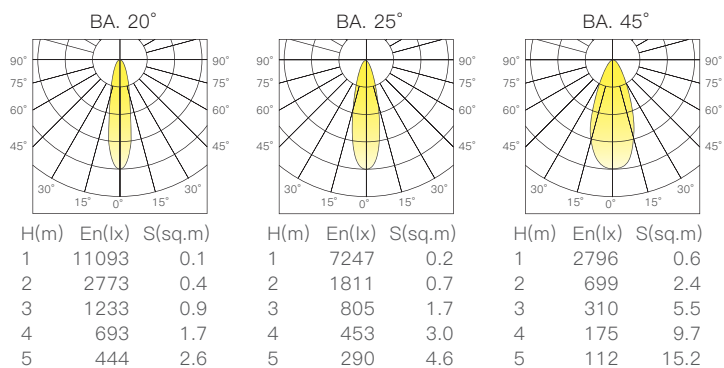
Luminous Flux:2200lm

Material:Aluminum+PC

BA.:20°/25°/45°

CRI:≥90

CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern**配件/ Accessories**

遙控器

Remote Control

