

***ACOfusion***



[www.acofusion.com](http://www.acofusion.com)



# Lighting

For The Future

## About Acofusion 兆合智能照明

Acofusion's international portfolio is via versatility includes the interior and exterior products in hospitality, retail, commercial and residential applications. Committed to our vision of providing professional and reliable technical support to our clients. With our 30 years in lighting and product design. Acofusion retains its competitive edge via its owned manufacturing factory, where a strict management system is implemented to ensure consistency with the highest quality. Acofusion's services include ODM design, OEM manufacture, in-house graphic design and multilingual sales team to assist worldwide clients and projects.

兆合智能照明的照明應用案例遍及海內外的室內戶外應用，同時觸及酒店照明、商用照明、高端住宅照明及智能控制。兆合團隊擁有30年的照明產品設計能力，同時100%擁有自己的工廠並嚴格的要求工廠管理及生產流程符合國際規範，確保可提供市場及客人最高品質的產品及服務。兆合智能照明提供產品設計開發、代工製造及視覺設計等服務，同時擁有多語系的業務團隊來服務全球客戶及國際專案。

We are focused on the details- mechanical design, heat dissipation, optimal the optical and all the relevant LED parameters. With a visual simplicity, our products are the result of optimize and testing. In recent years, we are devoted to developing advanced technology of wireless lighting control. By using up-to-date innovative technology and combine with fixture design, enabling users alike to optimally exploit the unimagined possibilities in lighting. Our team is continuously enhance energy-efficiency and optimal quality of light. Through rigorous testing, experienced product development skills and optimization material used.

兆合專注於細節-機械設計、散熱、優化光學和所有相關的LED參數，兆合的團隊不斷追求更高的效率和優化光品質。通過嚴格的測試，經驗豐富的產品開發能力和使用優化的材料，提供專業的照明解決方案。近幾年，致力於開發無線照明控制，使用最新的技術並結合燈具設計。





Acofusion can provide a professional lighting solution that excels in optical performance and light quality. Nowadays, Acofusion brings the ultimate flexibility to the architectural and technical lighting, discreetly incorporates advanced engineered motors and wireless technology. The intelligent lighting system enables users to create different lighting scenes, selecting from an extensive range of projecting positions, beams and CCT. Our innovative technology and versatile control experience make the light intangible and possible.

兆合開發的智能照明系統使用戶能夠自行創建各種不同的照明場景，並自動調整照射位置，光束角和色溫，創新的技術和豐富的控制經驗，使光變得無形卻又無限可能。

Awards

**DESIGN PLUS**  
powered by: light+building



**reddot design award**  
winner 2019



**reddot winner 2021**  
lighting design



## Aco

### Circadian Smart Lighting System

Human-oriented circadian smart lighting provides users with a soothing and comfortable lighting environment. By using 2700-6000K CCT LED, glare-free designed fixtures and combined with a variety of control devices such as mobiles, wall keypads, remote controls, and sensors, Aco creates a healthy lighting environment for everyone, bringing more comfortable lighting scenes and ambiance.

以人為本的智慧節律照明，提供使用者更舒適的照明環境。2700-6000K的色溫控制及優秀的燈具防眩設計，結合多種控制設備，如手機、壁控、遙控器及感測器，創造出適合所有人的健康照明環境，帶來更舒適的生活場景及氛圍。



2700-6000K  
色溫調整



Scenes  
場景切換



Keypad  
壁控開關



Remote Control  
遙控器

Application



Living 居家



Retail 商店



Health 健康



Office 辦公室



Socket  
插座



Curtain  
窗帘



Air-conditioning  
空调



Sensor  
感应



Circadian Light  
人因节律

Download Aco Smart APP  
下载 Aco Smart APP



# Product Overview

Low-Voltage  
Ultrathin Magnet  
Track System  
低壓超薄磁吸  
軌道燈

9  
Spot



10  
Wall



11-12  
Linear



Low-Voltage  
Magnet Track  
System  
低壓磁吸燈

17-20  
Pendant



22-24  
Linear



26  
Wallwash



27-28  
Accent



31  
Celling mounted



32  
Beam shaper



32-34  
Spot



Track Light  
軌道燈

37-42  
FlexRay Series



43-44  
Verta Series



45-48  
Claro Series



49-52  
Mobi Series



53-56  
Ami Series



57-58  
Enzo Series



59-64  
Cubie Series



65-66  
Pro Series



67-68  
Matteo Series



69-74  
RoboTrac Series



Downlight  
崁燈

77-80  
Verta Series



81-82  
Luka Series



83-84  
Aria Series



85-88  
Oggi Series



89-92  
Forbes Series



93-94  
Prime Series



95-98  
Reynado Series



99-100  
Mondo Series



101-104  
Apollo Series



105-108  
Tango Series



109-112  
Timo Series



113-116  
Visi Series



117-120  
Helium Series



121-122  
Plat Series



123-128  
Ami Series



129-132  
Clone Series



133-138  
Boite Series



139-144  
Modus Series



145-148  
Brio Series



149-150  
Matrix Series



151-154  
RoboCan Series



155-158  
RoboRadar Series



Ceiling Light &  
Pendant Light  
吸頂燈&吊燈

161-162  
Stral Series



163-166  
Clio Series



167-170  
Brila Series



171-174  
Cylinder Series



Note:



Motorized fixture 電動燈具

## Lamina Series

9  
Spot



10  
Wall



11-12  
Linear



# Lamina Series



S53-TL-A

S66-1-TL-A

S32-TL-A

S47-2-TL-A

S31-TL-A

S47-TL-A

W32-3-TL-A

# Lamina

Lamina series: Ultra-thin magnetic design for easy installation, even lighting, and a stylish, functional lighting solution for your space.comprehensive range of professional recessed downlight.

S55-TL-A

Lamina 系列燈具以超薄磁吸系統設計，提供簡便安裝、均勻光線分佈，結合現代學與出色功能，為您的空間注入風格和照明解決方案。



S66-4-TL-A

S66-5-TL-A


P35-1-TL-A

P24-TL-A

W32-2-TL-A

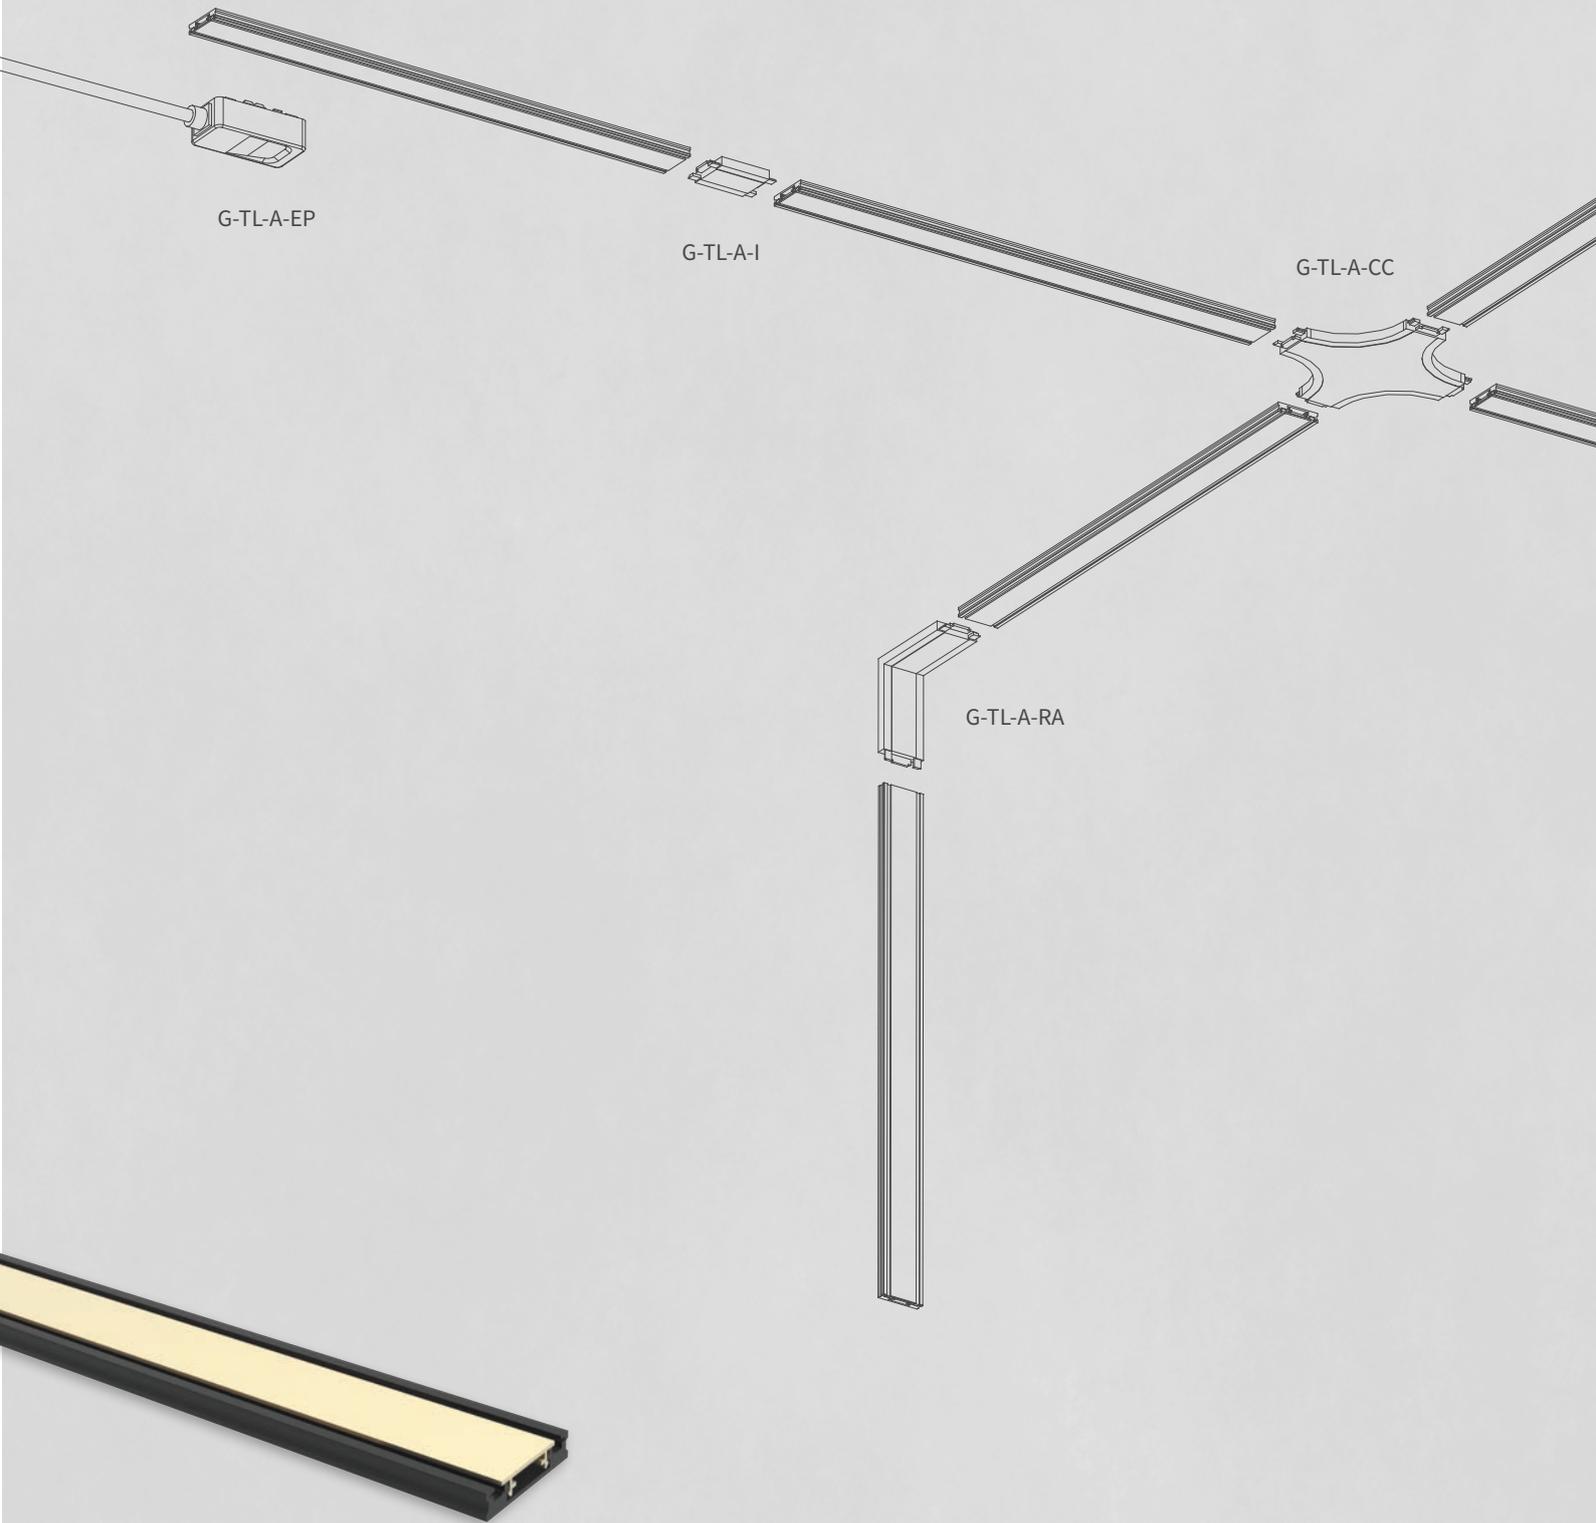


- G-TL-A-1M    L=1 meter
- G-TL-A-1.5M    L=1.5 meter
- G-TL-A-2M    L=2 meter

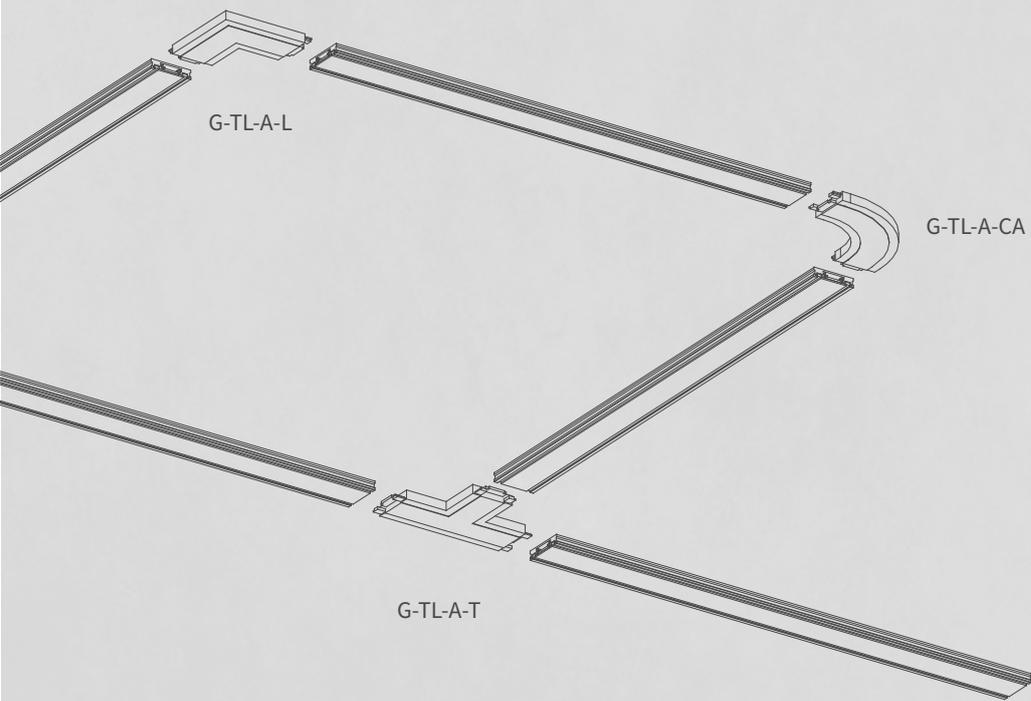


G-TL-A-EP

外置電源接駁器  
External power  
connector



G-TL-A-I

I型接駁器  
I connector




G-TL-A-L

L型接駁器  
L connector



G-TL-A-CA

圓弧型接駁器  
Circular arc  
connector




G-TL-A-RA

直角接駁器  
Right angle  
connector



G-TL-A-T

T型接駁器  
T connector

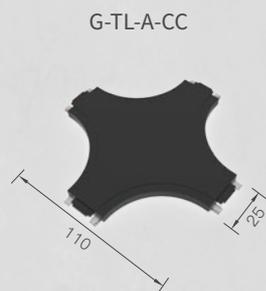

G-TL-A-CC

十字型接駁器  
Cross connector

# Lamina Series



Input Voltage 輸入電壓 DC 48V



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
S31-TL-A	10W	2700K/3000K/4000K/Tunable	18°-45°	370lm	≥90
S32-TL-A	10W	2700K/3000K/4000K*	10°+Magnetic filter 10°+磁吸濾片	420lm	≥90
S47-TL-A	7W	2700K/3000K/4000K	15°/24°/36°	460lm	≥90
S53-TL-A	12W	2700K/3000K/4000K/Tunable	15°/30°	650lm	≥90
S55-TL-A	7W	2700K/3000K/4000K/Tunable	15°/24°/36°	400lm	≥90

\* Tunable version with condition, please contact us. 可改為雙色溫版本，請聯繫我們。


## Accessories 配件

### Magnetic filter 磁吸濾片



### Front trim color 前環顏色

- Black 黑
- White 白
- Black Chrome 黑鉻
- Chrome 白鉻

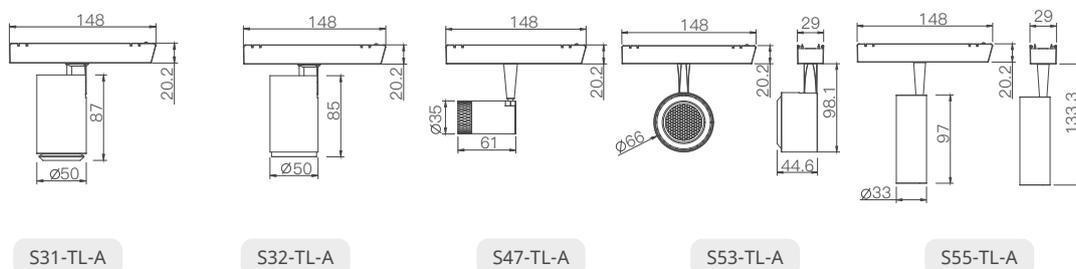

### Note:

The lumen measured at the system 3000K.

Technical information may change, please refer to the datasheet.

以上流明測量值以3000K為測量數據。

詳細技術信息，請參閱規格書。






Input Voltage 輸入電壓 DC 48V



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
P35-1-TL-A	6W	2700K/3000K/4000K	Flood 泛光	270lm	≥90
W32-1-TL-A	8W	2700K/3000K/4000K	Flood 泛光	220lm	≥90
W32-2-TL-A	8W	2700K/3000K/4000K	Flood 泛光	220lm	≥90
W32-3-TL-A	8W	2700K/3000K/4000K	Flood 泛光	220lm	≥90

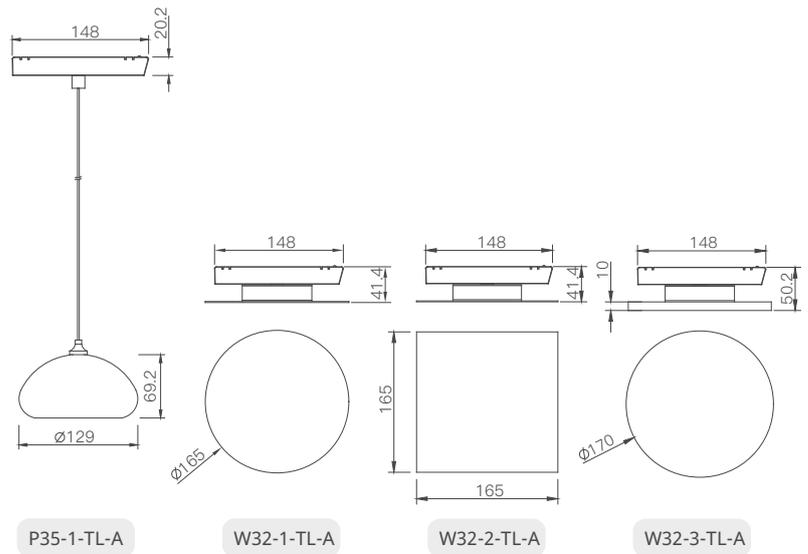


- Glass 玻璃
- Chrome 白鎳
  - Rose Golden 玫瑰金
  - Grey 灰
- Panel 面板
- Board 黑桃木
  - White 白
  - Black 黑

# Lamina Series

Input Voltage 輸入電壓 DC 48V

 Non-dim

Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
S66-1-TL-A	6W	2700K/3000K/4000K	24°/36°	490lm	≥90
S66-2-TL-A	6W	2700K/3000K/4000K	Flood 泛光	280lm	≥90
S66-3-TL-A	6W	2700K/3000K/4000K	Flood 泛光	66lm	≥90

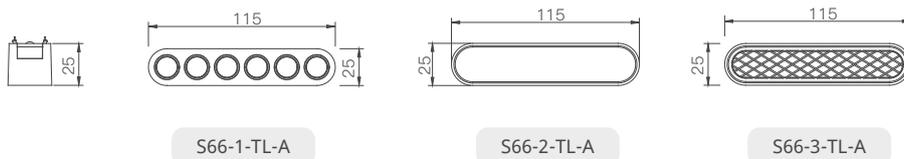

S66-1-TL-A

S66-2-TL-A

S66-3-TL-A

**Note:**

The lumen measured at the system 3000K.

Technical information may change, please refer to the datasheet.

以上流明測量值以3000K為測量數據。


詳細技術信息，請參閱規格書。




Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
S66-4-TL-A	12W	2700K/3000K/4000K	24°/36°	1000lm	≥90
S66-5-TL-A	12W	2700K/3000K/4000K	Flood 泛光	560lm	≥90
S66-6-TL-A	12W	2700K/3000K/4000K	Flood 泛光	140lm	≥90



S66-4-TL-A



S66-5-TL-A



S66-6-TL-A

○ White 白

● Black 黑





## Maga Series

17-20  
Pendant



22-24  
Linear



26  
Wallwash



27-28  
Accent



31  
Celling mounted



32  
Beam shaper



32-34  
Spot




# Magga Series

# Maga



P25-L

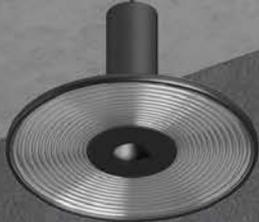

P25-1-L



P24-1-L



P24-1-L



P24-2-L



P24-L



P27-L



P21-L



P29-1-L



P29-1-L



P29-2-L



reddot winner 2021  
lighting design

# Maga Series

Input Voltage 輸入電壓 DC 48V



Non-dim



0-10V



DALI



Aco Smart



CASAMBI

Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
P21-L	10W	2700K/3000K/4000K*	10°+Magnetic filter 10°+磁吸濾片	420lm	≥90
P24-L	7W	2700K/3000K/4000K/Tunable	15°/20°/30°	400lm	≥90
P24-1-L	10W	2700K/3000K/4000K*	10°+Magnetic filter 10°+磁吸濾片	420lm	≥90
P24-2-L	7W	2700K/3000K/4000K/Tunable	15°/20°/30°	400lm	≥90

\* Tunable version with condition, please contact us. 可改為雙色溫版本，請聯繫我們。

## Accessories 配件

### Magnetic filter 磁吸濾片



15°



24°



38°



10°x35°



Honey comb


### Front trim color 前環顏色

● Black 黑


○ White 白

● Black Chrome 黑鉻


● Chrome 白鉻

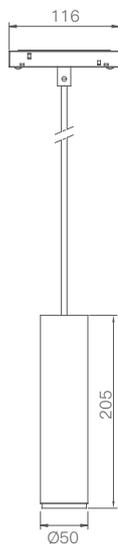

P21-L

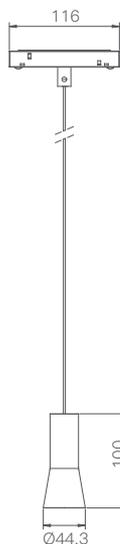

P24-L

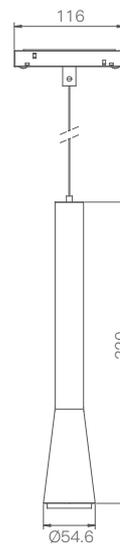

P24-1-L



P24-2-L

### Note:

The lumen measured at the system 3000K.


Technical information may change, please refer to the datasheet.

以上流明測量值以3000K為測量數據。

詳細技術信息，請參閱規格書。




Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
P25-L	7W	2700K/3000K/4000K/Tunable	24°/36°	610lm	≥90
P25-1-L	7W	2700K/3000K/4000K/Tunable	24°	360lm	≥90
P27-L	10W	2700K/3000K/4000K/Tunable	15°/24°	430lm	≥90
P29-1-L 	10W	2700K/3000K/4000K/Tunable	17°-45°	700lm	≥90
P29-2-L 	15W	2700K/3000K/4000K/Tunable	17°-45°	890lm	≥90

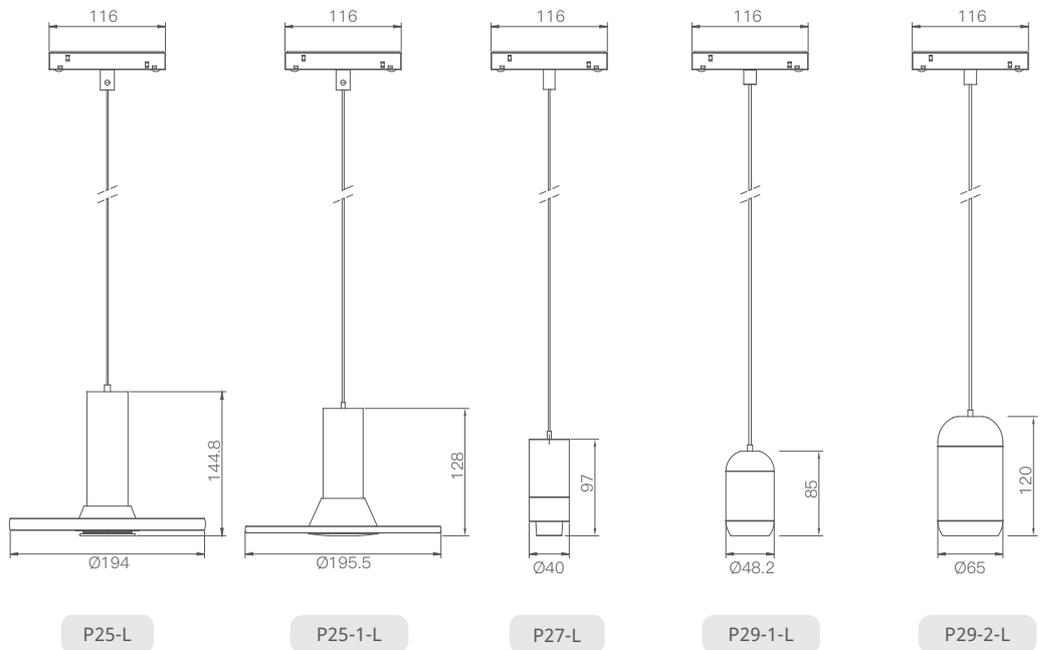

○ White 白

● Black 黑



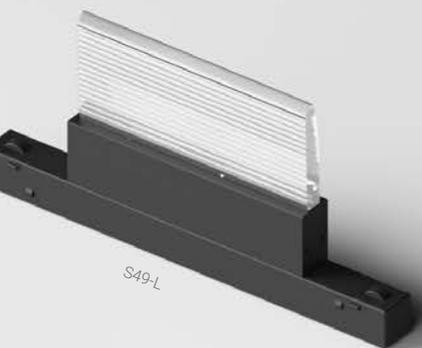

S49-L



S49-1-L



S49-2-L




S63-1-L



S63-2-L




S48-2-L

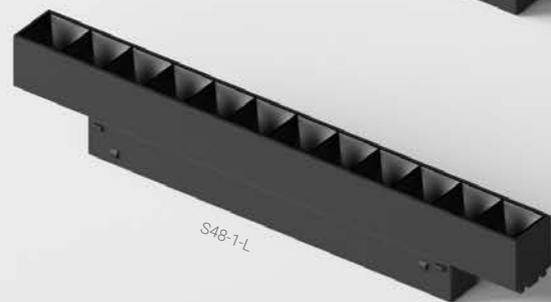

S48-1-L



S48-L

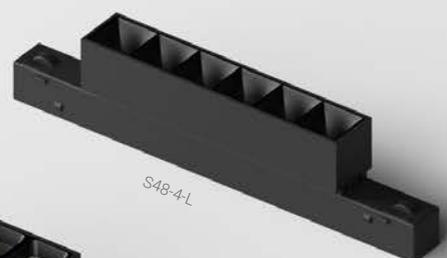

S48-4-L



S48-3-L



S57-2-L



S57-3-L



S57-1-L



S57-4-L

# Maga Series

Input Voltage 輸入電壓 DC 48V



Non-dim



0-10V



DALI




Aco Smart



CASAMBI

Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
S48-L	11W	2700K/3000K/4000K/Tunable	Flood 泛光	500lm	≥90
S48-1-L	11W	2700K/3000K/4000K	30°	430lm	≥90
S48-2-L	20W	2700K/3000K/4000K/Tunable	Flood 泛光	800lm	≥90
S48-3-L	20W	2700K/3000K/4000K	30°	700lm	≥90
S48-4-L	6W	2700K/3000K/4000K	40°	330lm	≥90

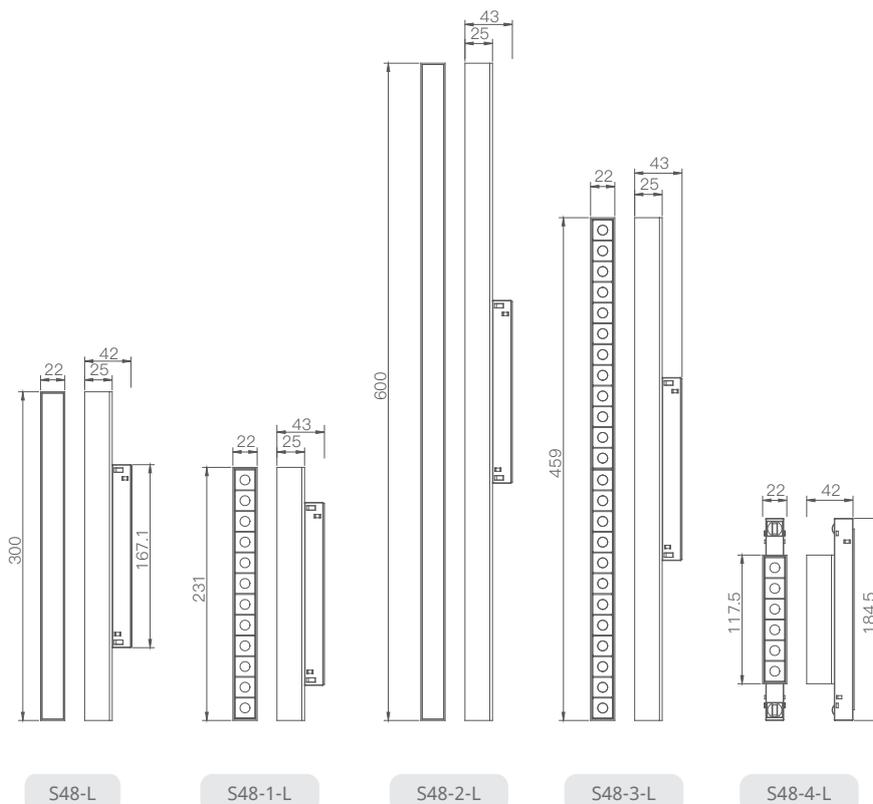

**Note:**

The lumen measured at the system 3000K.


Technical information may change, please refer to the datasheet.

以上流明測量值以3000K為測量數據。


詳細技術信息，請參閱規格書。




Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
S57-1-L	3W	2700K/3000K/4000K	24°/50°	240lm	≥90
S57-2-L	3W	2700K/3000K/4000K	45°	220lm	≥90
S57-3-L	6W	2700K/3000K/4000K	24°/50°	420lm	≥90
S57-4-L	6W	2700K/3000K/4000K	45°	430lm	≥90




S57-1-L



S57-2-L

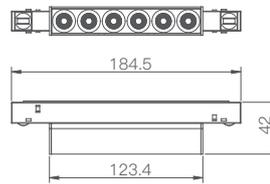

S57-3-L

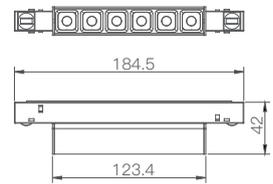

S57-4-L

○ White 白

● Black 黑




# Maga Series



Input Voltage 輸入電壓 DC 48V



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
S49-L	7W	2700K/3000K/4000K	Asymmetric wallwash 偏光洗牆	430lm	≥90
S49-1-L	12W	2700K/3000K/4000K	Asymmetric wallwash 偏光洗牆	520lm	≥90
S49-2-L	10W	2700K/3000K/4000K	Asymmetric wallwash 偏光洗牆	600lm	≥90
S63-1-L	6W	2700K/3000K/4000K/Tunable	24°	450lm	≥90
S63-2-L	12W	2700K/3000K/4000K/Tunable	24°	860lm	≥90
S60-L	12W	2700K/3000K/4000K/Tunable	Asymmetric wallwash 偏光洗牆	640lm	≥90

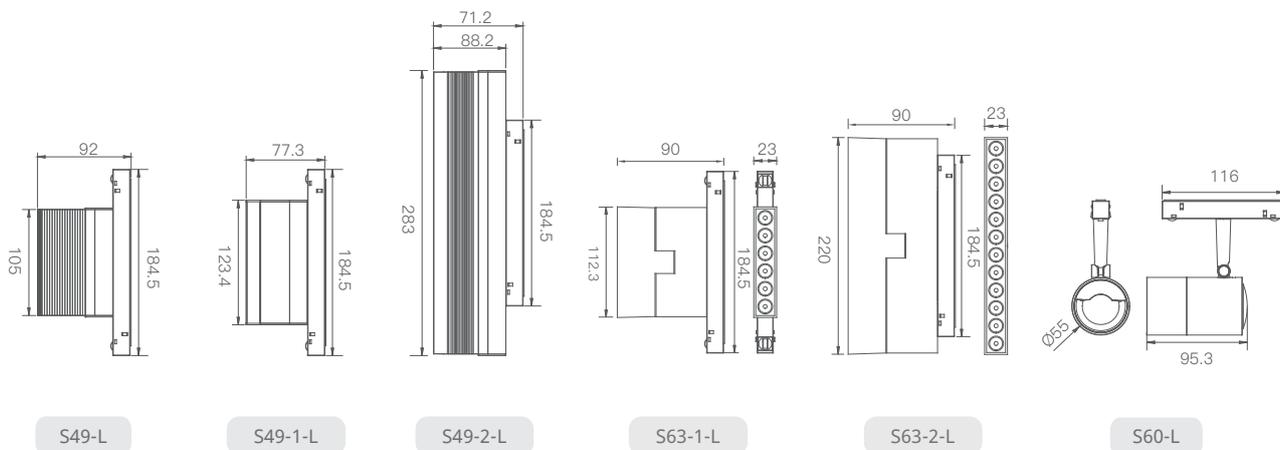

S49-L

S49-1-L

S49-2-L

S63-1-L

S63-2-L

S60-L

Note:

The lumen measured at the system 3000K.

Technical information may change, please refer to the datasheet.

以上流明測量值以3000K為測量數據。

詳細技術信息，請參閱規格書。

○ White 白

● Black 黑



# Maga Series



Input Voltage 輸入電壓 DC 48V



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
S31-L	10W	2700K/3000K/4000K/Tunable	18°-45°	370lm	≥90
S31-1-L	10W	2700K/3000K/4000K/Tunable	18°-45°	370lm	≥90
S32-L	9W	2700K/3000K/4000K*	10°+Magnetic filter 10°+磁吸濾片	420lm	≥90
S32-1-L	9W	2700K/3000K/4000K*	10°+Magnetic filter 10°+磁吸濾片	420lm	≥90
S55-L	7W	2700K/3000K/4000K/Tunable	15°/24°/36°	400lm	≥90

\* Tunable version with condition, please contact us. 可改為雙色溫版本，請聯繫我們。


## Accessories 配件

### Magnetic filter 磁吸濾片



### Front trim color 前環顏色

- Black 黑
- White 白
- Black Chrome 黑鉻
- Chrome 白鉻

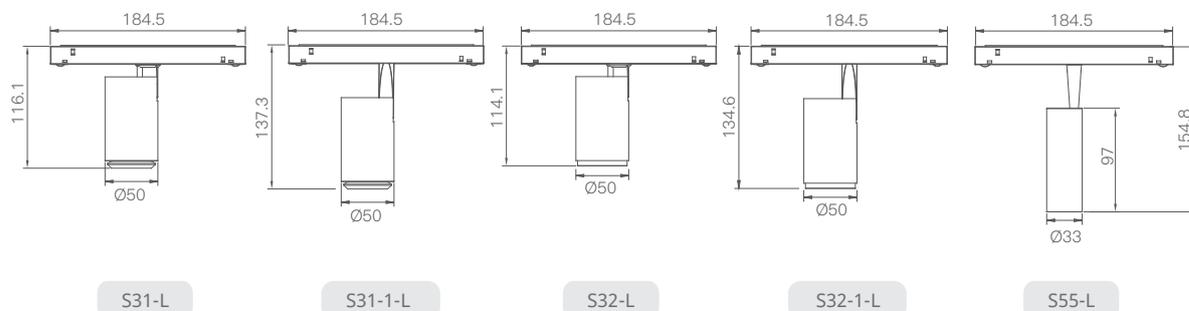

### Note:

The lumen measured at the system 3000K.

Technical information may change, please refer to the datasheet.

以上流明測量值以3000K為測量數據。

詳細技術信息，請參閱規格書。

○ White 白

● Black 黑



S58-L



S60-L



S47-3-L



S47-2-L



S50-1-L



S55-L



S50-L



S55-L



S47-L



S52-1-L



S52-6-L



S59-L



S61-1-L



S31-1-L



S31-L



S47-1-L



S32-1-L



S60-L



S53-1-L



S52-5-L



S52-L



S52-L-D



S53-1-L



S51-L

# Maga Series

Input Voltage 輸入電壓 DC 48V



Non-dim



0-10V



DALI



Aco Smart



CASAMBI

Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
S50-L	9W	2700K/3000K/4000K*	10°+Magnetic filter 10°+磁吸濾片	420lm	≥90
S50-1-L	9W	2700K/3000K/4000K*	10°+Magnetic filter 10°+磁吸濾片	420lm	≥90
S51-L	3W	2700K/3000K/4000K/Tunable	30°	190lm	≥90
S51-L-D	3W*2	2700K/3000K/4000K/Tunable	30°	190lm*2	≥90

\* Tunable version with condition, please contact us. 可改為雙色溫版本，請聯繫我們。

## Accessories 配件

### Magnetic filter 磁吸濾片



15°



24°



38°




10°x35°




Honey comb

### Front trim color 前環顏色


- Black 黑
- White 白
- Black Chrome 黑鉻
- Chrome 白鉻




S50-L



S50-1-L



S51-L

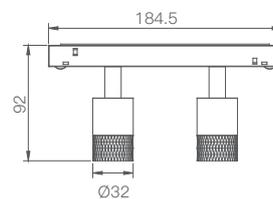

S51-L-D

### Note:

The lumen measured at the system 3000K.


Technical information may change, please refer to the datasheet.

以上流明測量值以3000K為測量數據。


詳細技術信息，請參閱規格書。




Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
S61-1-L	12W	2700K/3000K/4000K	Beam Shaper 切光	190lm	≥90
S59-L	12W	2700K/3000K/4000K/Tunable	24°/36°	750lm	≥90
S52-L	5W	2700K/3000K/4000K	15°/24°/36°	360lm	≥90
S52-L-D	5W*2	2700K/3000K/4000K	15°/24°/36°	360lm*2	≥90

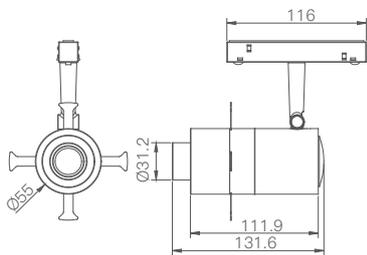


S61-1-L

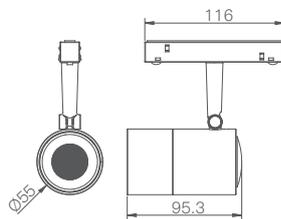

S59-L



S52-L

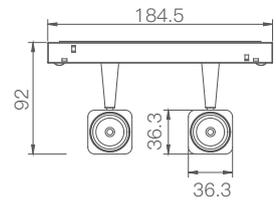

S52-L-D

Gold 金

Chrome 白鎳

White 白


Black 黑

# Maga Series

Input Voltage 輸入電壓 DC 48V



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
S47-L	7W	2700K/3000K/4000K	15°/20°/30°	470lm	≥90
S47-L-D	7W*2	2700K/3000K/4000K	15°/20°/30°	470lm*2	≥90
S47-1-L	7W	2700K/3000K/4000K	15°/20°/30°	470lm	≥90
S47-2-L	11W	2700K/3000K/4000K/Tunable	15°/24°/36°	900lm	≥90
S47-3-L	11W	2700K/3000K/4000K/Tunable	15°/24°/36°	900lm	≥90

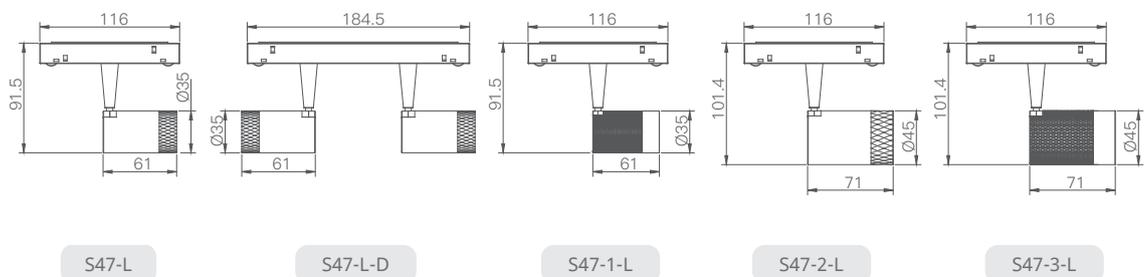

S47-L

S47-L-D

S47-1-L

S47-2-L

S47-3-L

**Note:**

The lumen measured at the system 3000K.

Technical information may change, please refer to the datasheet.

以上流明測量值以3000K為測量數據。

詳細技術信息，請參閱規格書。



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
S52-1-L	9W	2700K/3000K/4000K*	10°+Magnetic filter 10°+磁吸濾片	420lm	≥90
S52-5-L	10W	2700K/3000K/4000K	10°	550lm	≥90
S52-6-L	9W	2700K/3000K/4000K	24°/50°	680lm	≥90
S53-L	12W	2700K/3000K/4000K/Tunable	15°/30°	650lm	≥90
S58-L	12W	2700K/3000K/4000K/Tunable	17°-45°	730lm	≥90

\* Tunable version with condition, please contact us. 可改為雙色溫版本，請聯繫我們。


#### Accessories 配件

##### Magnetic filter 磁吸濾片



##### Front trim color 前環顏色

- Black 黑
- White 白
- Black Chrome 黑鉻
- Chrome 白鉻

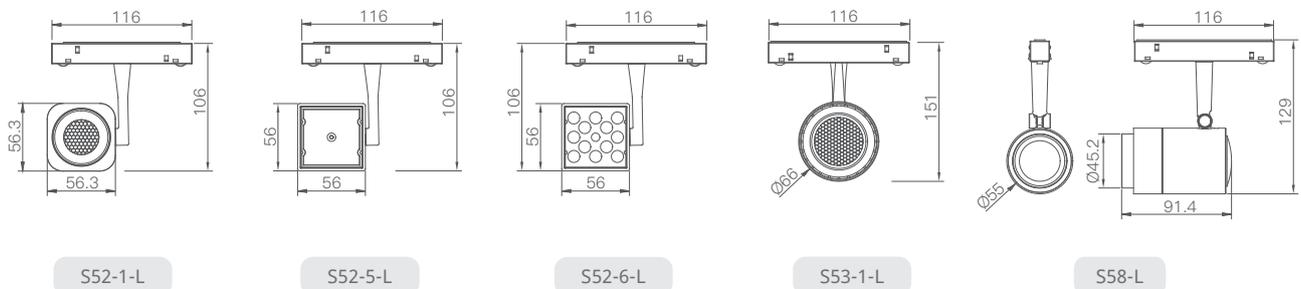

- White 白
- Black 黑

## Track Light

37-42  
FlexRay Series



43-44  
Verta Series



45-48  
Claro Series



49-52  
Mobi Series



53-56  
Ami Series



57-58  
Enzo Series



59-64  
Cubie Series



65-66  
Pro Series



67-68  
Matteo Series



69-74  
RoboTrac Series



# Track Light

FlexRay series lighting fixtures maximize module versatility, distinctive aesthetics, and multi-angle filters and color temperature adjustments to provide a creatively unique lighting solution, allowing you to enjoy a one-of-a-kind lighting experience.

FlexRay 系列燈具，充分發揮多變的模組選擇、獨創的外觀風格以及多角度濾片和色溫片，帶來極具創意的照明解決方案，讓您自由發揮獨一無二的照明體驗。



S71-3



S71-2



S70-3



S70-2



S72-1



S70-1



S71-1




# FlexRay





The uniquely captivating design exudes a one-of-a-kind beauty, creating artistic illumination with rich shapes and distinctive styles, bringing a refreshing touch to the space.

獨特而迷人的外觀設計散發著獨一無二的美感，透過豐富的形狀和獨到的風格，打造出獨具藝術性的照明，讓空間煥然一新。

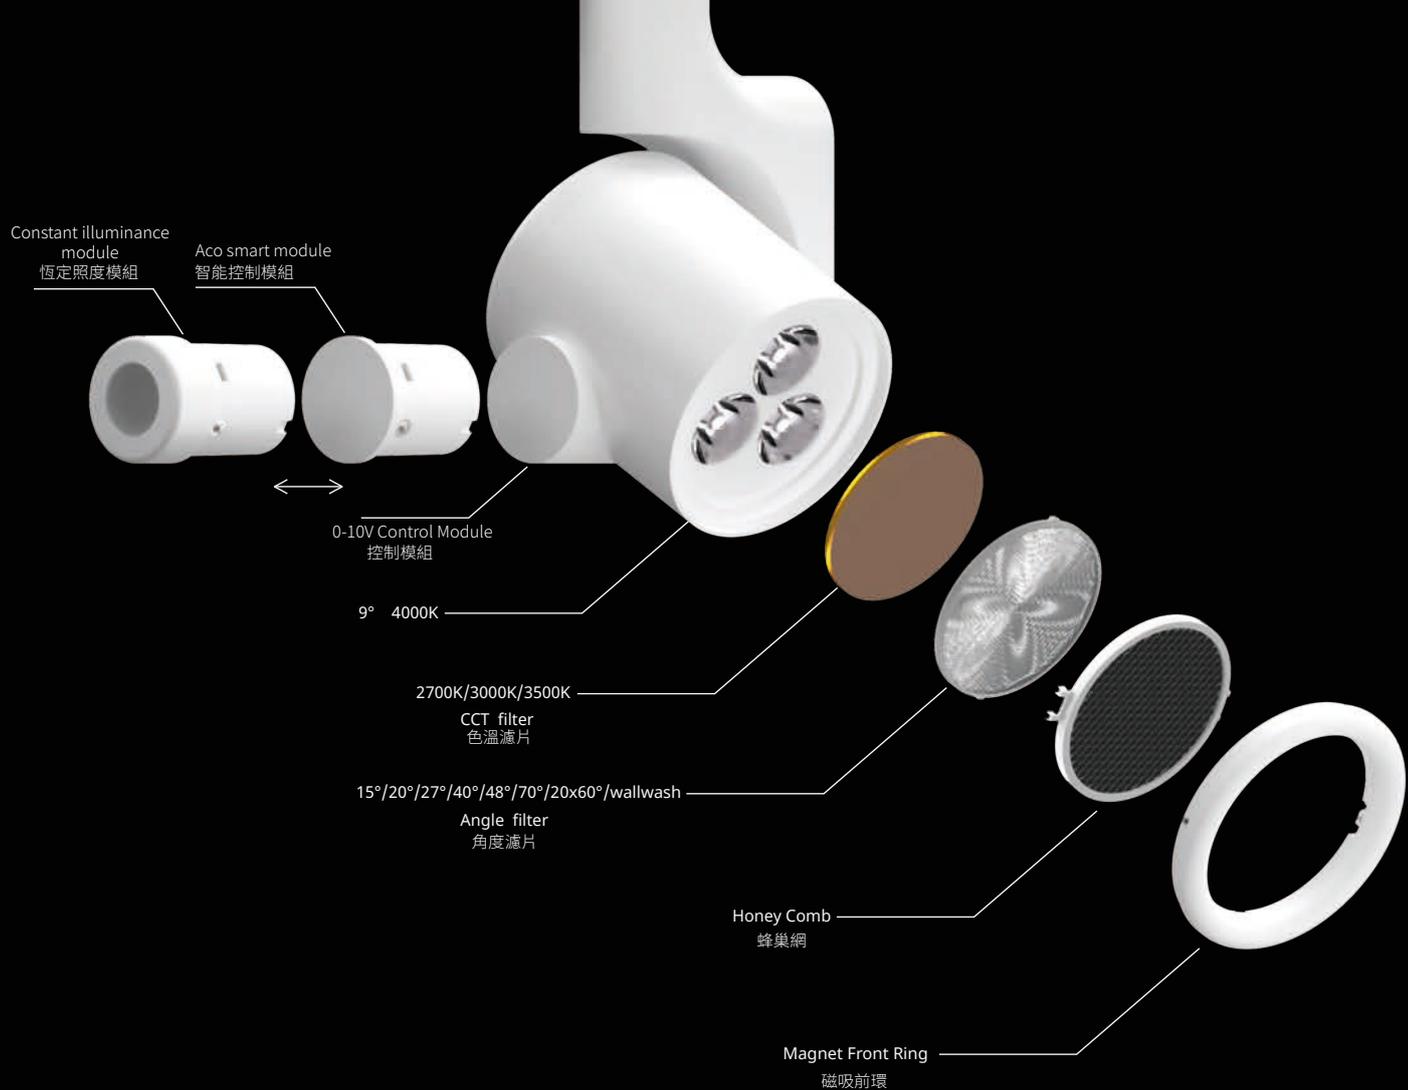

Bluetooth dimming system offers highly customizable scene control, enabling users to independently adjust lighting fixtures' color temperature, brightness, and on/off timing, providing exceptional user operability.

藍芽調光系統，提供高度個性化的場景控制，允許用戶輕鬆自行調整燈具的色溫、亮度以及啟動和關閉時間，實現卓越的操作自由度。

# FlexRay Series

Input Voltage 輸入電壓 100-240Vac 50/60Hz




Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	SDCM 色容差	BA 光束角	Luminous Flux 光通量	CRI 顯色指數
S70-1	4W	4000K	≤2	5°+CCT filter 5°+色溫濾片	150lm	≥97
S70-2	10W	4000K	≤2	5°+CCT filter 5°+色溫濾片	620lm	≥97
S70-3	27W	4000K	≤2	5°+CCT filter 5°+色溫濾片	1340lm	≥97

## 控制模組/Control module



## 光学配件/Front Ring Color

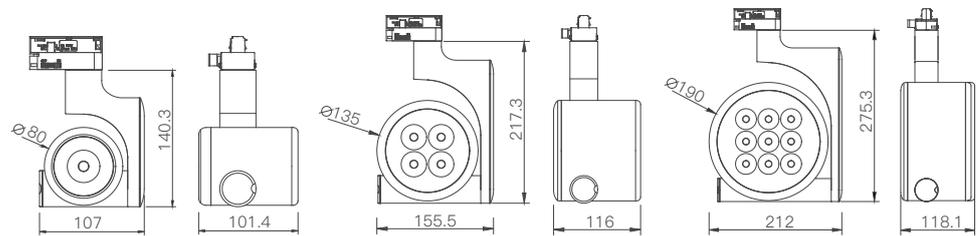

S70-1

S70-2

S70-3

### Note:

The lumen measured at the system 3000K.


Technical information may change, please refer to the datasheet.

以上流明測量值以3000K為測量數據。

詳細技術信息，請參閱規格書。



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	SDCM 色容差	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
S71-1	9W	4000K	≤2	9°+Angle/CCT filter 9°+角度/色溫濾片	410lm	≥97
S71-2	27W	4000K	≤2	9°+Angle/CCT filter 9°+角度/色溫濾片	1360lm	≥97
S71-3	50W	4000K	≤2	9°+Angle/CCT filter 9°+角度/色溫濾片	2570lm	≥97
S72-1	 10W	Tunable	≤2	12°-68°	660lm	≥97

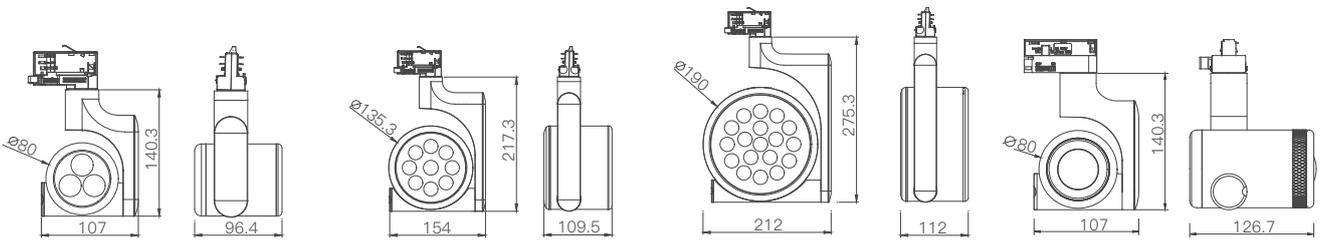

S71-1

S71-2

S71-3

S72-1

○ White 白

● Black 黑

The unique groove design on the lamp body bestows it with a distinctive charm, creating a striking contrast to traditional designs.

燈體特殊的凹槽設計，賦予它與眾不同的外觀風采，與傳統設計形成鮮明對比。



# Verta


# Verta Series



Input Voltage 輸入電壓 100-240Vac 50/60Hz



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
S11-1	7W	2700K/3000K/4000K/Tunable	24°/36°	540lm	≥90
S11-2	10W	2700K/3000K/4000K/Tunable	24°/36°	900lm	≥90
S11-3	18W	2700K/3000K/4000K/Tunable	24°/36°	1680lm	≥90

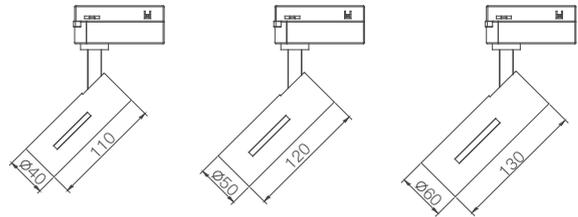

S11-1

S11-2

S11-3

**Note:**

The lumen measured at the system 3000K.  
 Technical information may change, please refer to the datasheet.  
 以上流明測量值以3000K為測量數據。  
 詳細技術信息，請參閱規格書。

○ White 白


● Grey 灰



# Claro

This series boasts a unique play of light, with sharp contours complemented by special filters. Beyond illuminating the space, the light takes on an artistic role, sculpting diverse and captivating forms.

此系列展現獨特的光影魅力，清晰的輪廓線條搭配獨特的濾片，讓光不僅為空間帶來照明，更能塑造出多變的藝術造型。

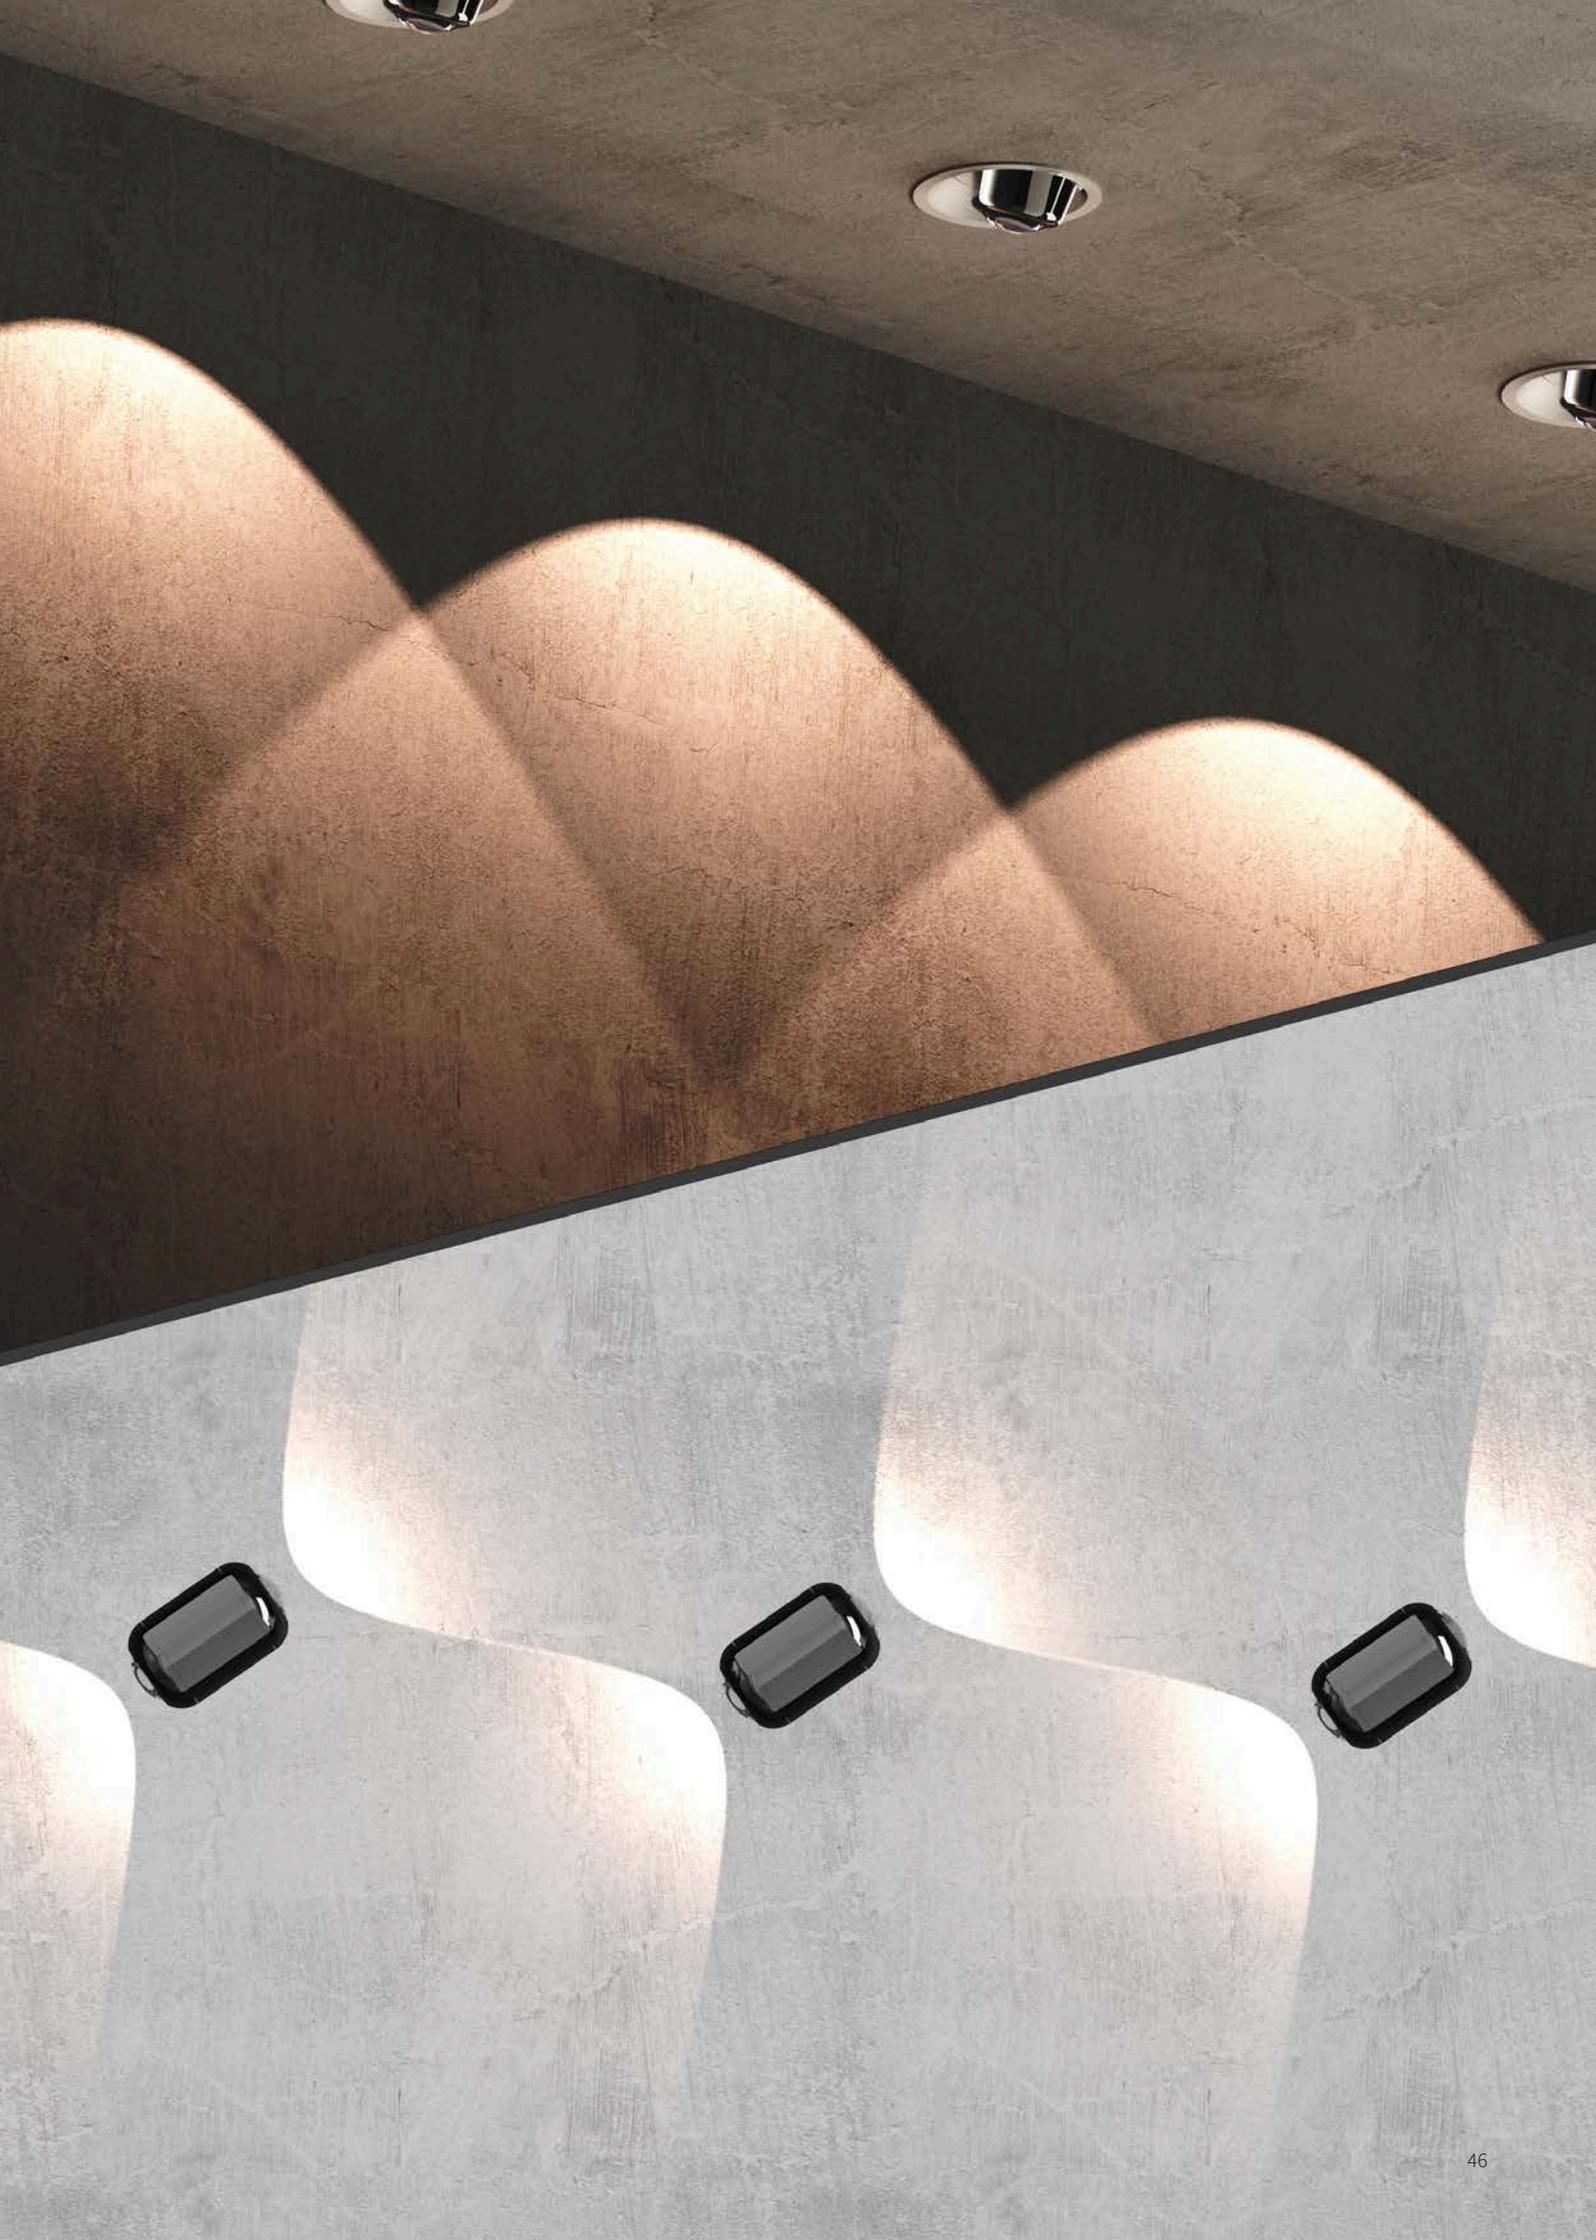


≡ CUB1  
19 代 世



# MORGAN

MOTOR COMPANY

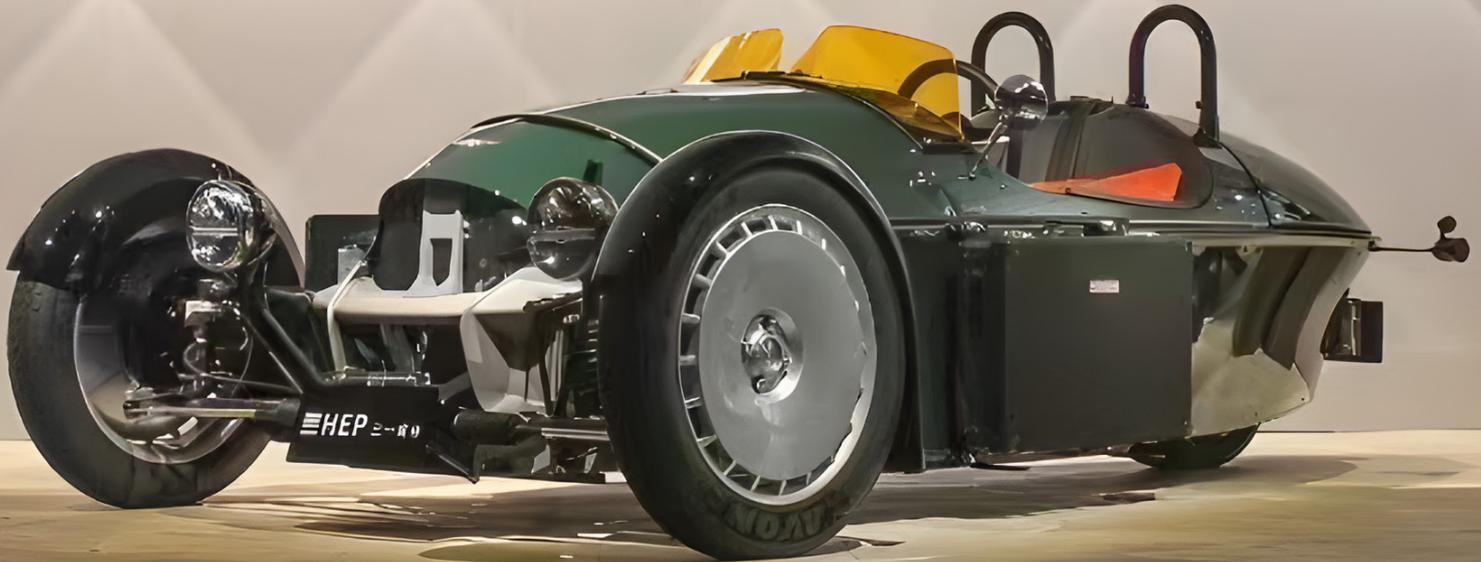

# Claro Series



Input Voltage 輸入電壓 100-240Vac 50/60Hz



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
D124-1  	10W	2700K/3000K/4000K/Tunable	85°	920lm	≥90
D124-2  	10W	2700K/3000K/4000K/Tunable	85°	920lm	≥90
S55-1  	10W	2700K/3000K/4000K/Tunable	80°	850lm	≥90
W35-1	10W*2	2700K/3000K/4000K/Tunable	85°	920lm*2	≥90

## 彩色濾片/Color Filters




Indigo Purple  
幽藍紫



Lagoon Blue  
湖藍紫



Sunset Red  
夕陽紅

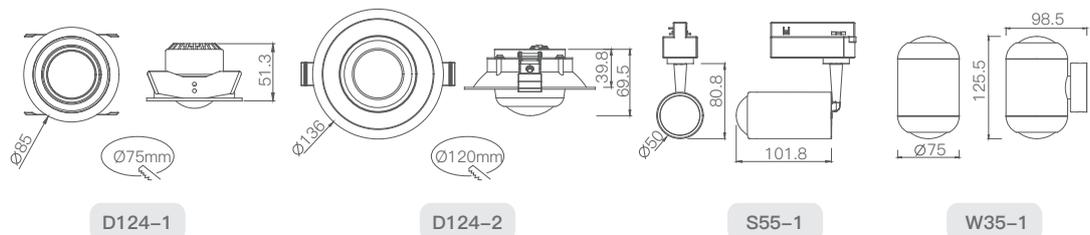

### Note:

The lumen measured at the system 3000K.  
Technical information may change, please refer to the datasheet.  
以上流明測量值以3000K為測量數據。  
詳細技術信息，請參閱規格書。





S61-4

S58

S60

S61-1

S59

Mobi



The MOBI series stands out for its unique and versatile features, offering beam shaping, logo projection, wall washing, zooming, and foundational illumination—a flexible choice for diverse lighting needs.

以其獨特的多元功能，MOBI 系列脫穎而出。不僅擁有切光、Logo 光影等特點，還能實現洗牆、變焦和基礎照明，成為滿足各種照明需求極具彈性的選擇。




# Mobi Series



Input Voltage 輸入電壓 100-240Vac 50/60Hz



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
S58 	12W	2700K/3000K/4000K/Tunable	17°-45°	730lm	≥90
S59	12W	2700K/3000K/4000K/Tunable	24°/36°	750lm	≥90
S60	12W	2700K/3000K/4000K/Tunable	Asymmetric wallwash 偏光洗牆	650lm	≥90
S61-1	12W	2700K/3000K/4000K	Beam Shaper 切光	190lm	≥90
S61-4	12W	2700K/3000K/4000K/Tunable	Gobo Light 投影燈	720lm	≥90

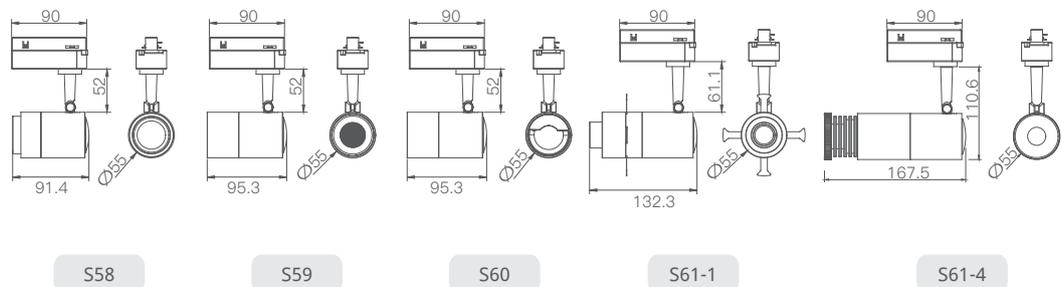

**Note:**

The lumen measured at the system 3000K.  
 Technical information may change, please refer to the datasheet.  
 以上流明測量值以3000K為測量數據。  
 詳細技術信息，請參閱規格書。

○ White 白

● Black 黑

# Ami



The Ami series of fixtures, with changeable front ring filters, creates stunning lighting effects and offers diverse and captivating solutions for various settings.

Ami 系列燈具以前環濾片的可變角度，營造令人驚豔的照明效果，為各種場景提供多樣化和吸引人的解決方案。





# Ami Series



Input Voltage 輸入電壓 100-240Vac 50/60Hz



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
S8-2	15W	2700K/3000K/4000K/Tunable	10°+Magnetic filter 10°+磁吸濾片	800lm	≥90
S13-2	35W	2700K/3000K/4000K/Tunable	10°+Magnetic filter 10°+磁吸濾片	2200lm	≥90
S16-1	23W	2700K/3000K/4000K	10°/15°/25°/30° 15°x30°/30°x60°	1700lm	≥90
S32	10W	2700K/3000K/4000K*	10°+Magnetic filter 10°+磁吸濾片	420lm	≥90

\*Tunable version with condition, please contact us. 可改為雙色溫版本，請聯繫我們。

## Accessories 配件

### S32 Magnetic filter 磁吸濾片




### S8-2 S13-2 Magnetic filter 磁吸濾片



### Front trim color 前環顏色

- Black 黑
- White 白
- Black Chrome 黑鉻
- Chrome 白鉻

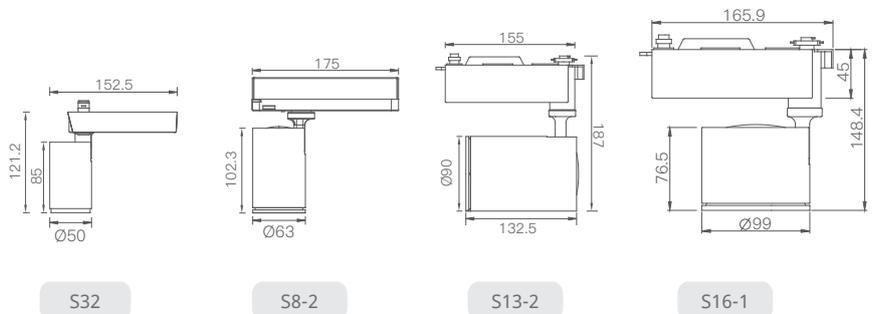

### Note:

The lumen measured at the system 3000K.

Technical information may change, please refer to the datasheet.

以上流明測量值以3000K為測量數據。

詳細技術信息，請參閱規格書。

○ White 白

● Black 黑



Tailored for commercial spaces, boasting superior power, efficiency, and brightness. Its sleek design ensures an exceptional lighting experience.

專為商業空間打造，擁有優越的功率、效能和亮度，簡約俐落的燈體設計，為商業場所提供極致照明體驗。

# Enzo



# Enzo Series



Input Voltage 輸入電壓 100-240Vac 50/60Hz



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
S43	33W	2700K/3000K/4000K/Tunable	15°/24°/38°	3200lm	≥90
S43-1	33W	2700K/3000K/4000K/Tunable	15°/24°/38°	3000lm	≥90

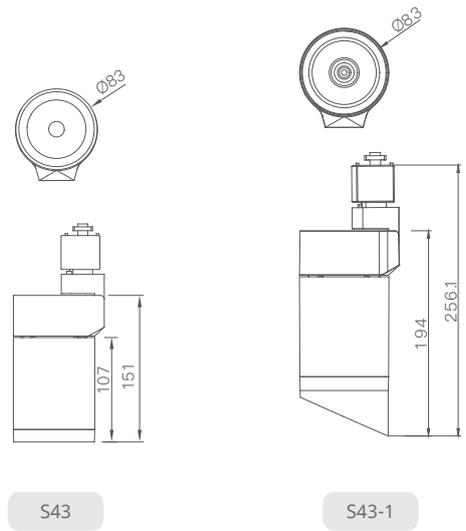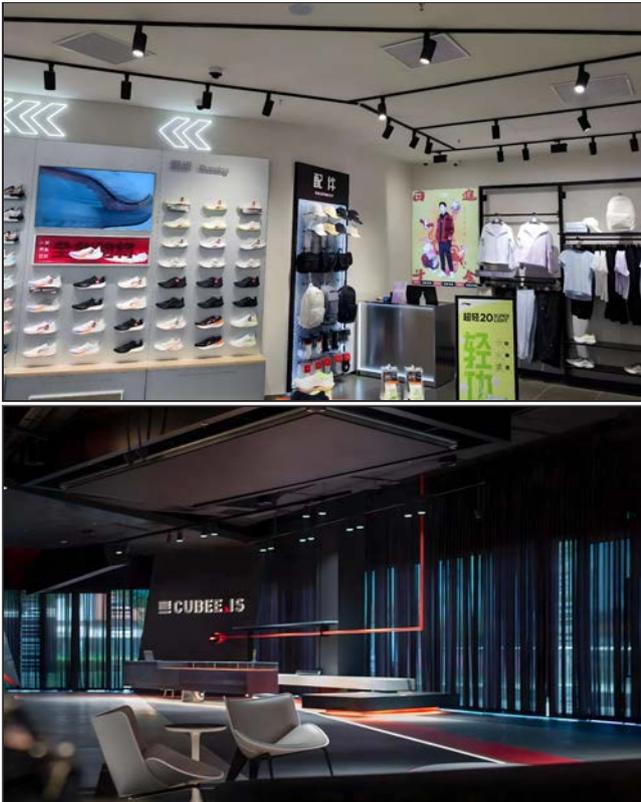

**Note:**

The lumen measured at the system 3000K.  
 Technical information may change, please refer to the datasheet.  
 以上流明測量值以3000K為測量數據。  
 詳細技術信息，請參閱規格書。

○ White 白

● Black 黑

# Cubie



S40-1

S40-3



S40-2



S40




## Evolution of Light

Cubie track light provides the simplest way to change the light module and the outlook pattern.  
燈具的新革命，Cubie 軌道燈提供最簡易更換模組的系統，不須工具即可替換模組外觀圖樣

Fast change the light module without tool.  
通過推拉固定裝置，快速更換燈具模組。



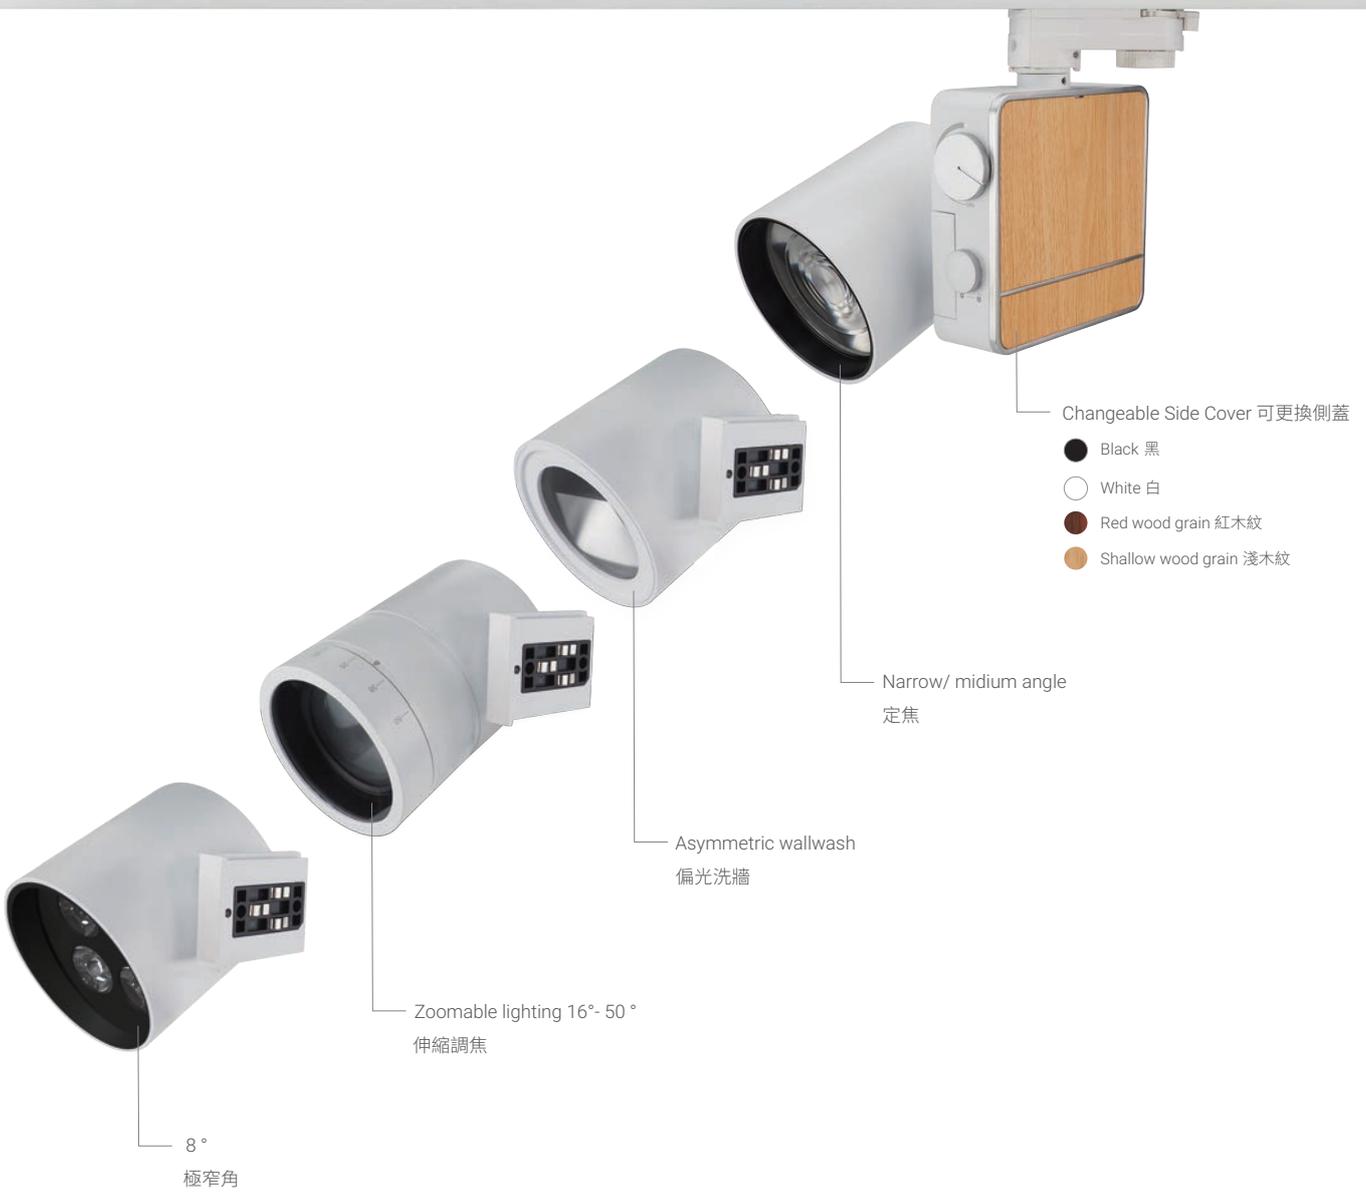

reddot award 2019  
winner



S40

Zoomable-wide angle  
伸縮 - 大角度

S40-3

Super narrow  
極窄角

S40

Zoomable-narrow angle  
伸縮 - 小角度

S40-1

Narrow/ midium angle  
定焦

S40-2

Asymmetric wallwash  
偏光洗牆

The Cubie series offers multiple angles to choose from and allows for customizing exclusive lighting effects, making the space more layered.

Cubie 系列有多種角度可供選擇，定制專屬的燈光效果，讓空間更富有層次。


# Cubie Series



Input Voltage 輸入電壓 100-240Vac 50/60Hz



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
S40 	35W	2700K/3000K/4000K	16°-50°	2200lm	≥90
S40-1	35W	2700K/3000K/4000K	15°/24°/36°	2300lm	≥90
S40-2	35W	2700K/3000K/4000K	Asymmetric wallwash 偏光洗牆	2100lm	≥90
S40-3	22W	2700K/3000K/4000K	8°	1730lm	≥90

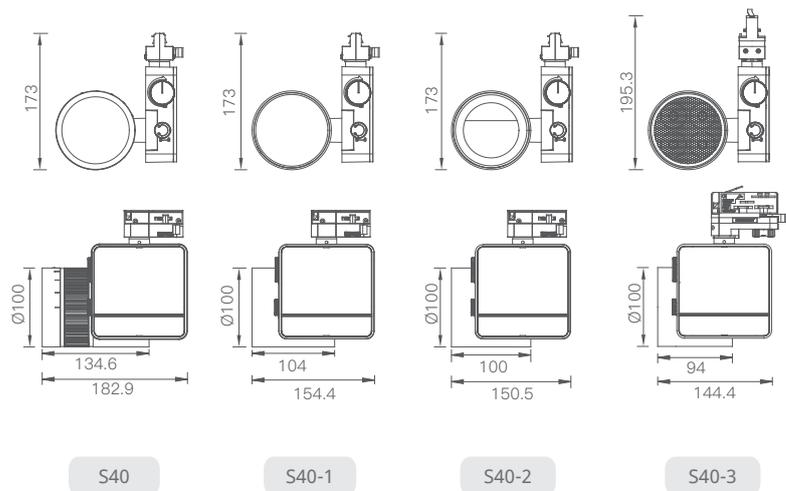

**Note:**

The lumen measured at the system 3000K.  
 Technical information may change, please refer to the datasheet.  
 以上流明測量值以3000K為測量數據。  
 詳細技術信息，請參閱規格書。

○ White 白

● Black 黑



Pro

# Pro Series



Input Voltage 輸入電壓 100-240Vac 50/60Hz



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
S7	27W	2700K/3000K/4000K/Tunable	80°	1700lm	≥90
S7-1	26W	2700K/3000K/4000K	5°	2200lm	≥90
S7-2	27W	2700K/3000K/4000K/Tunable	15°/24°/36°	2400lm	≥90
S7-3	27W	2700K/3000K/4000K/Tunable	17°-45°	1800lm	≥90

## Accessories 配件




Bran door  
遮光片



Super narrow spot  
極窄角



Patented beam adjustable optic  
專利調焦光學

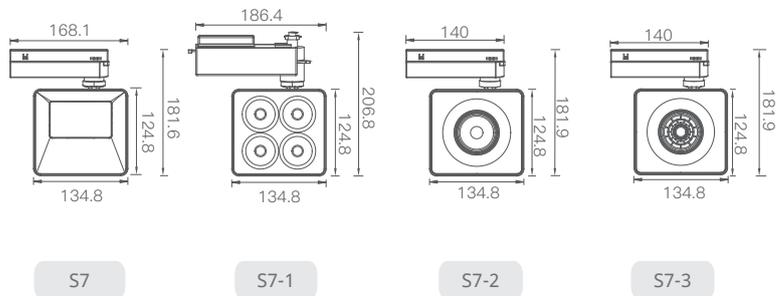


## Note:

The lumen measured at the system 3000K.  
Technical information may change, please refer to the datasheet.  
以上流明測量值以3000K為測量數據。  
詳細技術信息，請參閱規格書。

○ White 白

● Black 黑

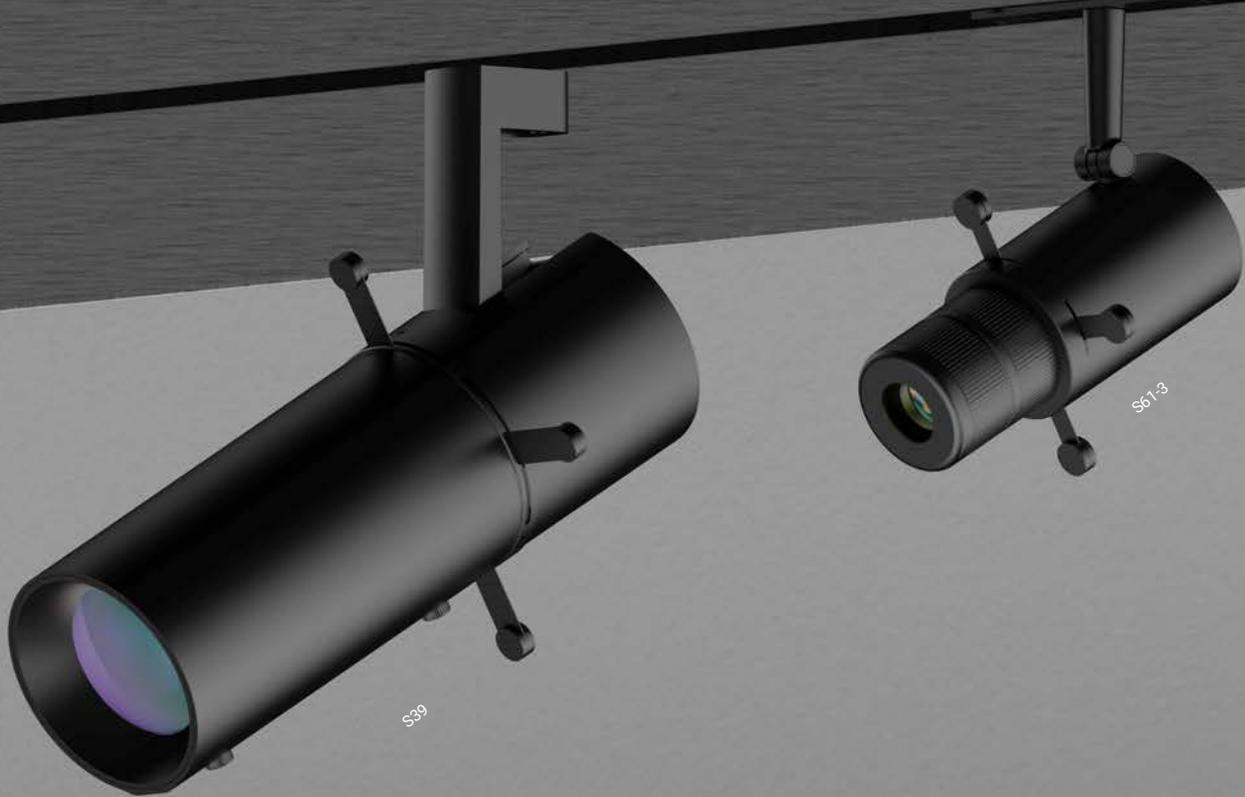

Precision-crafted beam-cutting light in two sizes. Four adjustable slices offer users versatile and creative lighting effects, perfect for dynamic commercial spaces.

匠心打造的切光燈，提供兩種尺寸選擇。燈體上的四片切片允許使用者自由變化，展現多樣的光影效果，充滿多變性和獨特的創造力。



# Matteo


# Matteo Series



Input Voltage 輸入電壓 100-240Vac 50/60Hz



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
S39	25W	2700K/3000K/4000K/Tunable	18°-25°	1100lm	≥90
S61-3	12W	2700K/3000K/4000K/Tunable	27°-38°	370lm	≥90

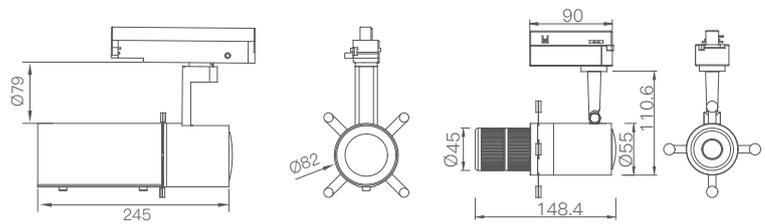

S39


S61-3

**Note:**

The lumen measured at the system 3000K.  
 Technical information may change, please refer to the datasheet.  
 以上流明測量值以3000K為測量數據。  
 詳細技術信息，請參閱規格書。

○ White 白

● Black 黑

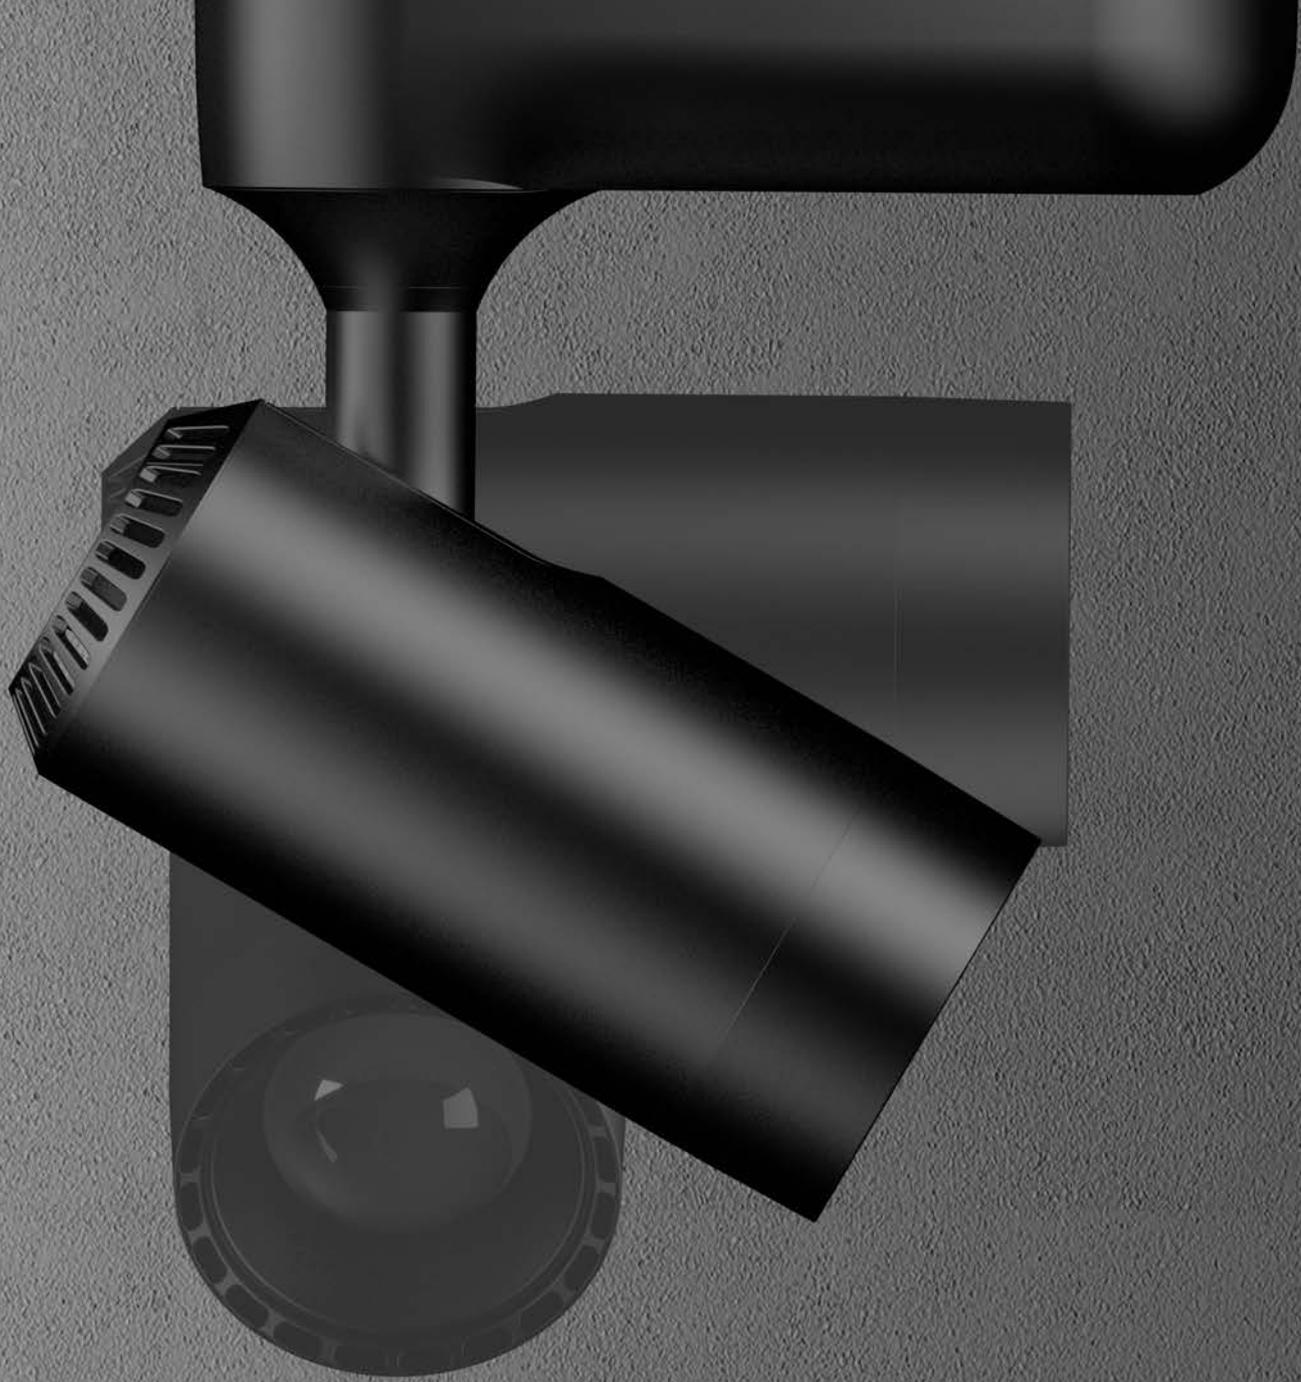

RoboTrac



**DESIGN PLUS**  
powered by: **light+building**

# RoboTrac Series

Input Voltage 輸入電壓 100-240Vac 50/60Hz



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
S21-2	28W	2700K/3000K/4000K	7°	2550lm	≥90
S21-2-A	28W	2700K/3000K/4000K/Tunable	20°/25°/45°	2200lm	≥90
S21-1	 28W	2700K/3000K/4000K/Tunable	12°-55°	1700lm	≥90

## Accessories 配件



Honeycomb  
蜂巢網




ZigBee Gateway  
ZigBee 網關

## Android available 適用安卓



Download LynxPro APP  
下載 LynxPro APP

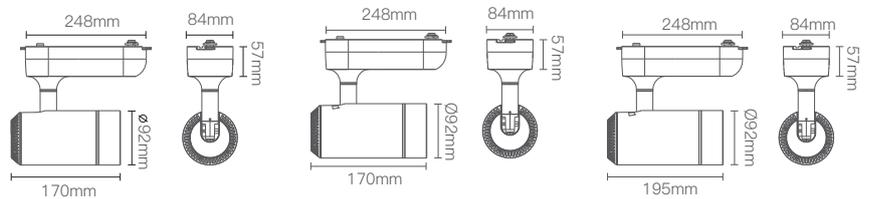

S21-2

S21-2-A

S21-1

### Note:

The lumen measured at the system 3000K.

Technical information may change, please refer to the datasheet.

以上流明測量值以3000K為測量數據。

詳細技術信息，請參閱規格書。



 2.4G

Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
S21-3-A	28W	2700K/3000K/4000K	7°	2550lm	≥90
S21-3-B	28W	2700K/3000K/4000K/Tunable	20°/25°/45°	2200lm	≥90
S21-3 	28W	2700K/3000K/4000K/Tunable	12°-55°	1700lm	≥90


Accessories 配件



Honeycomb  
蜂巢網



2.4G Remote Control  
2.4G遙控器

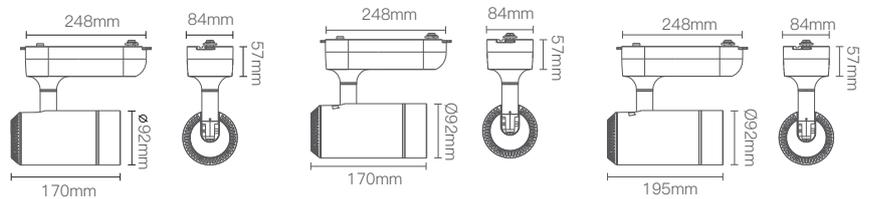

S21-3-A

S21-3-B

S21-3

 White 白

 Black 黑

A new era of ease of use, simply via Zigbee and Bluetooth mesh 照明新紀元



Dimming 調光




CCT Change 調色溫



Different Angle 角度選擇



Luminaire Rotation 燈具旋轉



Group 群控



Scene 場景




Schedule 排程



Floor Map 樓面地圖



Statistics 報表

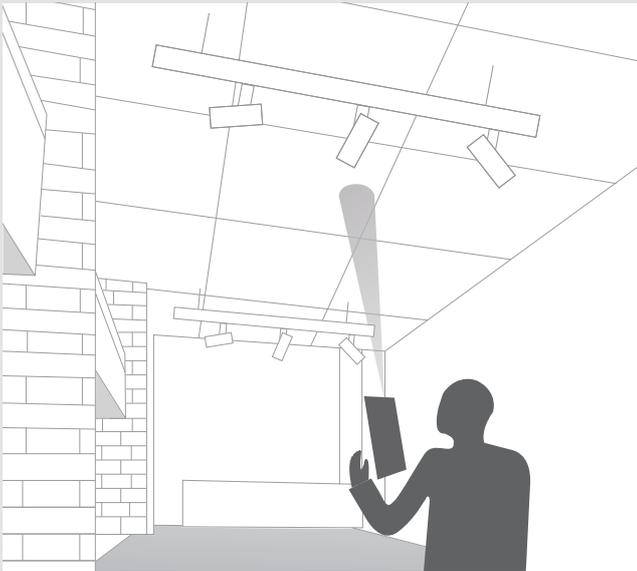


### Smart Control

Through smart devices like tablets or mobile phones to rapidly group and configure the light fixtures to work with other control devices like sensors, scene panels or remotes, and the daily lighting can be automatically controlled by schedules, occupancy, and daylight sensors, meantime manual override function satisfies users with any dimming、beam angles control and fixture swing directions when they need.

### 智能控制

透過平板電腦或手機等的智能隨身設備，快速將燈具分組並與其他控制設備進行配置(如感測器、場景面板或遙控器)。透過這些設備可設置日常行程來自動控制照明場景。同時具有手動功能在必要時可以自由調整燈光、光束角度及燈具搖擺方向來滿足用戶的需求。

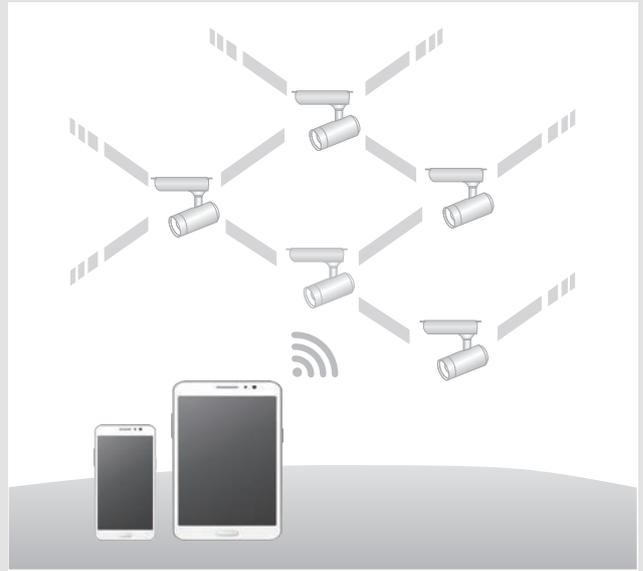


### Mesh Network for connected Lighting

Easy mesh network setup and self-healing features help users to focus on lighting applications for scenes, scheduling and daylight harvesting ,etc. Using gateways for large scale deployment or gateway-free for small applications gives users a flexible option to meet their needs.


### 智慧聯網照明系統

簡便的網狀網路設置和自我修復功能可幫助用戶專注於場景安排和恆亮控制等照明應用。使用網關進行大場景的配置，藍芽系統則適用於小區域的應用。提供靈活的方案選擇，同時滿足不同場景的需求。

12°, 2700K, 50%

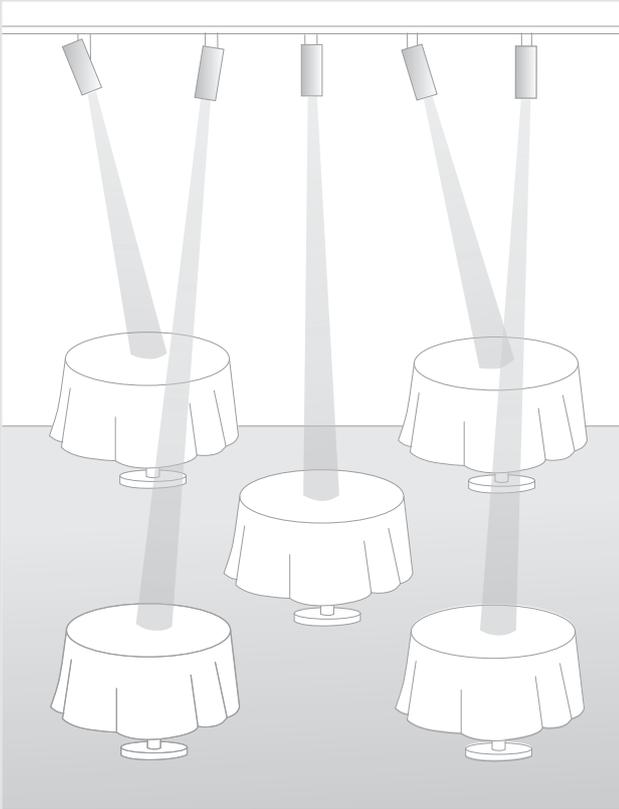

12°, 2700K, 50%

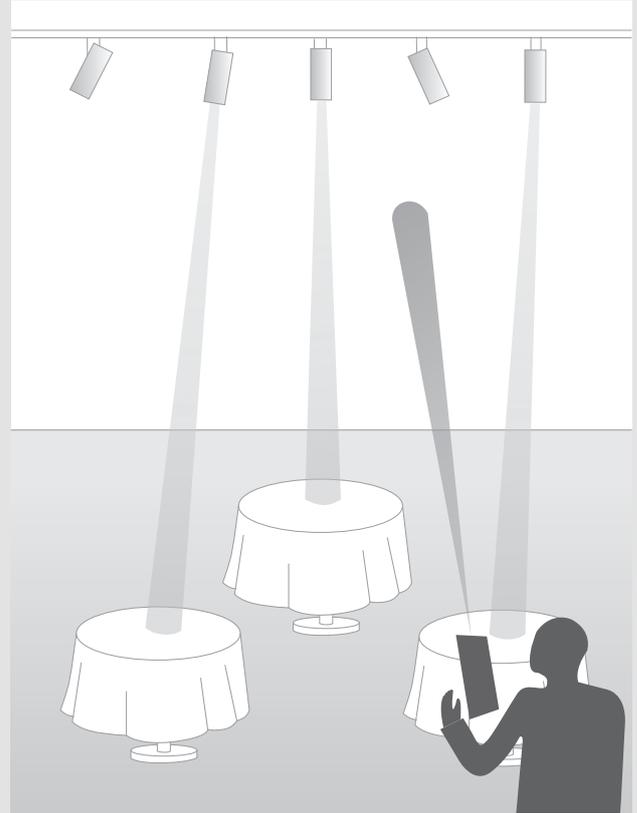

### Control the lighting angle at your fingertips

The motorized Robo Trac Series brings the ultimate flexibility to the architectural and technical lighting. The sophisticated design of RoboTrac Series discreetly incorporates advanced engineered motors and wireless technology, by using a customized app to select an individual/group of fixtures or a customized scene. dim up or dim down and drive tilt movements up to 90° and horizontal movements up to 355°. It provides highly versatile control experiences and makes light effect and efficient.

### 彈指之間

Robo Trac 電動軌道燈系列為建築和技術照明帶來了極大的靈活性。RoboTrac系列的精巧設計謹慎地結合了先進的電機和無線技術，使用者可從APP介面選擇單盞/一組燈具或自行設定場景。調亮或調暗，旋轉角度最大可達90°，水平旋轉可達355°。Robo Trac提供高效率的照明方案，同時提供使用者多元的照明體驗。

# Downlight

77-80  
Verta Series



81-82  
Luka Series



83-84  
Aria Series



85-88  
Oggi Series



89-92  
Forbes Series



93-94  
Prime Series



95-98  
Reynado Series



99-100  
Mondo Series



101-104  
Apollo Series



105-108  
Tango Series



109-112  
Timo Series



113-116  
Visi Series



117-120  
Helium Series



121-122  
Plat Series



123-128  
Ami Series



129-132  
Clone Series



133-138  
Boite Series



139-144  
Modus Series



145-148  
Brio Series



149-150  
Matrix Series



151-154  
RoboCan Series



155-158  
RoboRadar Series



# Downlight



D15-5

D15-6

D15-7

D15-3

D15-2

D15-1

Featuring a unique radiator design for elegant aesthetics, highlighted by distinctive ridges that accentuate its exceptional qualities.

獨特的散熱器設計呈現優雅美學，特殊的筋位凸顯其獨特之處。

# Verta



# Verta Series

Input Voltage 輸入電壓 100-240Vac 50/60Hz



Non-dim



0-10V



DALI




Triac



Aco Smart

Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
D15-1	8W	2700K/3000K/4000K/Tunable	15°/24°/36°	760lm	≥90
D15-2	18W	2700K/3000K/4000K/Tunable	15°/24°/36°	1650lm	≥90
D15-3	28W	2700K/3000K/4000K/Tunable	15°/24°/36°	2200lm	≥90
D15-4	36W	2700K/3000K/4000K/Tunable	15°/24°/36°	2700lm	≥90

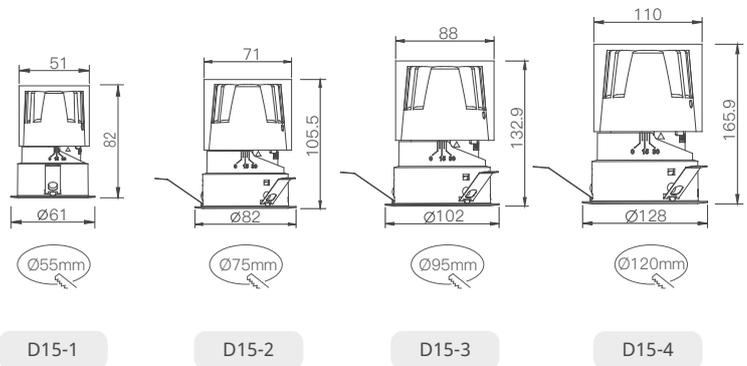

**Note:**

The lumen measured at the system 3000K.


Technical information may change, please refer to the datasheet.

以上流明測量值以3000K為測量數據。

詳細技術信息，請參閱規格書。



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
D15-5	8W	2700K/3000K/4000K/Tunable	15°/24°/36°	760lm	≥90
D15-6	18W	2700K/3000K/4000K/Tunable	15°/24°/36°	1650lm	≥90
D15-7	28W	2700K/3000K/4000K/Tunable	15°/24°/36°	2200lm	≥90
D15-8	36W	2700K/3000K/4000K/Tunable	15°/24°/36°	2700lm	≥90

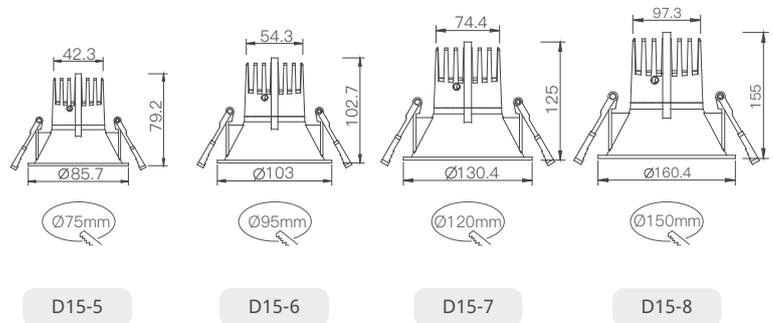

○ ● 白+灰/White+Grey

Continuing the tradition of MR16 dimensions, this series exudes a sleek, classic style. With diverse front frame options, it easily adapts to various lighting needs in different spaces.

沿襲傳統 MR16 尺寸，呈現簡約經典風格，提供多樣的前框選擇，輕鬆適應不同場域和業主的燈光需求。



D125-1

D125-5

D125-4

D125-7

D125-2

D125-8

D125-3

D125-6

B15

B19

B9

Luka

# Luka Series




Input Voltage 輸入電壓 100-240Vac 50/60Hz




Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
B9	10W	2700K/3000K/4000K/Tunable	15°/24°/36°	700lm	≥90
B15	12W	2700K/3000K/4000K/Tunable	15°/24°/36°	950lm	≥90
B19	10W	2700K/3000K/4000K/Tunable	15°/24°/36°	890lm	≥90



簡易安裝  
Easy assembly

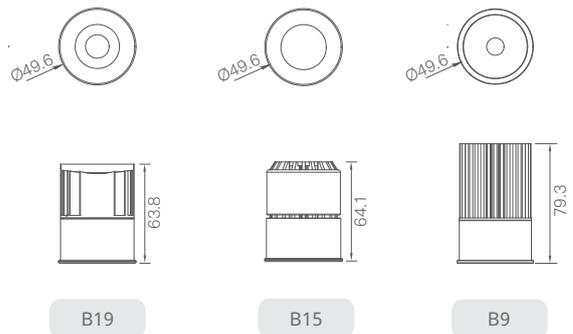

## Recessed trim 嵌入式前框

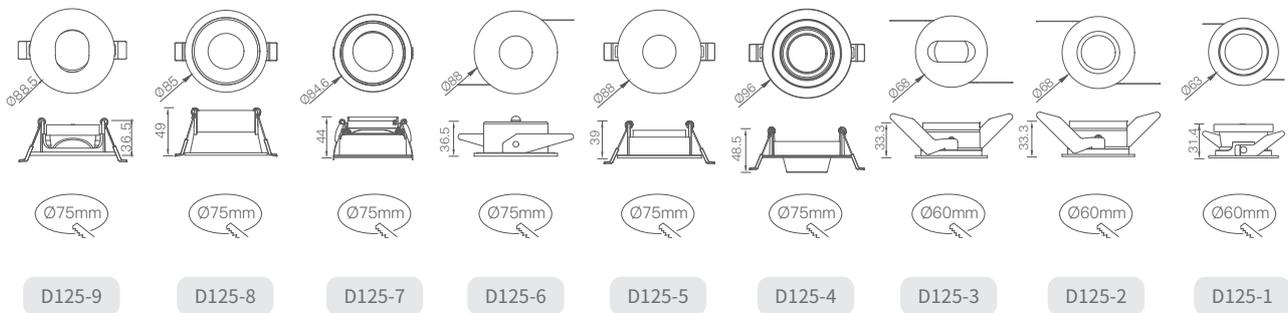

Note:

The lumen measured at the system 3000K.

Technical information may change, please refer to the datasheet.

以上流明測量值以3000K為測量數據。

詳細技術信息，請參閱規格書。

○ White 白

● Black 黑

# Aria



Representing exceptional beam clarity with a sharp cut-off line and no stray light, this series also features motion sensor functionality, meeting diverse needs for home lighting.

卓越光斑的代表，截止線清晰無雜光，同時支援感應功能，滿足居家多功能需求。


# Aria Series



Input Voltage 輸入電壓 100-240Vac 50/60Hz



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
D120-1	7W	2700K/3000K/4000K/Tunable	15°/24°/36°	380lm	≥90
D120-2	10W	2700K/3000K/4000K/Tunable	15°/24°/36°	530lm	≥90
D120-3	20W	2700K/3000K/4000K/Tunable	15°/24°/36°	1550lm	≥90
D120-4	Sensor 10W	2700K/3000K/4000K	24°	600lm	≥90

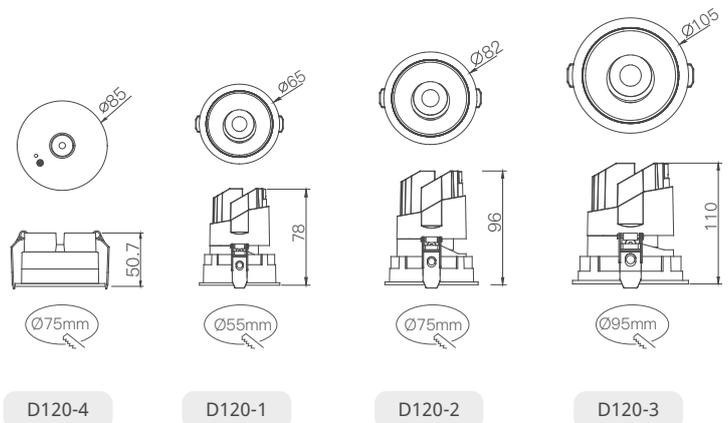

**Note:**

The lumen measured at the system 3000K.  
 Technical information may change, please refer to the datasheet.  
 以上流明測量值以3000K為測量數據。  
 詳細技術信息，請參閱規格書。

White & Silver Grey 白+銀灰色

Oggi

D36-4




D36-3




D36-2



D36-1

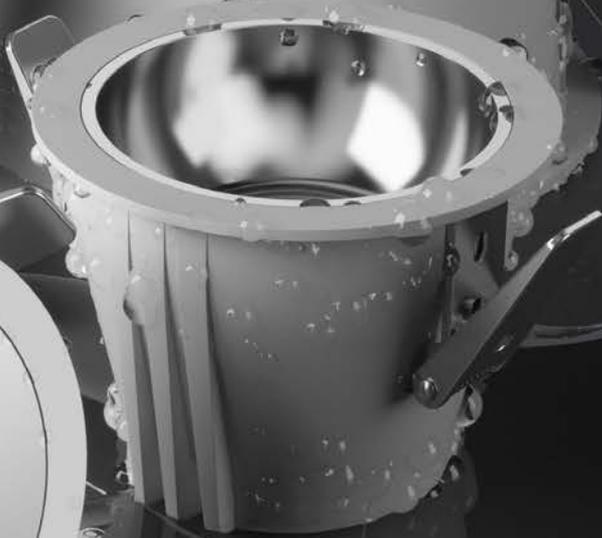

D36

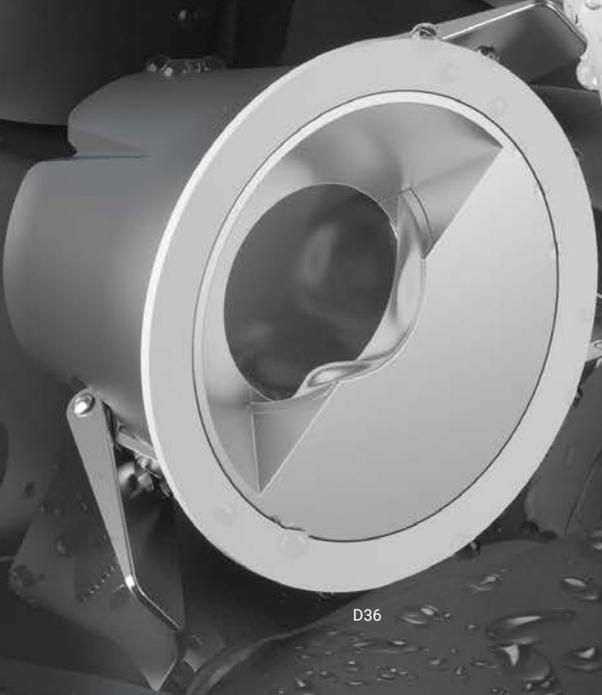



## IP54

Anti-glare black light lens and waterproof design  
黑光防眩透鏡及防水設計



# Oggi Series




Input Voltage 輸入電壓 100-240Vac 50/60Hz



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
D36 *	10W	2700K/3000K/4000K/Tunable	Asymmetric wallwash 偏光洗牆	510lm	≥90
D36-1	10W	2700K/3000K/4000K/Tunable	20°/40°	750lm	≥90
D36-2	15W	2700K/3000K/4000K/Tunable	20°/40°	1200lm	≥90
D36-3	25W	2700K/3000K/4000K/Tunable	20°/40°	1500lm	≥90
D36-4	35W	2700K/3000K/4000K/Tunable	20°/40°	2200lm	≥90
D36-5 *	15W	2700K/3000K/4000K/Tunable	Asymmetric wallwash 偏光洗牆	840lm	≥90

Note:

\*The waterproof level is IP20  
帶\*型號防水等級為IP20

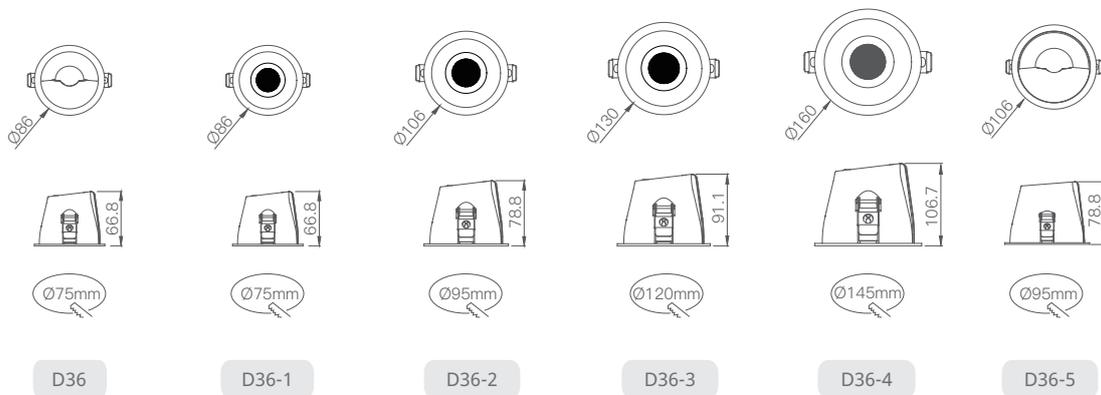

Note:

The lumen measured at the system 3000K.  
Technical information may change, please refer to the datasheet.  
以上流明測量值以3000K為測量數據。  
詳細技術信息，請參閱規格書。

○ White 白      ○● 白+灰/White+Grey



Forbes



After many tests and improvements, we optimized an anti-glare black light optical structure, so that the fixture can have a decent light distribution and deliver an ample output lumen. The sophisticated optical structure satisfied a good lighting demand and creates an anti-glare effect.

經過多次試驗與改進，最終研發了優秀的極致黑光防眩光學結構，使燈具亮度足夠的同時並實現完美的光分佈。特殊的透鏡結構營造了好的燈光氛圍和驚人的防眩效果




# Forbes Series



Input Voltage 輸入電壓 100-240Vac 50/60Hz




Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
D113	8W	2700K/3000K/4000K/Tunable	Asymmetric wallwash 偏光洗牆	450lm	≥90
D113-1	8W	2700K/3000K/4000K/Tunable	15°/24°/30°	620lm	≥90
D113-2	12W	2700K/3000K/4000K/Tunable	15°/24°/30°	850lm	≥90

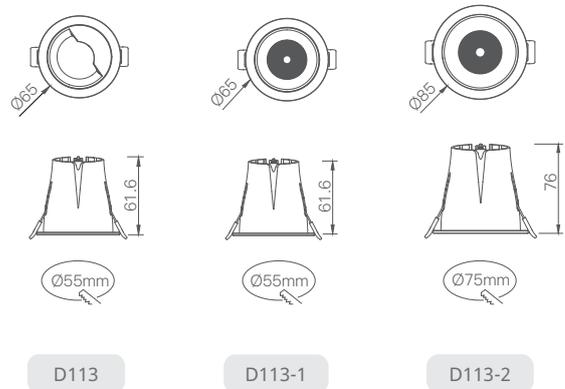

**Note:**

The lumen measured at the system 3000K.  
 Technical information may change, please refer to the datasheet.  
 以上流明測量值以3000K為測量數據。  
 詳細技術信息，請參閱規格書。



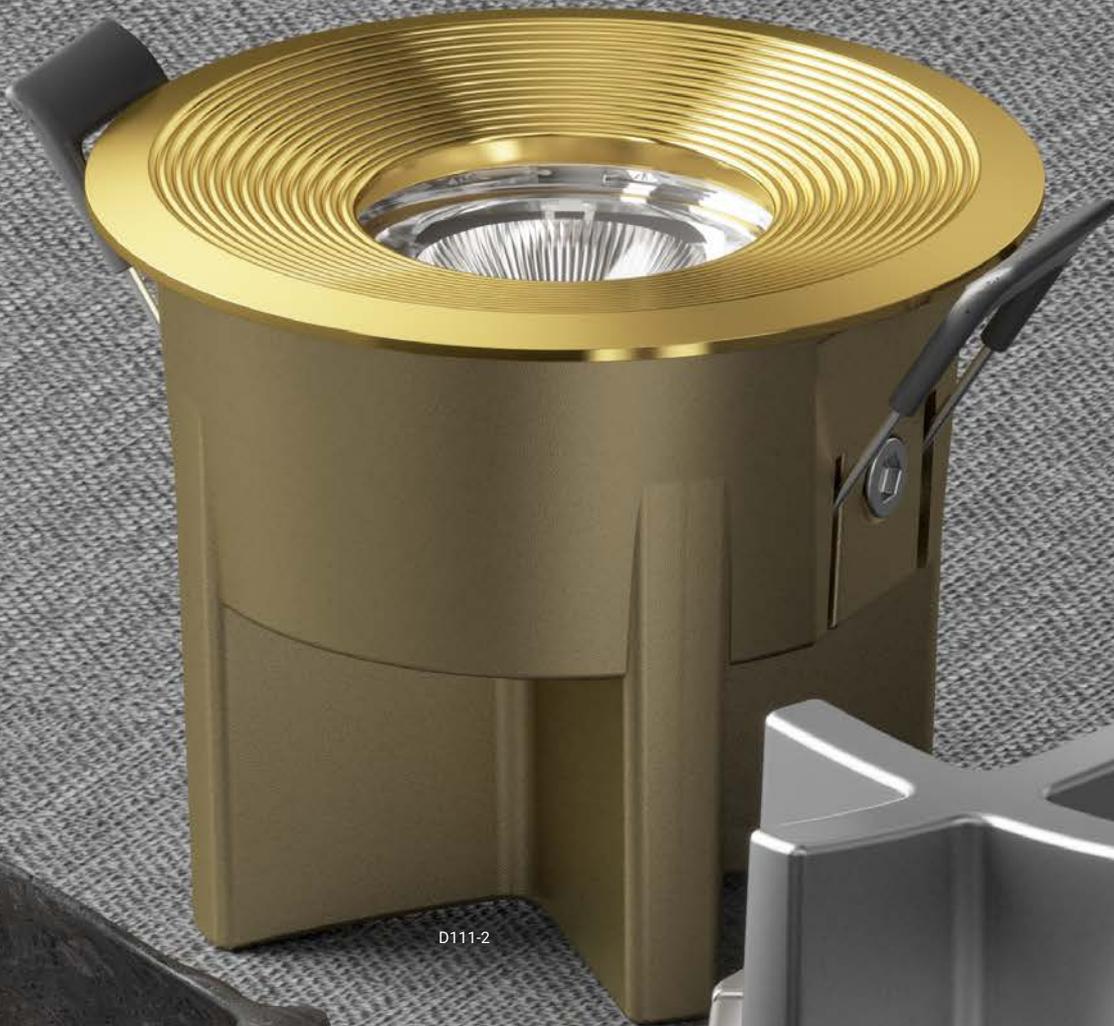

D111-2

This series highlights a unique decagram design with a sturdy iron front and an option for a luxurious copper finish, combining durability with elegance.

以獨特的十字符號設計為獨白，前端選用堅固的鐵材質，更添奢華風采，並提供極具品味的銅材質選擇。



D111-1



D111

# Prime


# Prime Series



Input Voltage 輸入電壓 100-240Vac 50/60Hz



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
D111	5W	2700K/3000K/4000K/Tunable	24°/36°	300lm	≥90
D111-1	8W	2700K/3000K/4000K/Tunable	24°/30°	800lm	≥90
D111-2	12W	2700K/3000K/4000K/Tunable	20°/30°	970lm	≥90

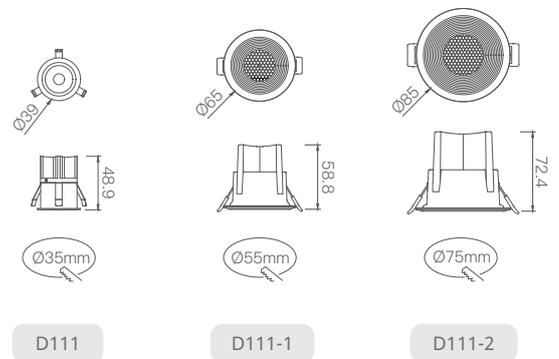

**Note:**

The lumen measured at the system 3000K.  
 Technical information may change, please refer to the datasheet.  
 以上流明測量值以3000K為測量數據。  
 詳細技術信息，請參閱規格書。





D112-2

D112-1

D112

# Reynado



### Light Engine 光引擎

The integrated module is adopted to meet the heat dissipation requirements and achieve the function of rapid assembly .

獨特的光引擎採用一體化模塊，達到散熱需求的同時做到快速拆卸功能

### Rotating structure 調角中樞集合

The lamp can achieve the maximum tilt and rotate angle ,satisfied more applications.

燈具最大的調角旋轉角度設計，以應對更多的場合所需

### Front trim 前框

High-quality materials and painting, make the fixture more upscale.

使用高品質的材料與烤漆工藝，讓燈具更有質感



Square key hole  
方形鑰匙孔



Square hole  
方形方孔



Square round hole  
方形圓孔



Round key hole  
圓形鑰匙孔



Round square hole  
圓形方孔



Round hole  
圓形圓孔

The front trim can be changed rapidly without tools. The different shape of the front trims make the fixture more flexible to immerse in various applications.

不須工具即可隨意更換前環，並通過前環上的磁鐵與燈具結合，使燈具可融入各種應用環境


# Reynado Series



Input Voltage 輸入電壓 100-240Vac 50/60Hz



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
D112	5W	2700K/3000K/4000K/Tunable	24°/36°	290lm	≥90
D112-1	7W	2700K/3000K/4000K/Tunable	24°/36°	470lm	≥90
D112-2	10W	2700K/3000K/4000K/Tunable	24°/36°	690lm	≥90

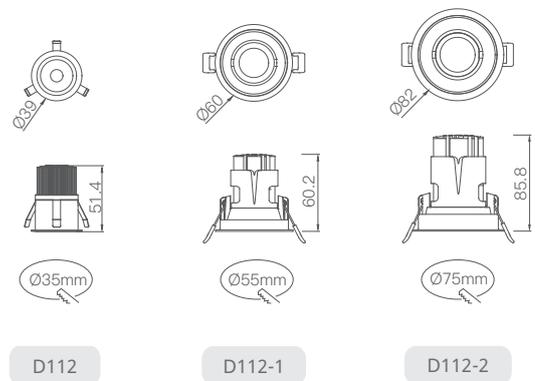

**Note:**

The lumen measured at the system 3000K.  
 Technical information may change, please refer to the datasheet.  
 以上流明測量值以3000K為測量數據。  
 詳細技術信息，請參閱規格書。



With its outstanding wall-washing effect, this light stands out by brilliantly illuminating entire walls, setting a new standard in wall-washing excellence.

以其卓越的洗牆效果脫穎而出，能夠極致照亮整面牆

D51

D50

# Mondo


# Mondo Series



Input Voltage 輸入電壓 100-240Vac 50/60Hz



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
D50	15W	2700K/3000K/4000K/Tunable	Asymmetric wallwash 偏光洗牆	1420lm	≥90
D51	15W	2700K/3000K/4000K/Tunable	Asymmetric wallwash 偏光洗牆	1420lm	≥90

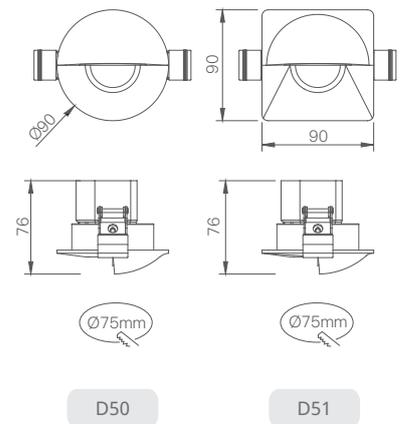

**Note:**

The lumen measured at the system 3000K.  
 Technical information may change, please refer to the datasheet.  
 以上流明測量值以3000K為測量數據。  
 詳細技術信息，請參閱規格書。


○ White 白

● Black 黑

# Apollo



D3-1

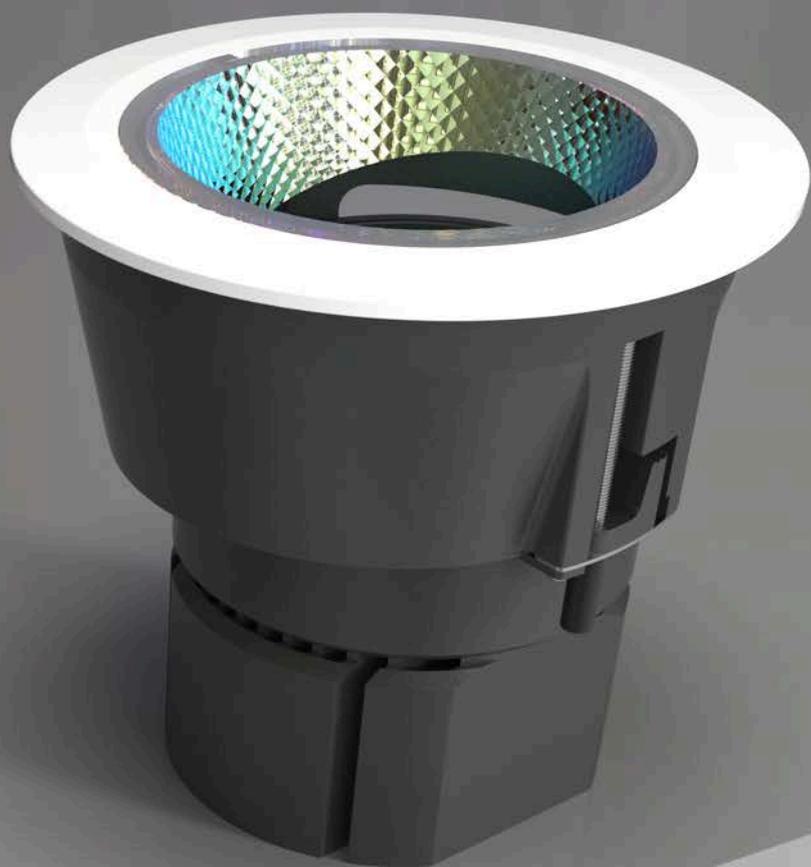

D4-1



D1-3





The Apollo family provides superior technical performance and multiple optical solutions that offers a comprehensive range of professional recessed downlight.

Apollo 系列靈活的光引擎組合提供酒店照明絕佳的方案




# Apollo Series



Input Voltage 輸入電壓 100-240Vac 50/60Hz



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
D1-3	10W	2700K/3000K/4000K/Tunable	20°/30°/40°	700lm	≥90
D3-1	24W	2700K/3000K/4000K/Tunable	18°/24°/45°	1900lm	≥90
D4-1	35W	2700K/3000K/4000K/Tunable	15°/24°/36°	2700lm	≥90

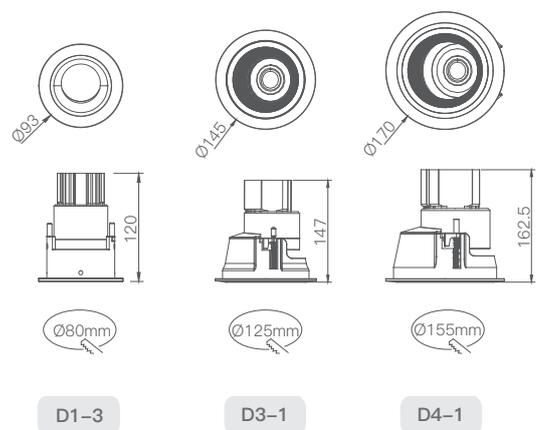

**Note:**

The lumen measured at the system 3000K.

Technical information may change, please refer to the datasheet.

以上流明測量值以3000K為測量數據。

詳細技術信息，請參閱規格書。

●○ Grey+White 青灰+白


○ White 白

● Black 黑


D52-2




D52-1-A

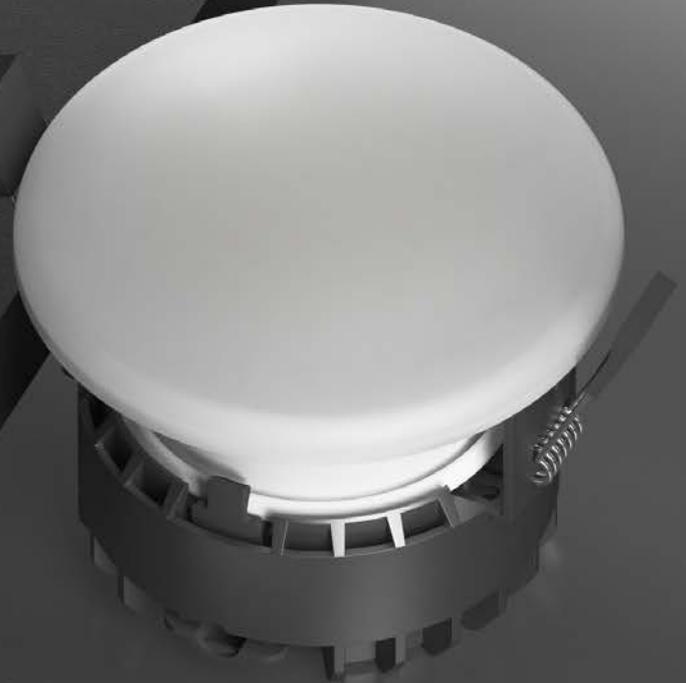

D52-1-B

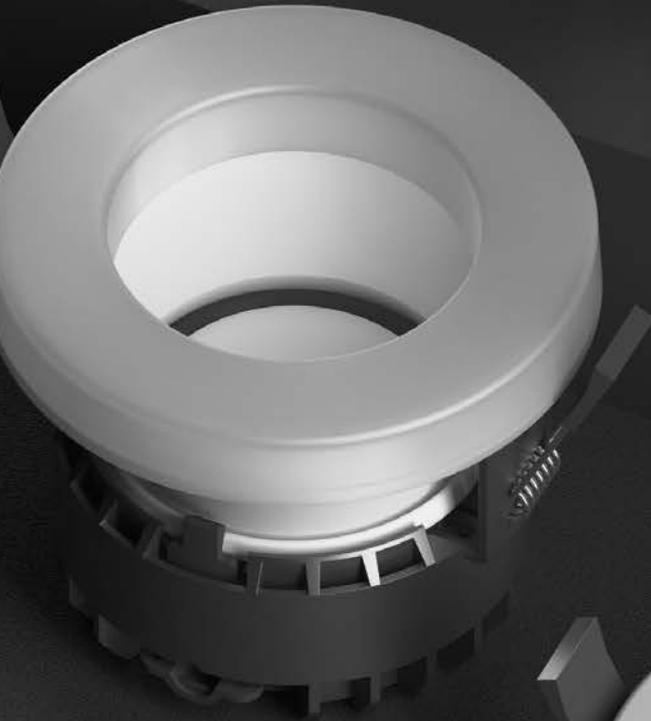

D52-1

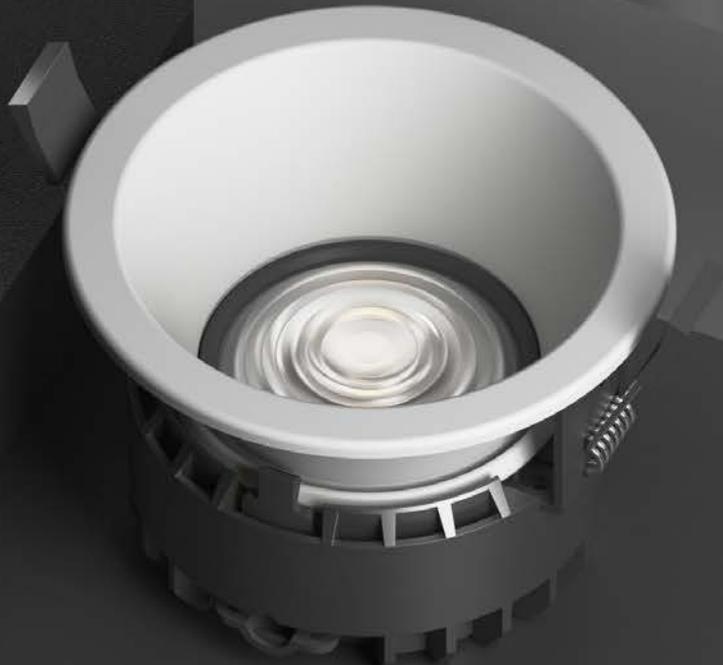

Tango



Modular design with different front trim options  
模組化前框，依據功能需求輕鬆置換



# Tango Series




Input Voltage 輸入電壓 100-240Vac 50/60Hz



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
D52-1	12W	2700K/3000K/4000K/Tunable	36°	650lm	≥90
D52-1-A	12W	2700K/3000K/4000K/Tunable	65°	570lm	≥90
D52-1-B	12W	2700K/3000K/4000K/Tunable	36°	600lm	≥90
D52-2	12W	2700K/3000K/4000K/Tunable	36°	640lm	≥90



獨特的結構設計  
Unique structure

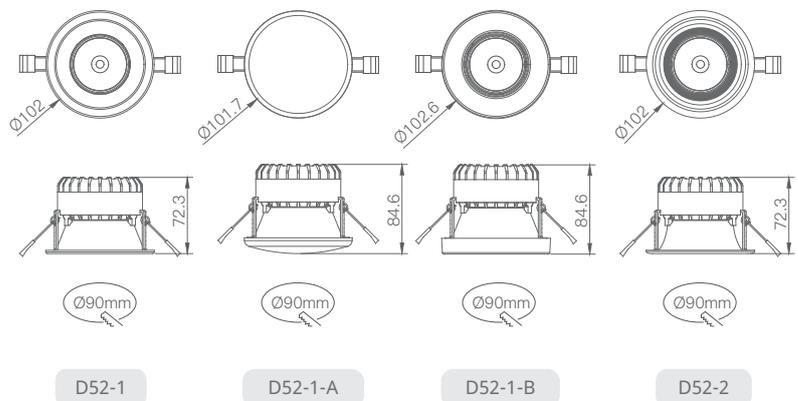

**Note:**

The lumen measured at the system 3000K.  
 Technical information may change, please refer to the datasheet.  
 以上流明測量值以3000K為測量數據。  
 詳細技術信息，請參閱規格書。

○ White 白

● Black 黑



D55-2



D55-1



D55



D68-1



D68



# Timo



D70



D70-1




Pure and versatile. Deep reflector design allows a better glare control.  
深防眩光學設計，多款反射杯可選擇

# Timo Series

Input Voltage 輸入電壓 100-240Vac 50/60Hz



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
D55	6W	2700K/3000K/4000K	40°	300lm	≥90
D55-1	10W	2700K/3000K/4000K/Tunable	24°/40°	650lm	≥90
D55-2	15W	2700K/3000K/4000K/Tunable	24°/40°	1000lm	≥90

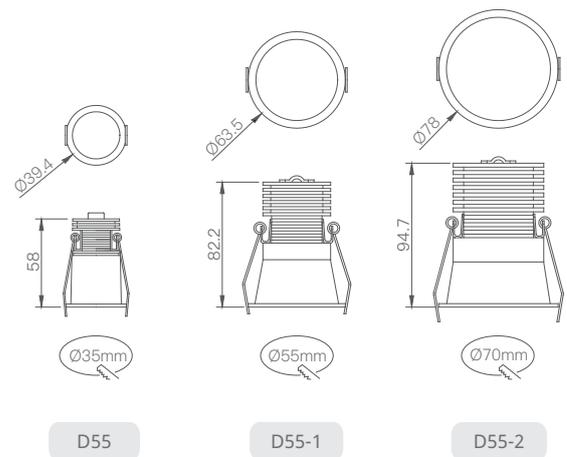


**Note:**

The lumen measured at the system 3000K.  
 Technical information may change, please refer to the datasheet.  
 以上流明測量值以3000K為測量數據。  
 詳細技術信息，請參閱規格書。



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
D68	11W	2700K/3000K/4000K/Tunable	24°/36°	950lm	≥90
D68-1	15W	2700K/3000K/4000K/Tunable	15°/36°	1000lm	≥90
D70	11W	2700K/3000K/4000K/Tunable	20°/25°/36°	800lm	≥90
D70-1	15W	2700K/3000K/4000K/Tunable	20°/30°	1200lm	≥90

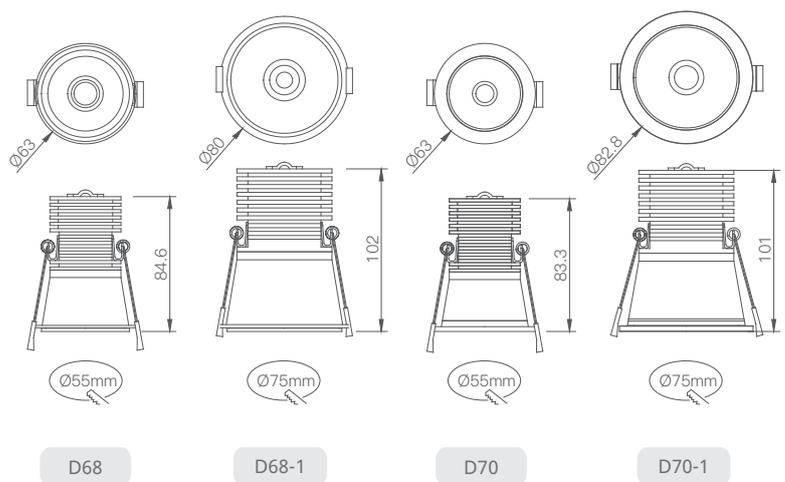

# Visi

D65-2




D65-1



D65

The lamps can be swayed to achieve the maximum illumination angle function.

燈具可搖擺，實現最大照射角度功能

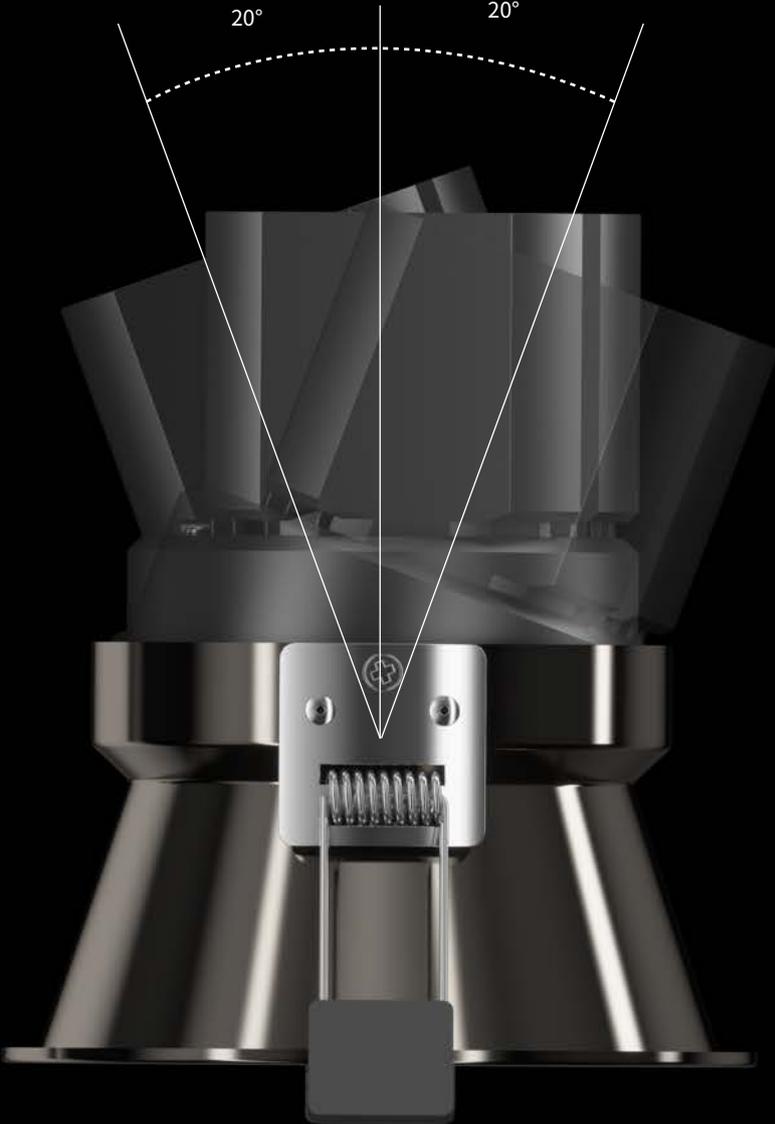




# Visi Series



Input Voltage 輸入電壓 100-240Vac 50/60Hz



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
D65	13W	2700K/3000K/4000K/Tunable	15°/24°/36°	1000lm	≥90
D65-1	24W	2700K/3000K/4000K/Tunable	20°/24°/36°	1600lm	≥90
D65-2	33W	2700K/3000K/4000K/Tunable	15°/24°/36°	3200lm	≥90

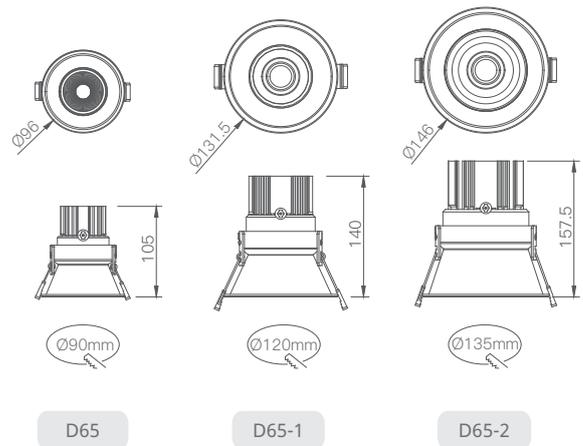

**Note:**

The lumen measured at the system 3000K.  
 Technical information may change, please refer to the datasheet.  
 以上流明測量值以3000K為測量數據。  
 詳細技術信息，請參閱規格書。


○ White 白

● Black 黑

D6-8-C




D6-6-C

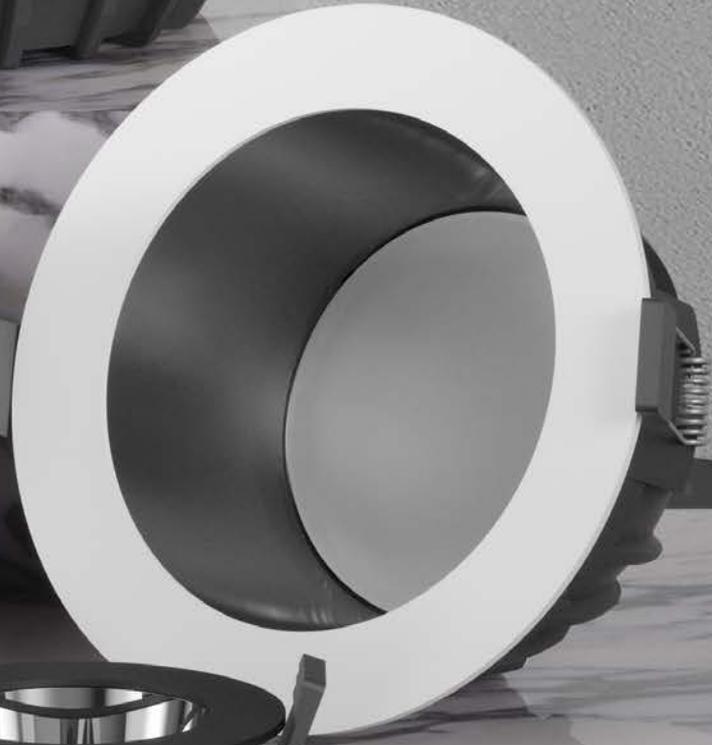

D6-5-B



D6-4-B

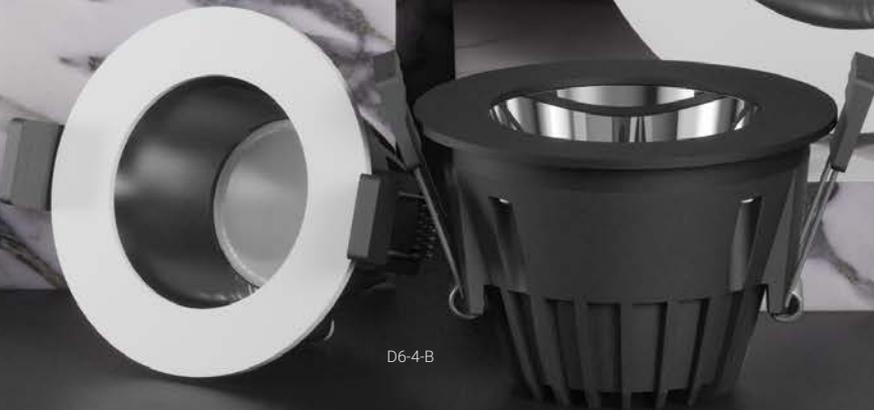

# Helium

Die-casting heatsink and glare-free design.  
良好的散熱系統及深防眩設計



# Helium Series

Input Voltage 輸入電壓 100-240Vac 50/60Hz



Non-dim



0-10V



DALI




Triac



Aco Smart

Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
D6-3-B	5W	2700K/3000K/4000K/Tunable	58°	250lm	≥90
D6-3-B-D	7W	2700K/3000K/4000K/Tunable	20°/36°	390lm	≥90
D6-4-B	8W	2700K/3000K/4000K/Tunable	65°	600lm	≥90
D6-4-B-D	11W	2700K/3000K/4000K/Tunable	15°/30°/40°	630lm	≥90

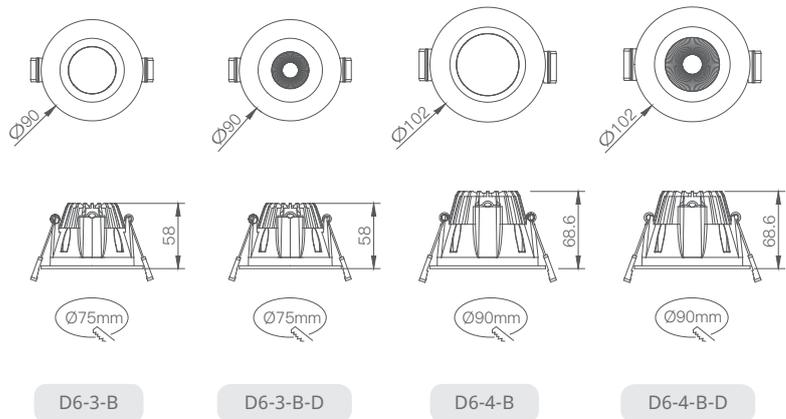

**Note:**

The lumen measured at the system 3000K.


Technical information may change, please refer to the datasheet.

以上流明測量值以3000K為測量數據。

詳細技術信息，請參閱規格書。



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
D6-5-B	12W	2700K/3000K/4000K/Tunable	60°	950lm	≥90
D6-5-B-D	15W	2700K/3000K/4000K/Tunable	18°/30°/40°	1300lm	≥90
D6-6-C	20W	2700K/3000K/4000K/Tunable	75°	1750lm	≥90
D6-8-C	28W	2700K/3000K/4000K/Tunable	70°	2550lm	≥90

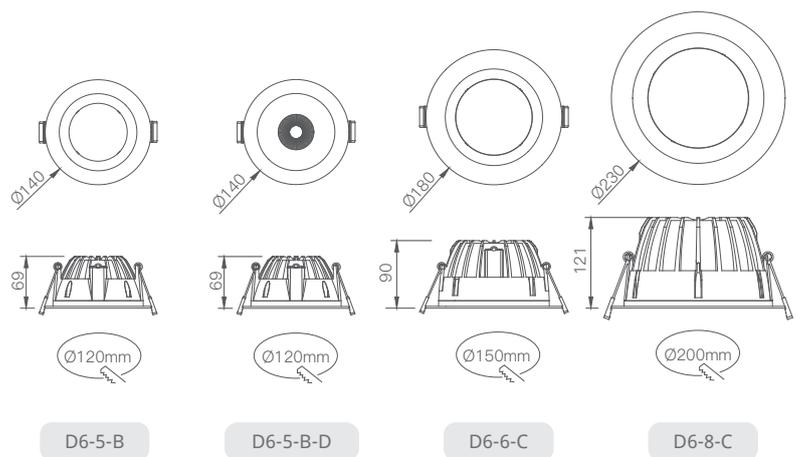


○ White 白

● Black 黑

Highlighting an ultra-thin design, this series seamlessly blends advanced foundational lighting with supreme elegance, making it versatile for various settings.

主打極致輕薄，融合高級基礎照明功能，適用多場域，兼具極致優雅與實用。

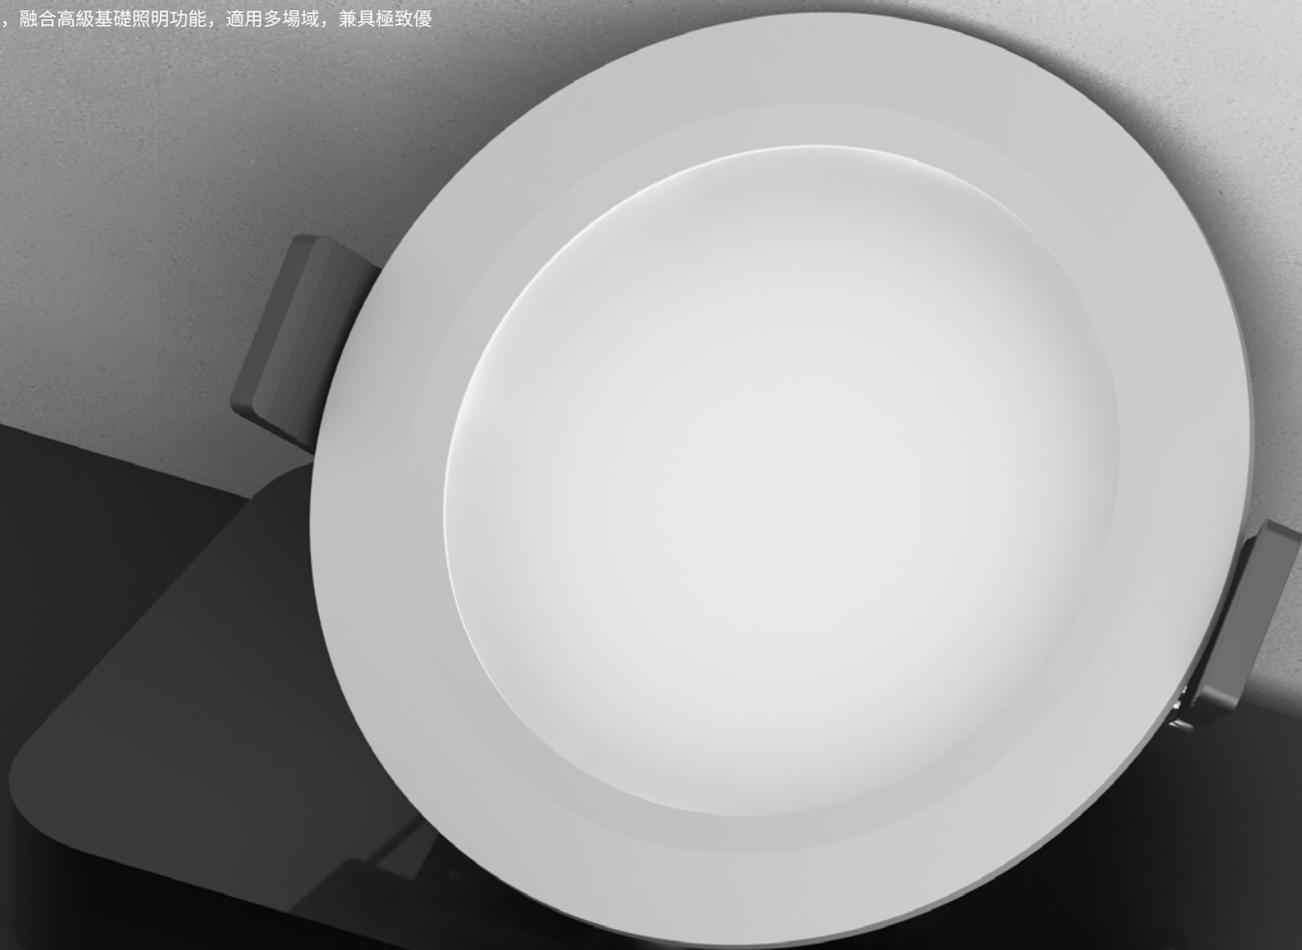

D5-3-B-E

D5-5-B-E



D5-4-B-E

# Plat


# Plat Series



Input Voltage 輸入電壓 100-240Vac 50/60Hz



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
D5-3-B-E	6W	2700K/3000K/4000K/Tunable	Flood 泛光	330lm	≥90
D5-4-B-E	9W	2700K/3000K/4000K/Tunable	Flood 泛光	580lm	≥90
D5-5-B-E	13W	2700K/3000K/4000K/Tunable	Flood 泛光	1000lm	≥90

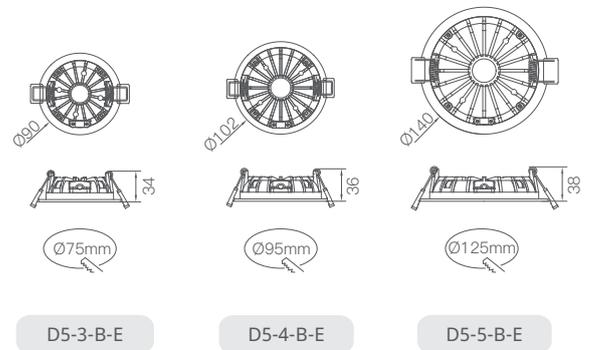

**Note:**

The lumen measured at the system 3000K.

Technical information may change, please refer to the datasheet.

以上流明測量值以3000K為測量數據。

詳細技術信息，請參閱規格書。

○ White 白


● Black 黑

Meet the AMI Recessed Lighting Series, where innovation meets diversity. Highlighted by its adjustable multi-angle filters, its standout feature is the retractable built-in design. Available in circular and square shapes with single, double, and triple lamp configurations, these fixtures allow users to easily adjust the lighting position, offering unmatched flexibility in illumination control.


AMI 嵌燈系列，矚目的可調多角度濾片，獨特之處在於可伸縮式嵌入設計。提供圓形和方形、單、雙、三燈選擇，讓用戶輕鬆調整燈具位置，實現極大的光線自主性。



Ami



Magnetic filter  
磁吸式濾片







# Ami Series

Input Voltage 輸入電壓 100-240Vac 50/60Hz



Non-dim



0-10V



DALI




Triac



Aco Smart

Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
D41-1-A 	10W	2700K/3000K/4000K/Tunable	18°-45°	370lm	≥90
D41-2-A 	10W*2	2700K/3000K/4000K/Tunable	18°-45°	370lm*2	≥90
D41-3-A 	10W*3	2700K/3000K/4000K/Tunable	18°-45°	370lm*3	≥90
D41-4-A 	10W	2700K/3000K/4000K/Tunable	18°-45°	370lm	≥90

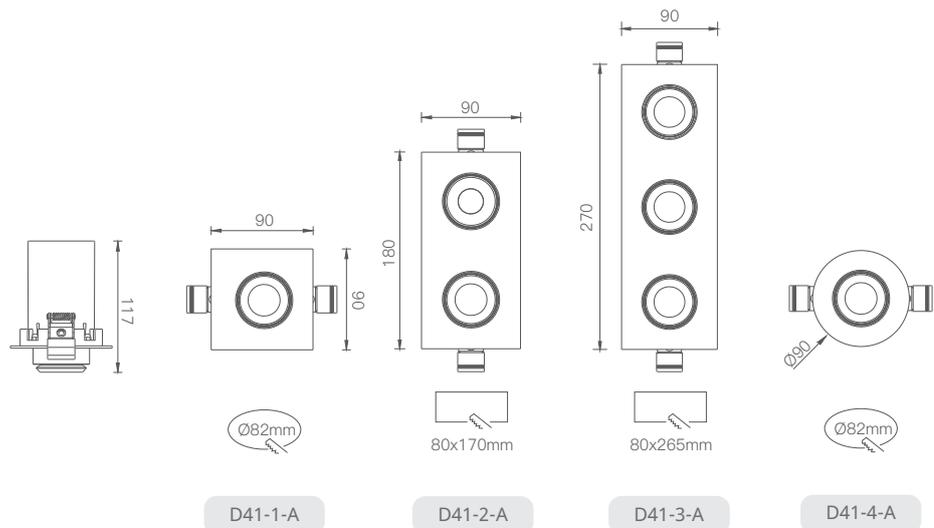

**Note:**

The lumen measured at the system 3000K.

Technical information may change, please refer to the datasheet.

以上流明測量值以3000K為測量數據。

詳細技術信息，請參閱規格書。



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
D41-1-B	10W	2700K/3000K/4000K*	10°+Magnetic filter 10°+磁吸濾片	440lm	≥90
D41-2-B	10W*2	2700K/3000K/4000K*	10°+Magnetic filter 10°+磁吸濾片	440lm*2	≥90
D41-3-B	10W*3	2700K/3000K/4000K*	10°+Magnetic filter 10°+磁吸濾片	440lm*3	≥90
D41-4-B	10W	2700K/3000K/4000K*	10°+Magnetic filter 10°+磁吸濾片	440lm	≥90

\*Tunable version with condition, please contact us. 可改為雙色溫版本，請聯繫我們。


#### Accessories 配件

##### Magnetic filter 磁吸濾片



##### Front trim color 前環顏色

- Black 黑
- White 白
- Black Chrome 黑鉻
- Chrome 白鉻

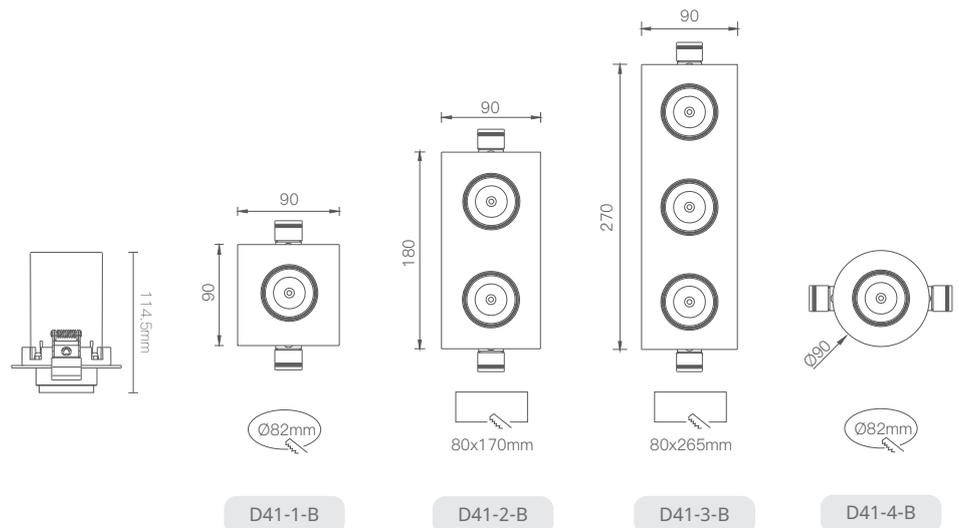

○ White 白      ● Black 黑



D11-3

D11-2

D11-7

D11-4-B

D11-4-C

D11-7-B

D11-6

D11-5

D11-5-B

Clone




# Clone Series

Input Voltage 輸入電壓 100-240Vac 50/60Hz



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
D11-1	9W	2700K/3000K/4000K/Tunable	24°/38°	670lm	≥90
D11-2	9W	2700K/3000K/4000K/Tunable	24°/38°	580lm	≥90
D11-3	9W	2700K/3000K/4000K/Tunable	24°/38°	630lm	≥90
D11-4	9W	2700K/3000K/4000K/Tunable	24°/38°	610lm	≥90
D11-4-B	9W	2700K/3000K/4000K/Tunable	24°/38°	590lm	≥90
D11-4-C	9W	2700K/3000K/4000K/Tunable	65°	500lm	≥90

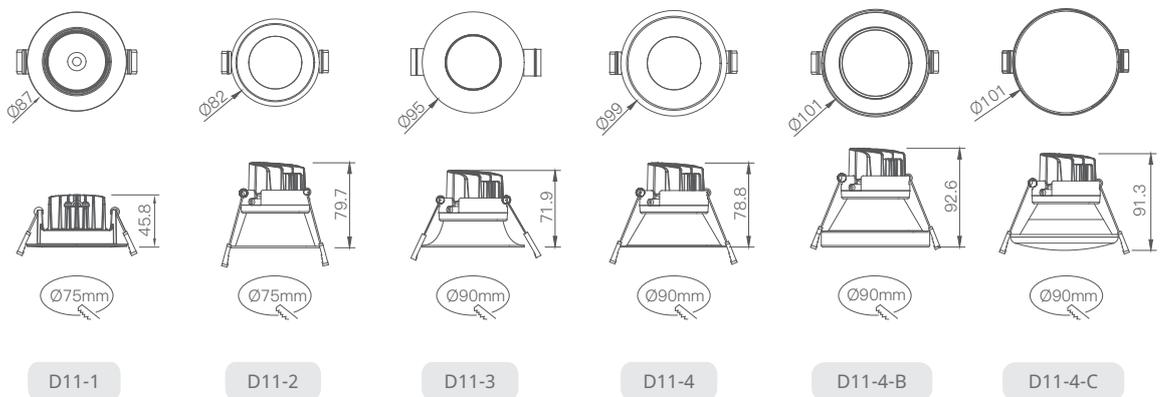


**Note:**

The lumen measured at the system 3000K.  
 Technical information may change, please refer to the datasheet.  
 以上流明測量值以3000K為測量數據。  
 詳細技術信息，請參閱規格書。




Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
D11-5	9W	2700K/3000K/4000K/Tunable	24°/38°	640lm	≥90
D11-5-B	10W	2700K/3000K/4000K/Tunable	24°/38°	650lm	≥90
D11-6	9W*2	2700K/3000K/4000K/Tunable	24°/38°	640lm*2	≥90
D11-6-B	10W*2	2700K/3000K/4000K/Tunable	24°/38°	650lm*2	≥90
D11-7	9W*3	2700K/3000K/4000K/Tunable	24°/38°	640lm*3	≥90
D11-7-B	10W*3	2700K/3000K/4000K/Tunable	24°/38°	650lm*3	≥90

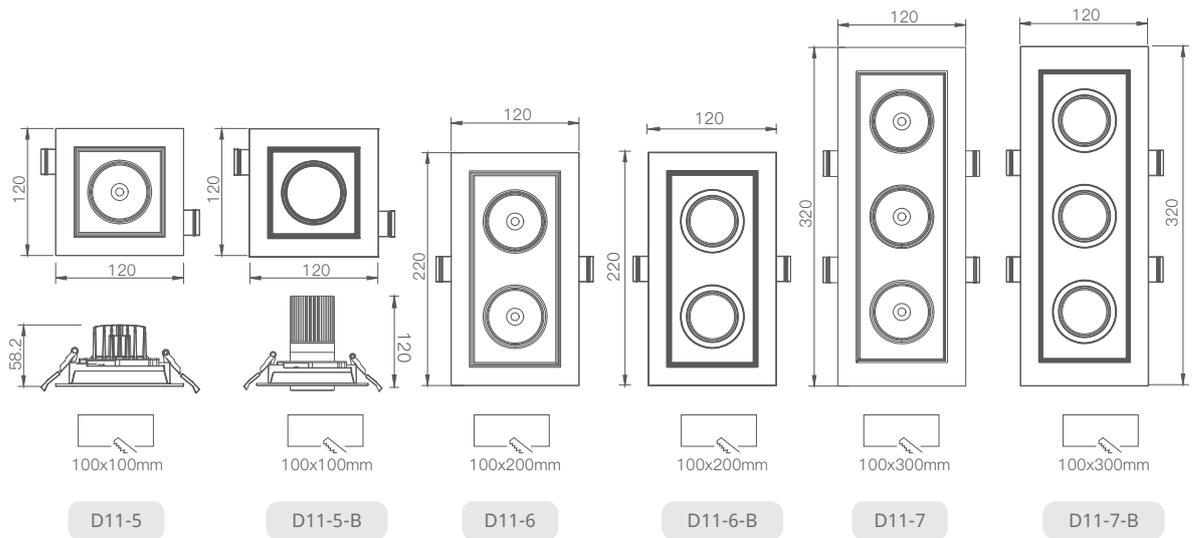


○ White 白      ● Black 黑      ● Grey 青灰




D100-3 & G & A & H

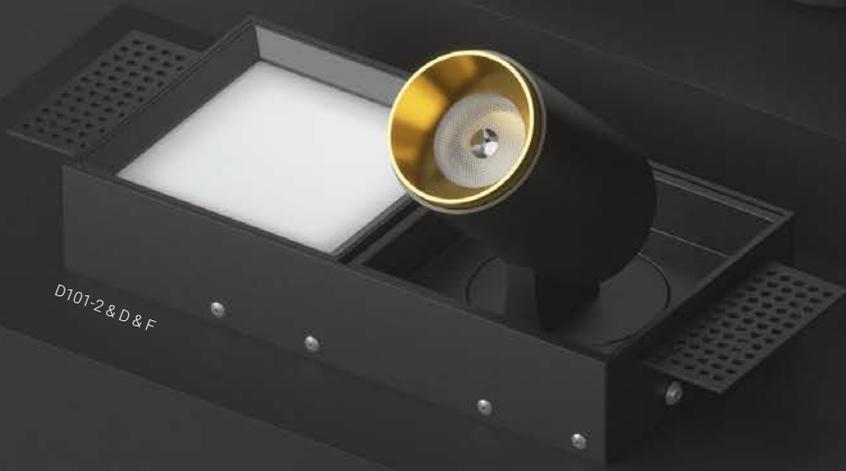

D101-2 & D & F

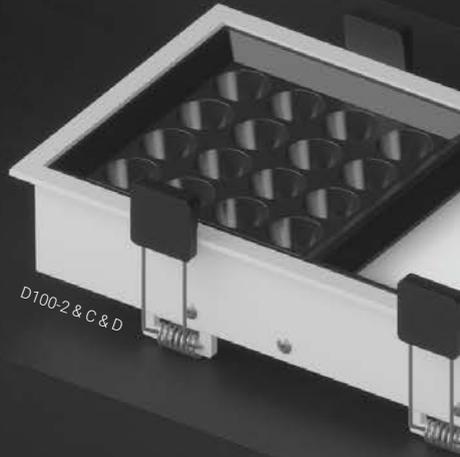

D100-2 & C & D

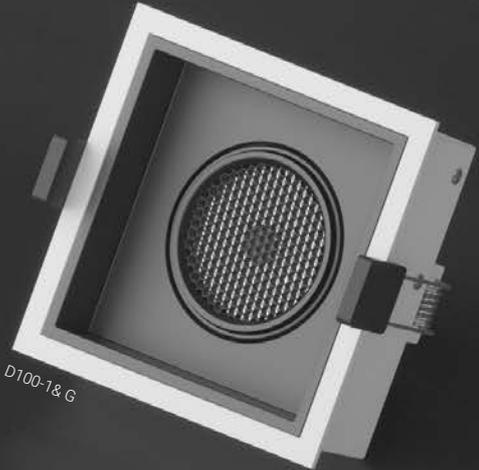

D100-1 & G



D101-1 & E




# Boite



Multiple combination, customize your own light.

快速更換不同照明模組

Recessed frame 嵌入式前框

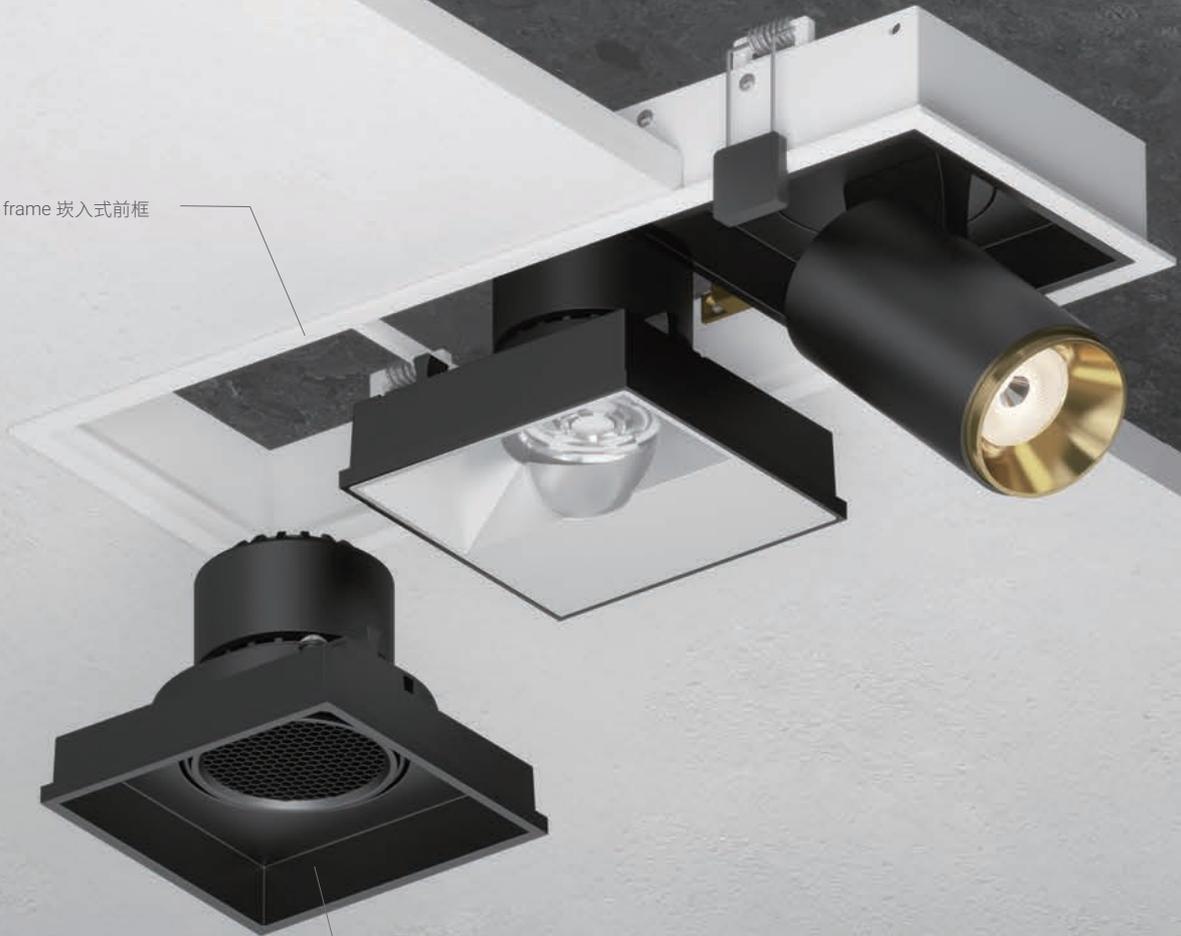

Light Module 可替換模組



D100-1

D100-2

D100-3

D101-1

D101-2

D101-3



A

B

C

D

E

F

G

H



10°

15°

20°

25°

36°



60°

10X25°

10X36°





36X36°

Honeycomb

Recessed frame 嵌入式前框

○ White 白

● Black 黑

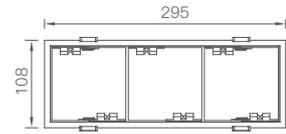

102x100mm

D100-1



102x193mm

D100-2






102x287mm

D100-3

Trimless recessed frame 嵌入式無邊框

○ White 白

● Black 黑



102x106mm

D101-1



102x199mm

D101-2



102x293mm

D101-3

# Boite Series

Input Voltage 輸入電壓 100-240Vac 50/60Hz



Non-dim



0-10V



DALI











Triac



Aco Smart

Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
A	12W	2700K/3000K/4000K/Tunable	Asymmetric wallwash 偏光洗牆	670lm	≥90
B	12W	2700K/3000K/4000K/Tunable	17°-45°	730lm	≥90
C	12W	2700K/3000K/4000K	24°	940lm	≥90
D	12W	2700K/3000K/4000K	Flood 泛光	750lm	≥90



A

B

C

D

**Note:**

The lumen measured at the system 3000K.

Technical information may change, please refer to the datasheet.

以上流明測量值以3000K為測量數據。

詳細技術信息，請參閱規格書。



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
E	7W	2700K/3000K/4000K/Tunable	15°/20°/30°	390lm	≥90
F	12W	2700K/3000K/4000K*	10°+Magnetic filter 10°+磁吸濾片	440lm	≥90
G	12W	2700K/3000K/4000K*	10°+Magnetic filter 10°+磁吸濾片	650lm	≥90
H	12W	2700K/3000K/4000K/Tunable	18°/24°/40°	880lm	≥90


\* Tunable version with condition, please contact us. 可改為雙色溫版本，請聯繫我們。

#### Accessories 配件

##### F Magnetic filter 磁吸濾片



##### G Magnetic filter 磁吸濾片

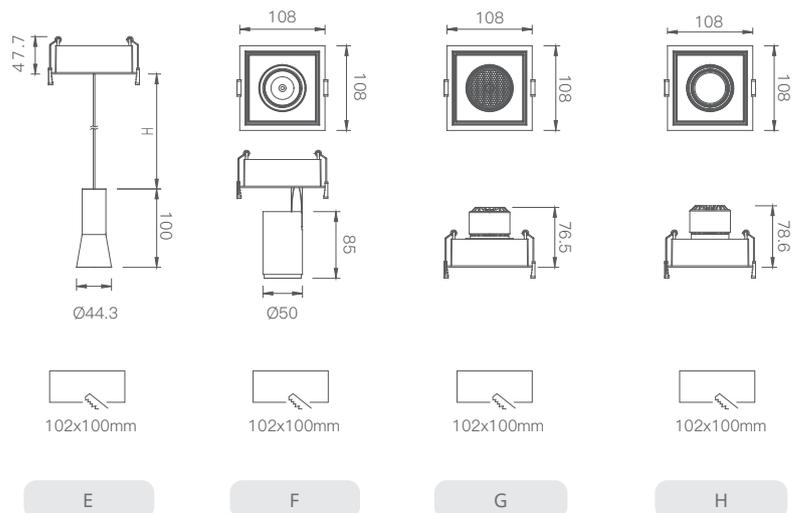

○ White 白


● Black 黑


# Modus



Meet the Modus series – a push-and-swap design with modular flexibility. Easily switch modules with a choice of borderless or framed options, offering limitless lighting possibilities.

Modus 系列，採用簡便的按壓式設計，以模組化結構融入多變性。可輕鬆按壓更換模組，提供多樣無邊框和有邊框選擇，激發更多使用可能性。


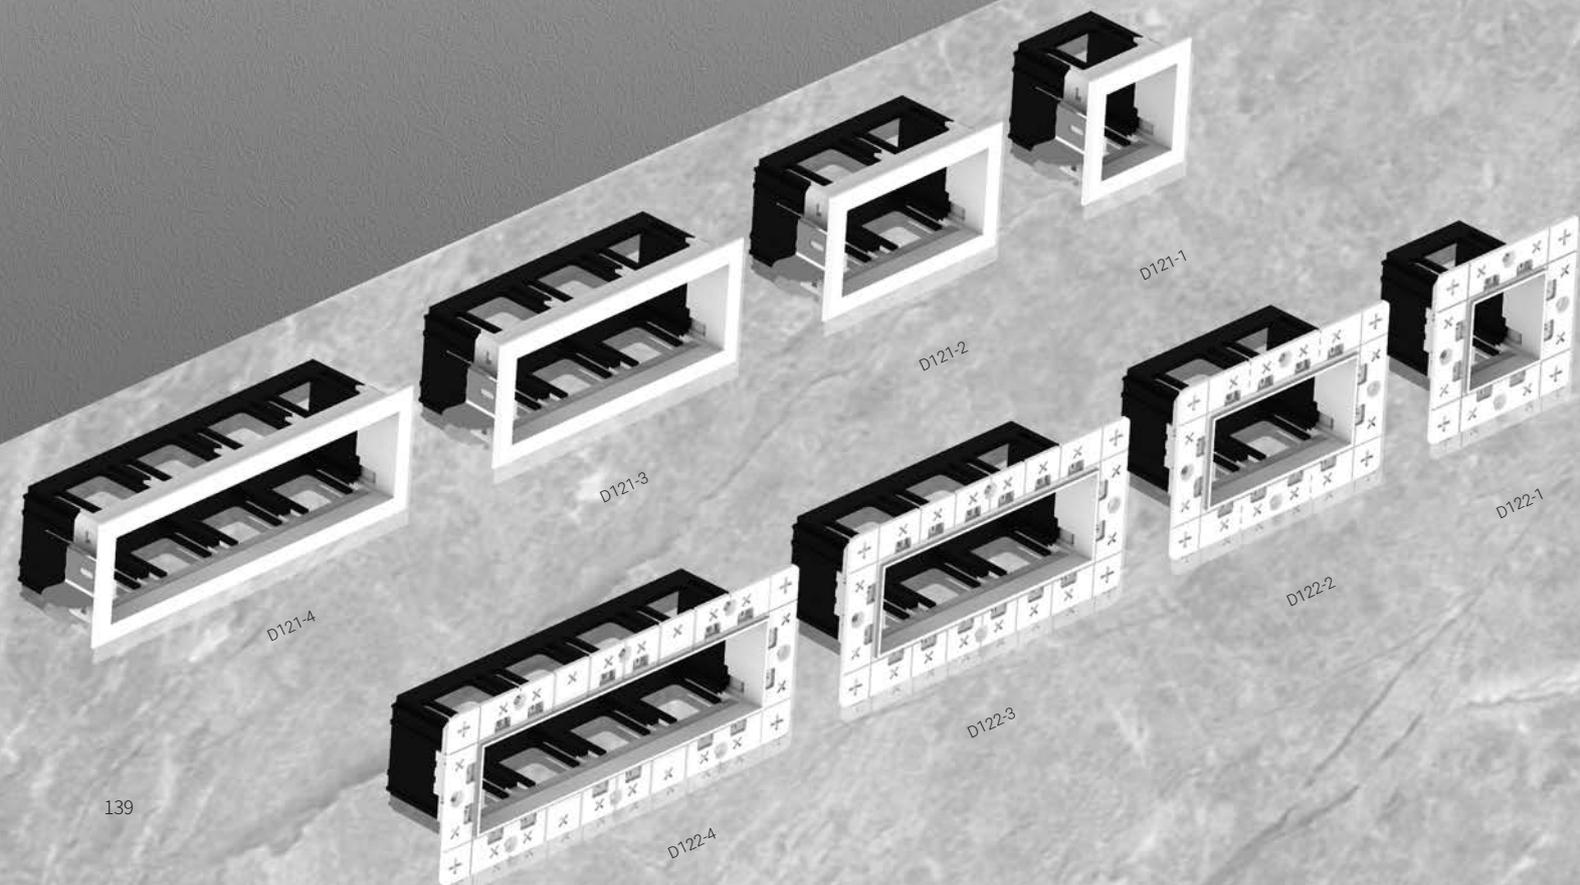


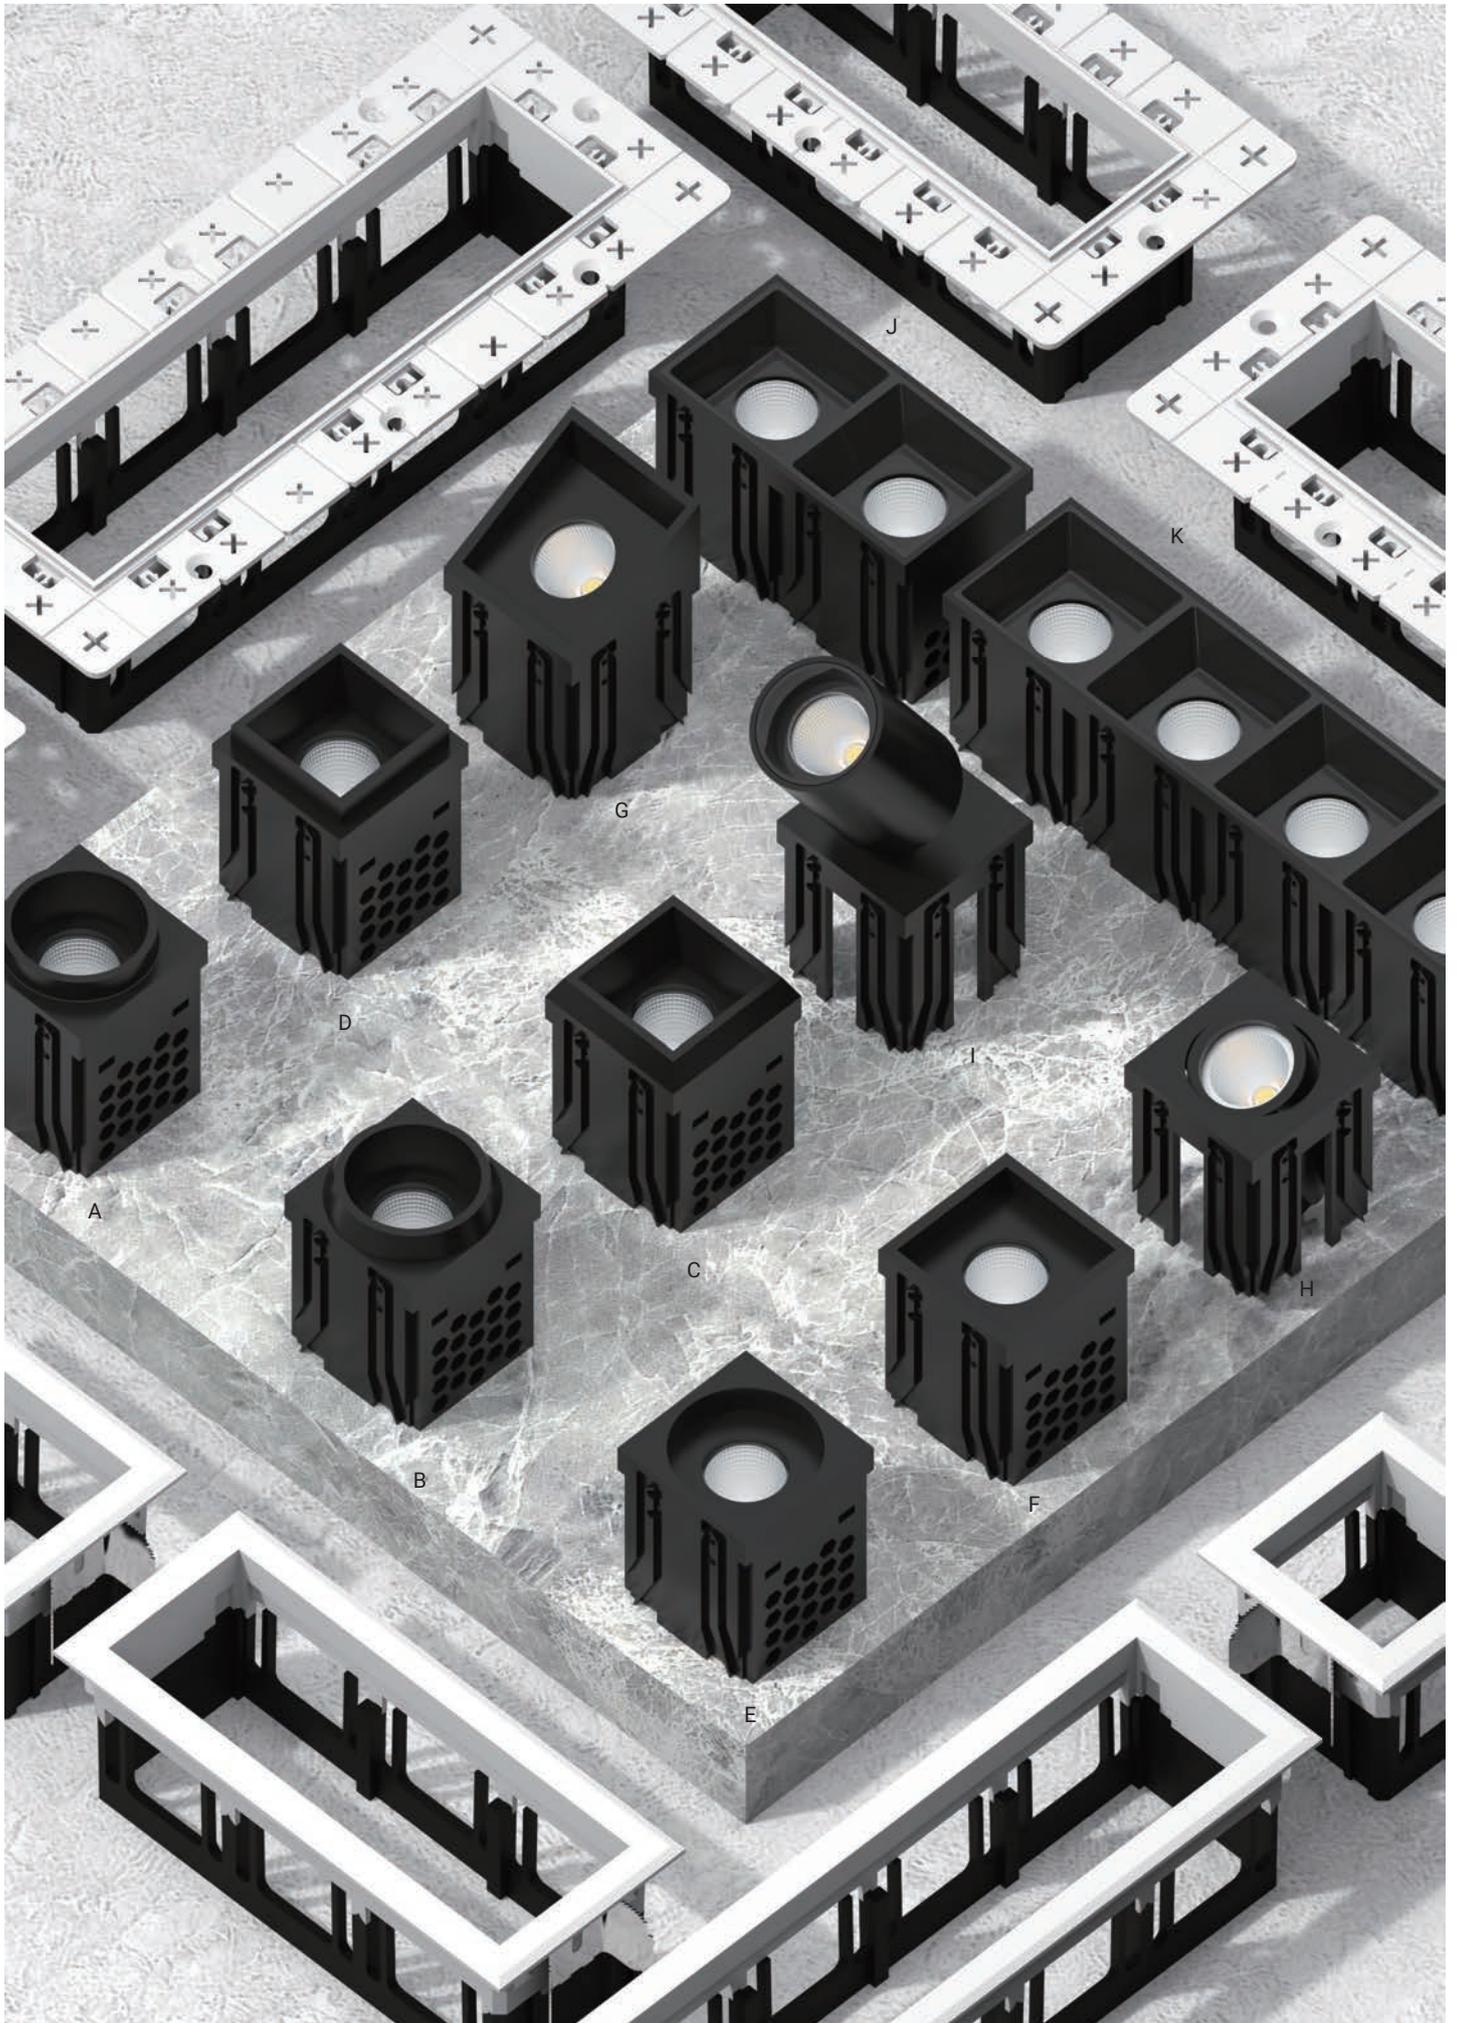

Recessed frame 嵌入式前框


○ White 白

● Black 黑



55x55mm

D121-1




100x55mm

D121-2



144x55mm

D121-3

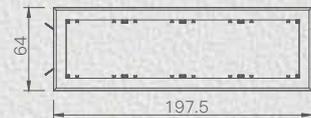



189x55mm

D121-4

Trimless recessed frame 嵌入式無邊框


○ White 白

● Black 黑




63x63mm

D122-1




110x63mm

D122-2

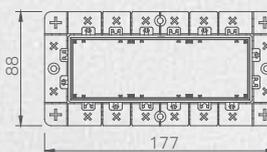

153x63mm

D122-3

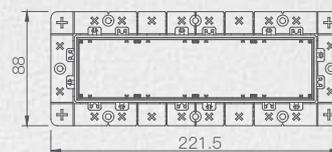

198x63mm

D122-4


# Modus Series



Input Voltage 輸入電壓 100-240Vac 50/60Hz



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
A	5W	2700K/3000K/4000K	24°/36°	320lm	≥90
B	5W	2700K/3000K/4000K	24°/36°	340lm	≥90
C	5W	2700K/3000K/4000K	24°/36°	330lm	≥90
D	5W	2700K/3000K/4000K	24°/36°	340lm	≥90

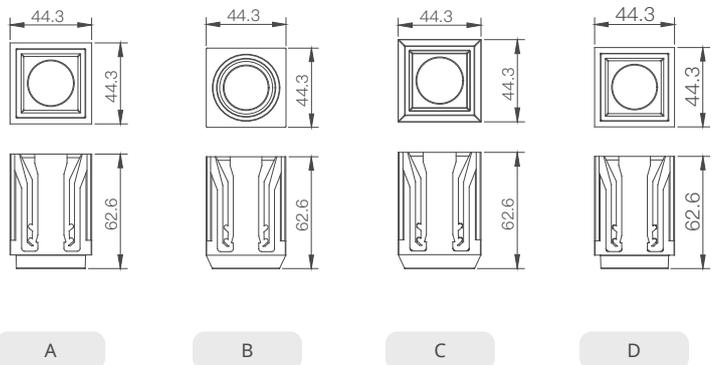

**Note:**

The lumen measured at the system 3000K.

Technical information may change, please refer to the datasheet.

以上流明測量值以3000K為測量數據。

詳細技術信息，請參閱規格書。

○ White 白

● Black 黑

# Modus Series

Input Voltage 輸入電壓 100-240Vac 50/60Hz



Non-dim



0-10V



DALI





Triac





Aco Smart



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
E	5W	2700K/3000K/4000K	24°/36°	340lm	≥90
F	5W	2700K/3000K/4000K	24°/36°	330lm	≥90
G	5W	2700K/3000K/4000K	Asymmetric wallwash 偏光洗牆	270lm	≥90
H	5W	2700K/3000K/4000K	24°/36°	380lm	≥90





E



F



G



H

**Note:**

The lumen measured at the system 3000K.


Technical information may change, please refer to the datasheet.

以上流明測量值以3000K為測量數據。

詳細技術信息，請參閱規格書。



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
I	5W	2700K/3000K/4000K	24°/36°	370lm	≥90
J	7W	2700K/3000K/4000K	28°/40°	620lm	≥90
K	14W	2700K/3000K/4000K	28°/40°	1340lm	≥90

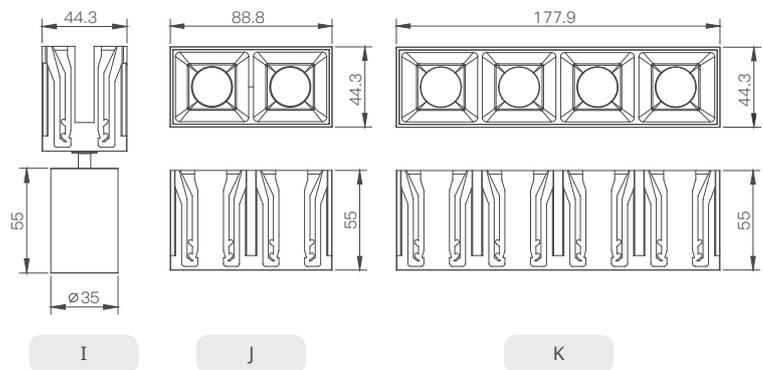

○ White 白

● Black 黑

Featuring a linear grid design, this luminaire allows adjustable frame movement for changing the illumination direction, complemented by a diverse color range in the front ring, showcasing versatility.

以線性格柵為特點，燈體可擺動改變照射位置，前環呈現多變色彩。



# Brio



# Brio Series

Input Voltage 輸入電壓 100-240Vac 50/60Hz



Non-dim



0-10V



DALI




Triac




Aco Smart

Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
D123-1	5W	2700K/3000K/4000K	24°/36°	220lm	≥90
D123-2	5W	2700K/3000K/4000K	24°/36°	230lm	≥90
D123-3	10W	2700K/3000K/4000K	24°/36°	760lm	≥90




65x27mm

D123-1

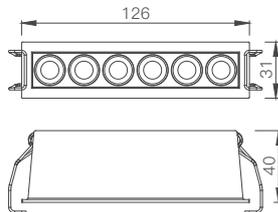

122x27mm

D123-3

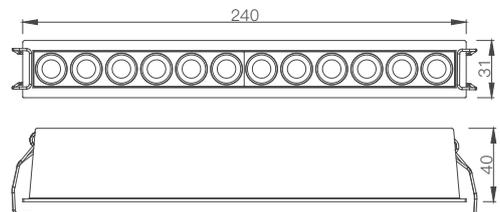

236x27mm

D123-5

**Note:**

The lumen measured at the system 3000K.


Technical information may change, please refer to the datasheet.

以上流明測量值以3000K為測量數據。

詳細技術信息，請參閱規格書。



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
D123-4	10W	2700K/3000K/4000K	24°/36°	810lm	≥90
D123-5	15W	2700K/3000K/4000K	24°/36°	1160lm	≥90
D123-6	15W	2700K/3000K/4000K	24°/36°	1100lm	≥90

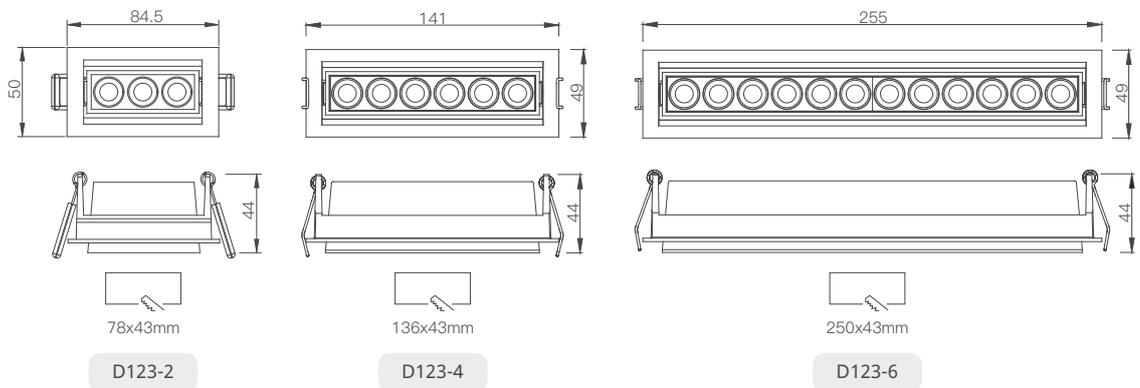

○ White 白

● Black 黑

Merging traditional grid design, provides optical solutions for wall washing, ambient lighting, and spotlighting. With optional frames, it achieves a sleek look with multifunctionality.

結合傳統格柵造型，提供洗牆、基礎照明、重點照明光學解決方案，同時可選搭外框，造型俐落兼具多功能。



# Matrix


# Matrix Series



Input Voltage 輸入電壓 100-240Vac 50/60Hz



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
D47	14W	2700K/3000K/4000K/Tunable	Asymmetric wallwash 偏光洗牆	1000lm	≥90
D47-1	14W	2700K/3000K/4000K/Tunable	15°/24°/36°	650lm	≥90
D47-2	43W	2700K/3000K/4000K/Tunable	Asymmetric wallwash 偏光洗牆	1800lm	≥90
D47-3	43W	2700K/3000K/4000K/Tunable	15°/25°/30°	1700lm	≥90

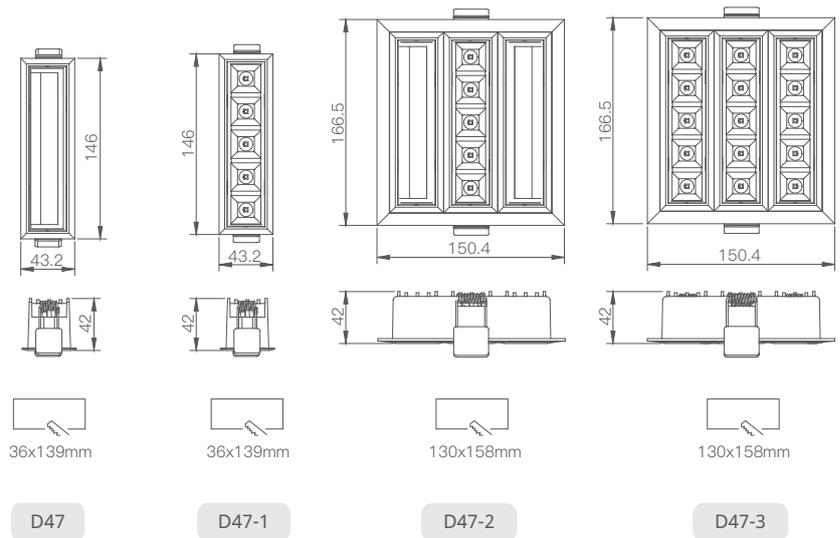

**Note:**

The lumen measured at the system 3000K.

Technical information may change, please refer to the datasheet.

以上流明測量值以3000K為測量數據。

詳細技術信息，請參閱規格書。

○ White 白

● Black 黑

Equipped with a stepper motor, it operates in utmost silence without electrical noise, offering various control options. The luminaire style embodies an ultimate tech aesthetic.

搭載步進馬達，極致寧靜無電噪音，提供多種控制選擇，展現極致科技風格



# RoboCan



# RoboCan Series



Input Voltage 輸入電壓 100-240Vac 50/60Hz



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
D63-1	ZigBee 28W	2700K/3000K/4000K	7°	1800lm	≥90
D63-2	ZigBee 28W	2700K/3000K/4000K/Tunable	24°	1880lm	≥90
D63-3	2.4G 28W	2700K/3000K/4000K	7°	1800lm	≥90
D63-4	2.4G 28W	2700K/3000K/4000K/Tunable	24°	1880lm	≥90

## Accessories 配件



ZigBee Gateway  
ZigBee 網關




2.4G Remote Control  
2.4G遙控器

## Android available 適用安卓



Download LynxPro APP  
下載 LynxPro APP

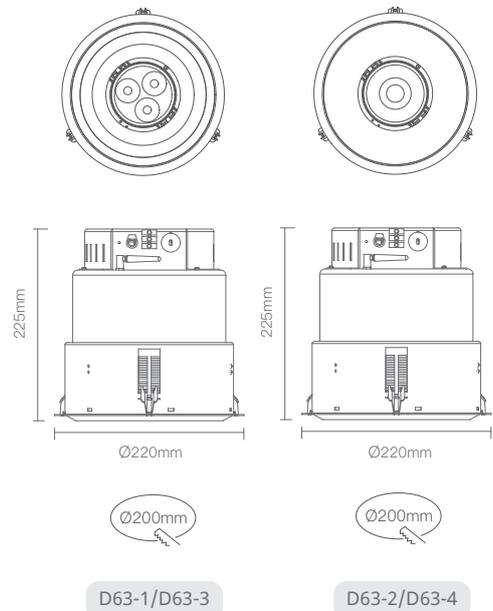

### Note:

The lumen measured at the system 3000K.  
Technical information may change, please refer to the datasheet.  
以上流明測量值以3000K為測量數據。  
詳細技術信息，請參閱規格書。

○ White 白

● Black 黑



# RoboRadar

Offering three installation options while maintaining an unparalleled tranquility, it boasts an upgraded functionality with three-axis control.

提供三種安裝方式，同樣擁有極致寧靜，功能進一步升級至三軸控制。



D69-2



C43



D69-1



reddot winner 2021  
lighting design

D69-1



D69-2



C43



Beauty.

Fashion world



# RoboRadar Series



Input Voltage 輸入電壓 100-240Vac 50/60Hz



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
D69/D69-2/D69-4	20W	2700K/3000K/4000K/Tunable	15°/24°/36°	1690lm	≥90
D69-1/D69-3/D69-5	20W	2700K/3000K/4000K/Tunable	15°/24°/36°	1690lm	≥90
C43/C43-1/C43-2	20W	2700K/3000K/4000K/Tunable	15°/24°/36°	1690lm	≥90

Comparison of control system models 控制系統型號對照



Accessories 配件




2.4G Remote Control  
2.4G 遙控器

IOS available 適用IOS



Download LynxLite APP  
下載 LynxLite APP

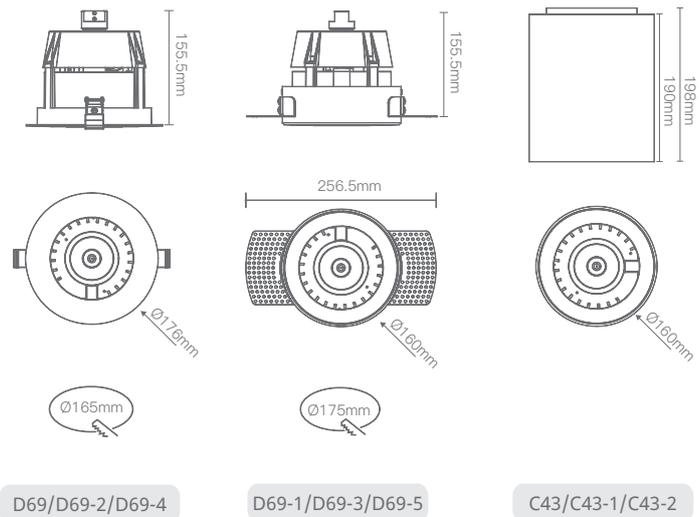

Note:

The lumen measured at the system 3000K.  
Technical information may change, please refer to the datasheet.  
以上流明測量值以3000K為測量數據。  
詳細技術信息，請參閱規格書。

○ White 白

● Black 黑

## Ceiling Light & Pendant Light

161-162  
Stral Series



163-166  
Clio Series



167-170  
Brila Series



171-174  
Cylinder Series



# Ceiling Light & Pendant Light

This wall wash light features a unique optical design, providing uniform and bright illumination across tall walls.

這款洗牆燈具有特殊光學設計，能實現整面高牆均勻透亮的照明效果。




CA2-3



CA2-2



CA2-1

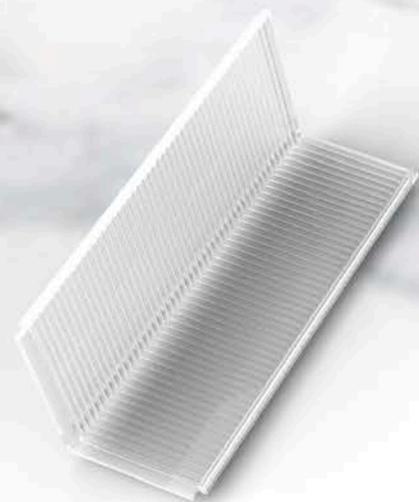

# Stral


# Stral Series



Input Voltage 輸入電壓 100-240Vac 50/60Hz



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
C42-1	9W	2700K/3000K/4000K	Asymmetric wallwash 偏光洗牆	630lm	≥90
C42-2	19W	2700K/3000K/4000K	Asymmetric wallwash 偏光洗牆	1170lm	≥90
C42-3	27W	2700K/3000K/4000K	Asymmetric wallwash 偏光洗牆	1670lm	≥90

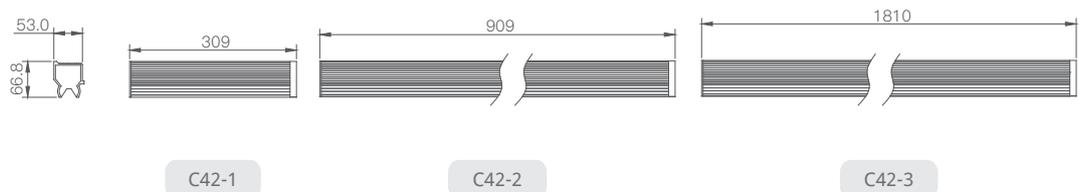

**Note:**

The lumen measured at the system 3000K.  
 Technical information may change, please refer to the datasheet.  
 以上流明測量值以3000K為測量數據。  
 詳細技術信息，請參閱規格書。

Aluminum 鋁本色


# Clio




C46-1

C46-3

C46-2

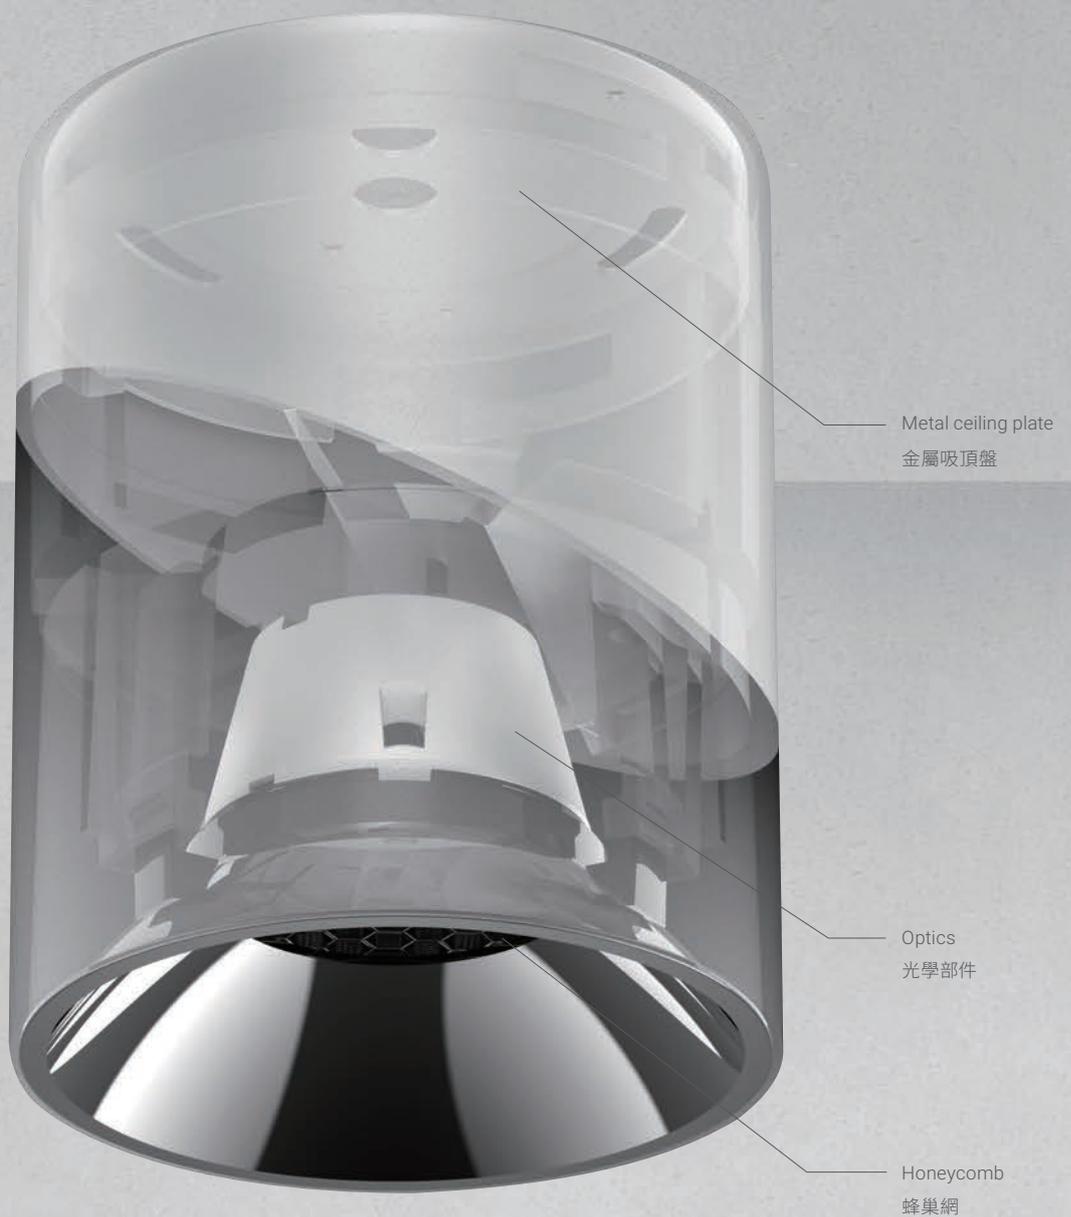


Easy installation 簡易安裝

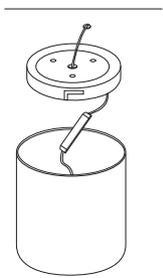


Turn off the electricity. Connect the live and neutral cable to the L.N cables of the driver.

關閉電力，連接 L、N 線至驅動器

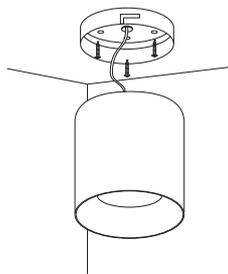


Fixed the ceiling plate onto the ceiling.

固定吸頂盤至天花板

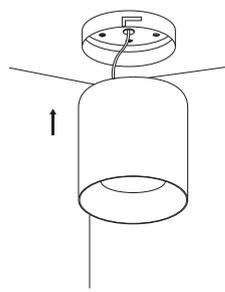

Put on the surface-mounted light and fixed the light by 2 screw

放上筒燈並鎖上側邊螺絲



Turn the power back on and light is on.

打開電源




# Clio Series



Input Voltage 輸入電壓 100-240Vac 50/60Hz



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
C46-1	10W	2700K/3000K/4000K/Tunable	15°/24°	600lm	≥90
C46-2	20W	2700K/3000K/4000K/Tunable	18°/24°/30°	1030lm	≥90
C46-3	30W	2700K/3000K/4000K/Tunable	15°/24°/36°	1590lm	≥90

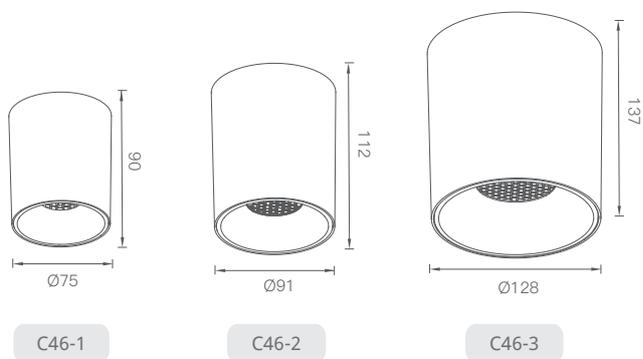

**Note:**


The lumen measured at the system 3000K.  
 Technical information may change, please refer to the datasheet.  
 以上流明測量值以3000K為測量數據。  
 詳細技術信息，請參閱規格書。

○ White 白

● Black 黑



P36



P38



P37



P40



P39

# Brila



P41



P43



P42-2



P42-1



P42-3

The unique glass pendant series, with a special coating, exudes a distinctive style both lit and unlit. Perfect for focal illumination or captivating ambient lighting.

獨特的玻璃吊燈系列以特殊塗層工藝呈現，無論亮或不亮，皆展現獨特風格。可作為照明亮點或迷人的氛圍燈

# Brila Series

Input Voltage 輸入電壓 100-240Vac 50/60Hz



Non-dim



0-10V



DALI



Triac




Aco Smart



CASAMBI

Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
P36	4.5W	2700K/3000K/4000K/Tunable	Flood 泛光	330lm	≥90
P37	4.5W	2700K/3000K/4000K/Tunable	Flood 泛光	330lm	≥90
P38	3W	2700K/3000K/4000K/Tunable	Flood 泛光	170lm	≥90
P39	3W	2700K/3000K/4000K/Tunable	Flood 泛光	170lm	≥90
P40	3W	2700K/3000K/4000K/Tunable	Flood 泛光	170lm	≥90

This series of pendant lights can also be applied into the Low-voltage magnetic Maga series.  
Ultra-thin magnetic of Lamina series and the recessed light of Boite series.  
該系列吊燈也可應用於低壓磁吸maga系列、超薄磁吸Lamina系列及嵌燈Boite系列。

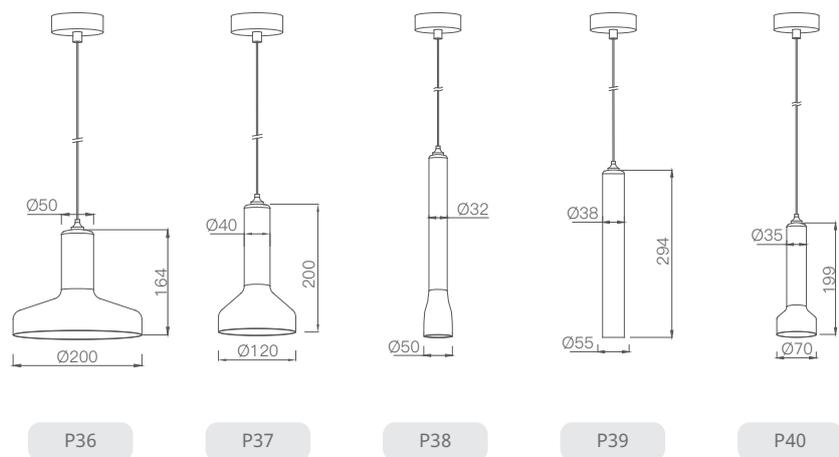

**Note:**

The lumen measured at the system 3000K.

Technical information may change, please refer to the datasheet.

以上流明測量值以3000K為測量數據。

詳細技術信息，請參閱規格書。



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
P41	4.5W	2700K/3000K/4000K/Tunable	Flood 泛光	330lm	≥90
P42-1	3W	2700K/3000K/4000K/Tunable	Flood 泛光	120lm	≥90
P42-2	3W	2700K/3000K/4000K/Tunable	Flood 泛光	120lm	≥90
P42-3	3W	2700K/3000K/4000K/Tunable	Flood 泛光	120lm	≥90
P43	3W	2700K/3000K/4000K	Flood 泛光	120lm	≥90



P41



P42-1



P42-2



P42-3



P43





Blending varied optical features, including adjustable angle filters and focal length, this pendant light series combines a refined appearance with elegance and uniqueness.

融合多樣光學功能，擁有可變角度濾片及焦距調整，外觀精緻，不失高雅獨特。

# Cylinder



ESPRESSO COFFEE		COFFEE		TEA		ESPRESSO	
Caffe Laffe	\$10.00	Caffe Laffe	\$10.00	Caffe Laffe	\$10.00	Caffe Laffe	
Valiffe Laffe	\$10.00	Valiffe Laffe	\$10.00	Valiffe Laffe	\$10.00	Valiffe Laffe	
Caffe Laffe	\$10.00	Caffe Laffe	\$10.00	Caffe Laffe	\$10.00	Caffe Laffe	
Valiffe Laffe	\$10.00	Valiffe Laffe	\$10.00	Valiffe Laffe	\$10.00	Valiffe Laffe	
Caffe Laffe	\$10.00	Caffe Laffe	\$10.00	Caffe Laffe	\$10.00	Caffe Laffe	
Valiffe Laffe	\$10.00	Valiffe Laffe	\$10.00	Valiffe Laffe	\$10.00	Valiffe Laffe	

# Cylinder Series

Input Voltage 輸入電壓 100-240Vac 50/60Hz



Non-dim



0-10V



DALI



Triac




Aco Smart

Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
P1	3W	2700K/3000K/4000K	Flood 泛光	120lm	≥90
P1-1	3W	2700K/3000K/4000K	50°	85lm	≥90
P1-2	3W	2700K/3000K/4000K	Flood 泛光	120lm	≥90

This series of pendant lights can also be applied into the Low-voltage magnetic Maga series.

Ultra-thin magnetic of Lamina series and the recessed light of Boite series.

該系列吊燈也可應用於低壓磁吸maga系列、超薄磁吸Lamina系列及嵌燈Boite系列。

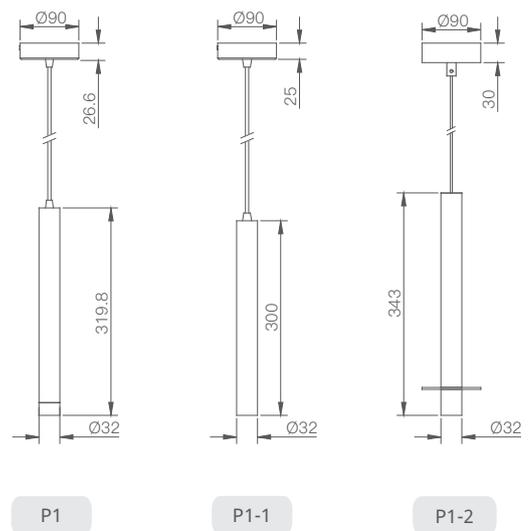

**Note:**

The lumen measured at the system 3000K.

Technical information may change, please refer to the datasheet.

以上流明測量值以3000K為測量數據。

詳細技術信息，請參閱規格書。



Model Name 型號	Power Consumption 整燈功率	Color Temperature 色溫	BA. 光束角	Luminous Flux 光通量	CRI 顯色指數
P21	10W	2700K/3000K/4000K*	10°+Magnetic filter 10°+磁吸濾片	420lm	≥90
P21-1	10W	2700K/3000K/4000K*	10°+Magnetic filter 10°+磁吸濾片	420lm	≥90
P29-1	 10W	2700K/3000K/4000K/Tunable	17°-45°	700lm	≥90
P29-2	 15W	2700K/3000K/4000K/Tunable	17°-45°	890lm	≥90

\* Tunable version with condition, please contact us. 可改為雙色溫版本，請聯繫我們。


#### Accessories 配件

##### Magnetic filter 磁吸濾片



##### Front trim color 前環顏色

- Black 黑
- White 白
- Black Chrome 黑鉻
- Chrome 白鉻

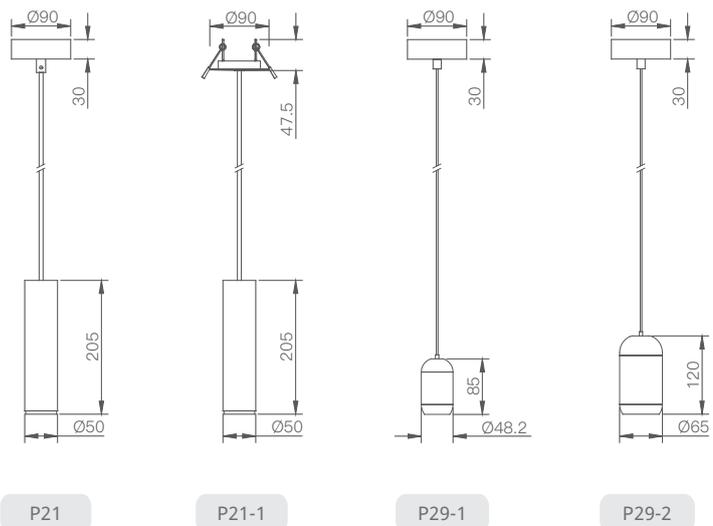

○ White 白

● Black 黑





Taiwan 台灣

Shilin Dist. 士林區

T +886 2 2876 7979  
E k154142@gmail.com

No.85,Tianmu E.Rd.,Shilin  
Dist.,Taipei City,Taiwan(R.O.C)

台北市士林區天母東路85號

Sanchong Dist. 三重區

T +886 2 2876 7979  
E k154142@gmail.com

No. 352, Bihua St., Sanchong Dist.,  
New Taipei City, Taiwan (R.O.C.)

新北市三重區碧華街352號

Songshan Dist. 松山區

T +886 2 2545 1166  
E stone.yu@eliz.com.tw

No. 5, Ln. 15, Jiankang Rd., Songshan  
Dist., Taipei City, Taiwan (R.O.C.)

台北市松山區健康路15巷5號

Thailand 泰國

T +66 81 611 9976 / +66 84 648 3823 / +66 84 071 2064  
E domestic@vewalight.com / info@vewalight.com

4 Soi Bang Ka-Dee 9, Rama 2 Rd., Sa-Mae Dum,  
Bangkhunthien, Bangkok 10150, Thailand

United Kingdom 英國

T +44 7510 317 505  
E james@acofusion.com

23 Queen St, Portsea, Portsmouth  
PO1 3HN

China 中國

T +86 769 8808 6691  
F +86 769 8808 6696  
E service@acofusion.com

Buiding 4,No.9,Shanxia Industrial Zone Road,  
Hengli Town,Dongguan City,GuangDong

廣東省東莞市橫瀝鎮山廈工業區路9號4號樓



Acofusion