




Cubie

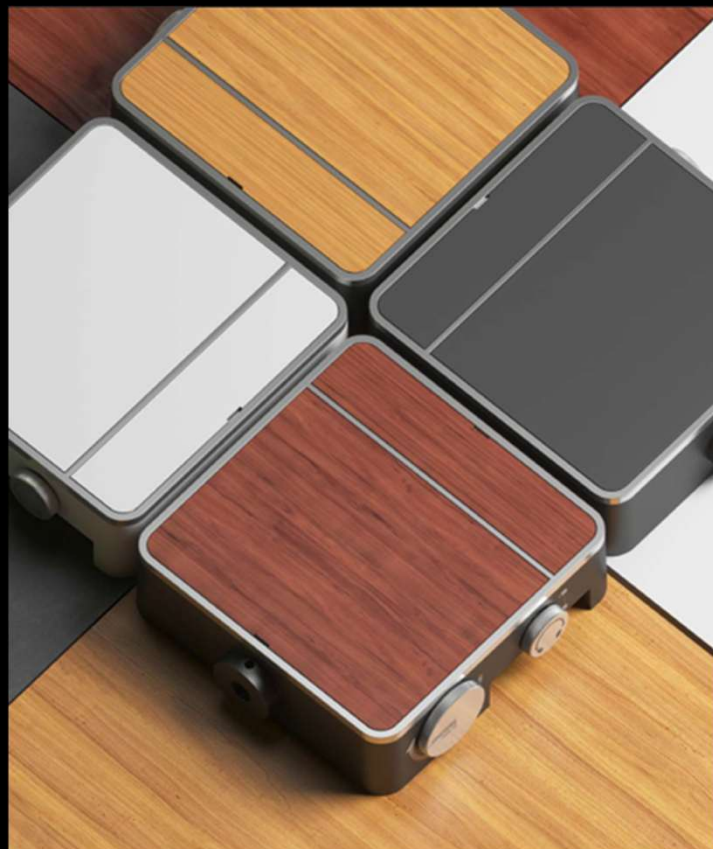

ACOfusion

Seamless zoomable beam



Zoomable
20°-58

Spot
8°

Zoomable
20°-58

Fixed Beam
15°/24°/36°

Wallwash

General Information





On board Dimming

Safety Lock



Available
Black RAL9005
White, RAL9003

- Modulised solution
- Available in different beam
- Honeycomb accessories

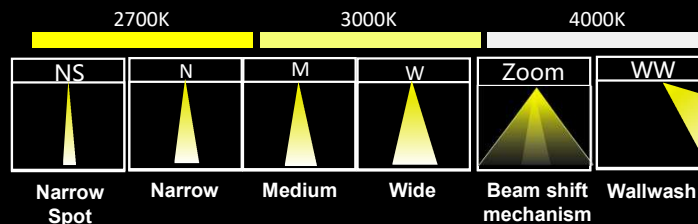

35W **3300 lm**

- The measurement was done with CCT 3000K, CRI90
- CRI 92/ 95 options are available upon request.
- For further details, please visit: <https://www.acofusion.com/product/559>

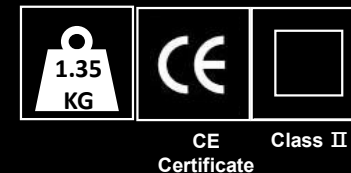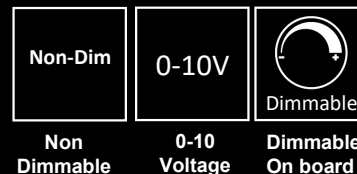



Ultra-Spot

22 w

S40-3

1730 lm

Zoom

35 w

S40

2500 lm

Fixed-Beam

35 w

S40-1

3200 lm

Wallwash

35w

S40-2

2300 lm

Hot Swapping Module



Spot

NS

N

M

W



8°


12°

24°

36°

Zoom

Wallwash

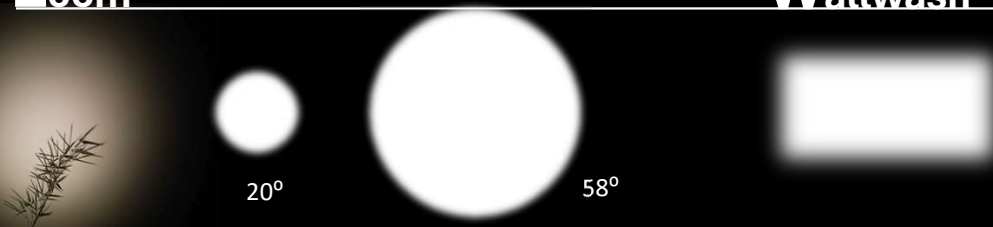

20°




58°

Summary

COfusion



	Cubie-Zoom	Cubie	Cubie-Spot	Cubie-Wallwash
Wattage	35	35	22	35
Lumen	2500	3200	1730	2300
CRI	≥ 90	≥ 90	≥ 90	≥ 90
Feature	Zoomable Beam	Fixed Beam	Narrow Spot	Wallwash
Beam	17°- 45°	15°/ 24°/ 36°	08°	Asymmetrical beam
Smart home	√	√	√	√
Model#	S40	S40-1	S40-3	S40-2





COfusion



Cubie

CCT	Lumen	Wattage	Feature
2700K	2150	2100	35 CRI ≥ 90
3000K	2250	2300	35 CRI ≥ 90
4000K	2400	2400	35 CRI ≥ 90
Model#	S40-1: 15°/ 24°/ 38°		

15°			15°			24°			36°		
EO ^{35W}			EO ^{35W}			EO ^{35W}			EO ^{35W}		
H(m)	E(lx)	Φ(m)	H(m)	E(lx)	Φ(m)	H(m)	E(lx)	Φ(m)	H(m)	E(lx)	Φ(m)
1	19372	0.25	6	540	1.4	1	10640	0.4	1	6090	0.6
2	4840	0.5	7	395	1.7	2	2660	0.8	2	1520	1.2
3	2150	0.7	8	300	1.9	3	1180	1.2	3	675	1.8
4	1210	0.9	9	240	2.1	4	665	1.6	4	380	2.4
5	775	1.2	10	190	2.4	5	425	2	5	245	3

△ 15° ▲ 24° ▲ 36°

* Measurement was based on 3000K CRI 90



ACOfusion




Cubie- Ultra Spot


CCT	Lumen		Wattage	CRI
2700K			1575	22 ≥ 90
3000K			1750	22 ≥ 90
4000K			1875	22 ≥ 90
Model#	S40-3: 08°			

08°			08°		
E0 22W			E0 22W		
H(m)	E(lx)	Φ(m)	H(m)	E(lx)	Φ(m)
1	35215	0.15	6	980	0.8
2	8805	0.3	7	715	1.0
3	3913	0.4	8	550	1.1
4	2200	0.6	9	435	1.3
5	1405	0.7	10	350	1.4

* Measurement was based on 3000K CRI 90



ACOfusion

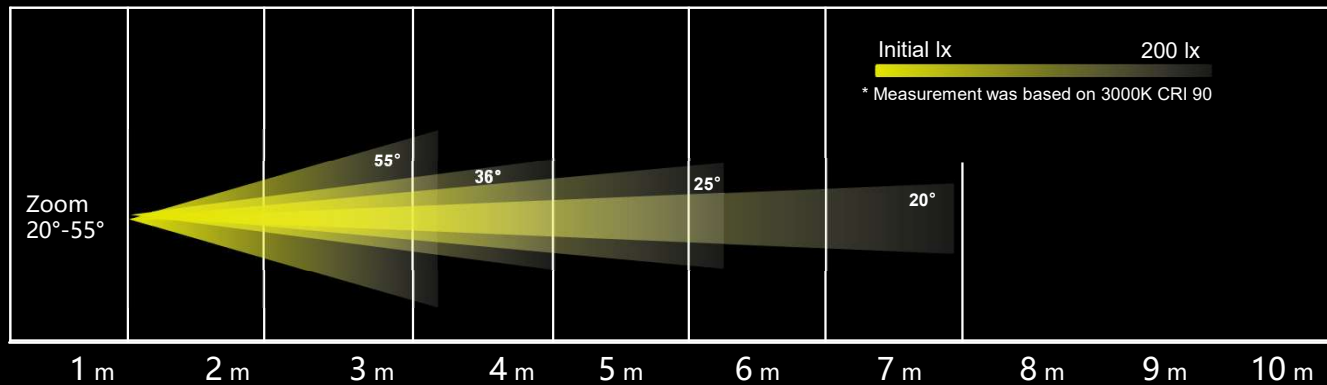

Cubie-Zoom

CCT	Lumen	Wattage	Feature
2700K	1900	35	Rotate Adjust
3000K	2000	35	Rotate Adjust
4000K	2100	35	Rotate Adjust

Model# S40

20°			20°			58°			20°		
35W			35W			35W			35W		
H(m)	E(lx)	Φ(m)	H(m)	E(lx)	Φ(m)	H(m)	E(lx)	Φ(m)	H(m)	E(lx)	Φ(m)
1	12295	0.3	6	340	1.7	1	2590	0.9	6	340	1.7
2	3070	0.6	7	250	2	2	645	1.9	7	250	2
3	1365	0.9	8	190	2.3	3	285	2.8	8	190	2.3
4	765	1.2	9	150	2.6	4	160	3.8	9	150	2.6
5	490	1.5	10	125	2.9	5	100	4.7	10	125	2.9

* Measurement was based on 3000K CRI 90



ACOfusion



Cubie-Wallwash

CCT	Lumen	Wattage	Feature
2700K	2050	35	Asymmetrical Wallwash
3000K	2150	35	Asymmetrical Wallwash
4000K	2300	35	Asymmetrical Wallwash

Model# S40-2



* Measurement was based on 3000K CRI 90

For further information or technical details
Please don't hesitate to contact us.

Please visit: <http://www.acofusion.com>

2024 Catalogue: <https://www.acofusion.com/download>

Email: james@acofusion.com

