



ACOfusion


Pro-

Precision in Light Control



Barn cover



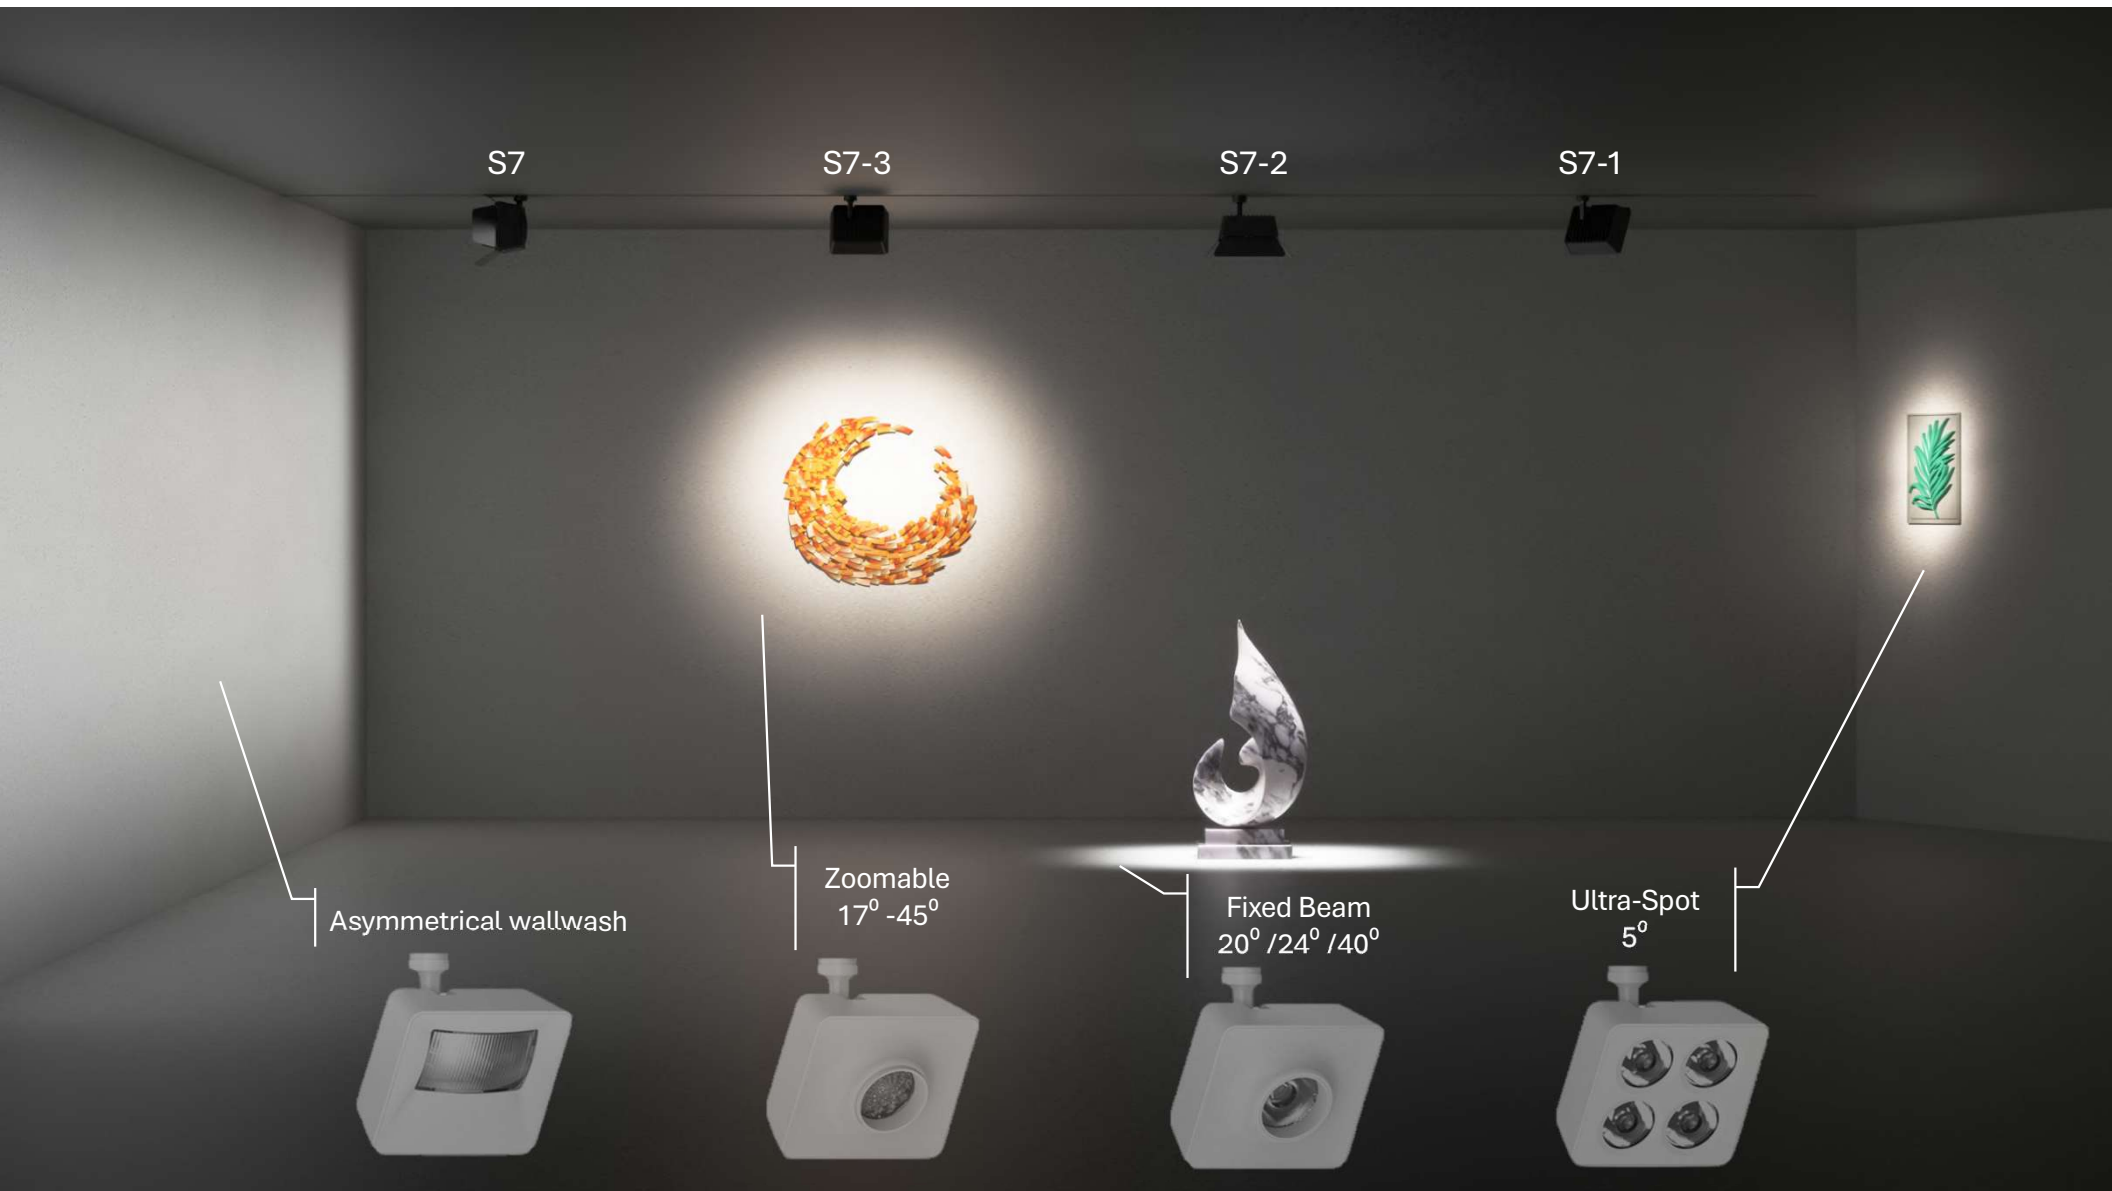

S7

S7-3

S7-2

S7-1

Asymmetrical wallwash

Zoomable
17° -45°

Fixed Beam
20° /24° /40°

Ultra-Spot
5°

Optical Features

ACOfusion

17°-45°

5°

18°/24°/40°

Rectangular
Wallwash

H: 6m

Zoomable




Ultra-Spot



Fixed Beam



Wallwash



H(m)	Model#	Watt	Beam
Pro	S7-3	27	17°-45°

H(m)	Model#	Watt	Beam
Pro	S7-1	23	5°

H(m)	Model#	Watt	Beam
Pro	S7-2	27	15°/24°/36°

H(m)	Model#	Watt	Beam
Pro	S7	27	Rectangular



Seamless and smooth zoomable beam

ACOfusion



Wallwash and Barn cover accessorie

ACOfusion

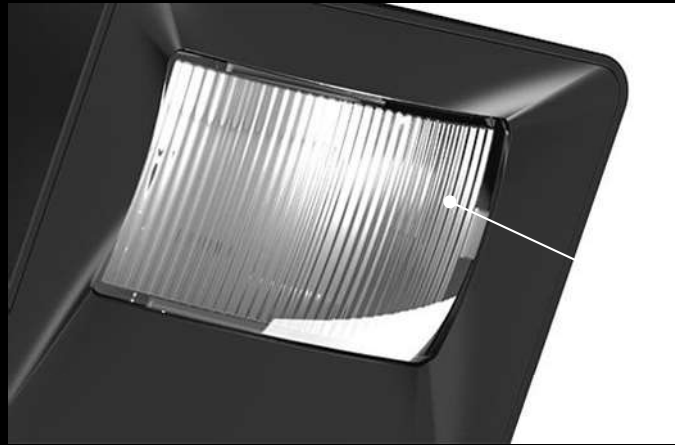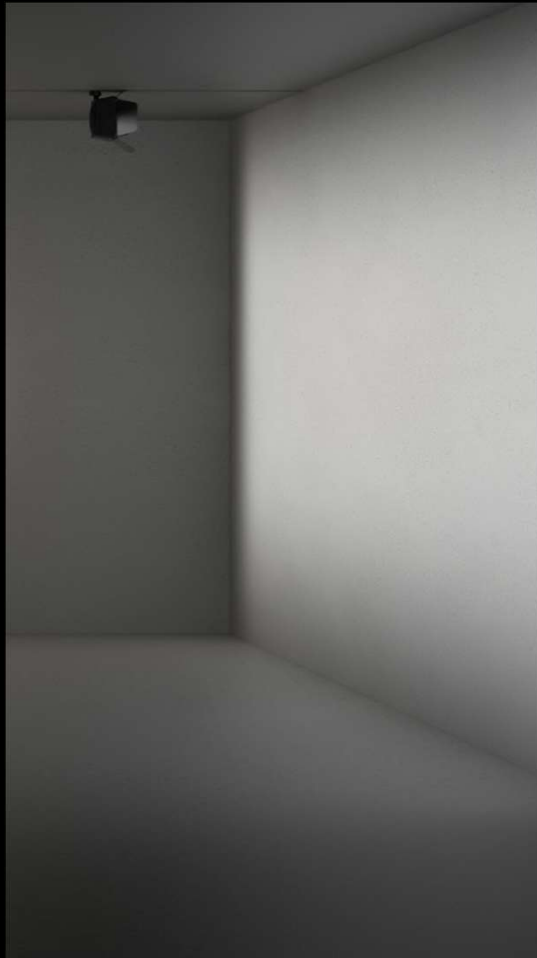

Rectangular Wallwash optical design



Barn cover is available with snap in feature




Overall Summary


ACOfusion



Barn cover

	Pro-Zoom	Pro-Fixed Beam	Pro-Ultra Spot	Pro-Wallwash
Wattage	27	27	23	27
Lumen	1800	2400	2200	1500
CRI	≥ 90	≥ 90	≥ 90	≥ 90
Feature	Zoomable Beam	Fixed Beam	Ultra Spot	Wallwash
Beam	17°- 45°	18°/ 24°/ 40°	5°	Rectangular
Smart home	√	√	√	√
Model#	S40	S40-1	S40-3	S40-2





ACOfusion




Pro-Zoom

CCT	Lumen	Wattage	Feature
2700K	1700	27	Rotate adjust
3000K	1800	27	Rotate adjust
4000K	2000	27	Rotate adjust
Tunable	1575	27	
	1873	27	
Model#	S7-3		

▲ 17° ▲ 45°

17° 27W			17° 27W			45° 27W		
H(m)	E(lx)	Φ(m)	H(m)	E(lx)	Φ(m)	H(m)	E(lx)	Φ(m)
1	11400	0.3	6	315	1.8	1	2860	0.8
2	2850	0.6	7	230	2.1	2	285	1.6
3	1265	0.9	8	180	2.4	3	315	2.4
4	710	1.2	9	140	2.7	4	175	3.2
5	455	1.5	10	115	3.0	5	115	4






ACOfusion




Pro- Wallwash

CCT	Lumen	Wattage	Feature
2700K	2050	27	Rectangular Beam
3000K	2200	27	Rectangular Beam
4000K	2300	27	Rectangular Beam
Tunable	1575	27	$\geq 90^\circ$
	1873	27	$\geq 90^\circ$
Model#	S7		

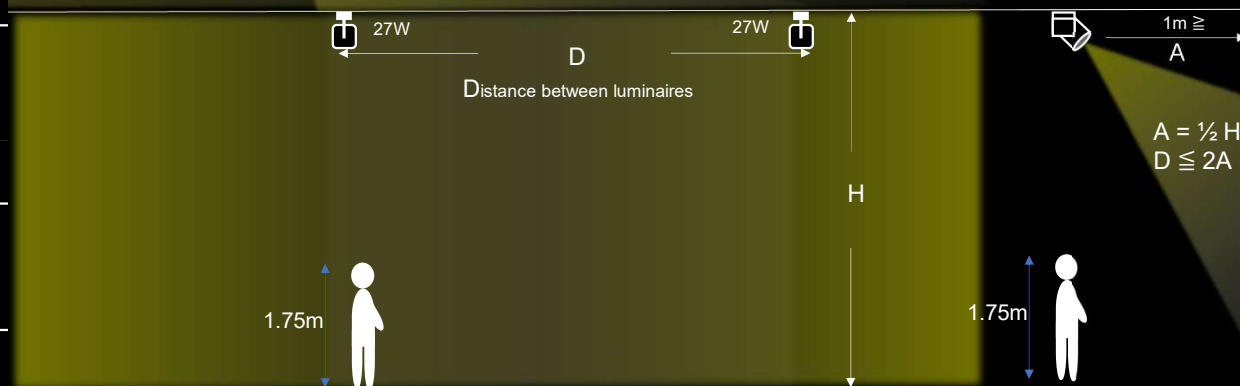



ACOfusion



Pro- Ultra Spot

CCT	Lumen	Wattage	Feature
2700K	2100	23	≥ 90
3000K	2200	23	≥ 90
4000K	2300	23	≥ 90
Tunable	1575	23	≥ 90
	1873	23	≥ 90
Model#	S7-1		

5° 23W

H(m)	E(lx)	Φ (m)
1	97557	0.1
2	41355	0.2
3	10840	0.3
4	6100	0.4
5	3900	0.6

1.75m

5° 23W

H(m)	E(lx)	Φ (m)
6	2710	0.7
7	1990	0.8
8	1525	0.9
9	1205	1.0
10	975	1.2

1.75m



ACOfusion



Pro- Fixed Beam

CCT	Lumen	Wattage	Feature
2700K	2300	27	≥ 90
3000K	2400	27	≥ 90
4000K	2500	27	≥ 90
Tunable	1575	27	≥ 90
	1873	27	≥ 90
Model#	S7-2		

▲ 18° ▲ 45°

18°
27W

H(m)	E(lx)	Φ(m)
1	20625	0.4
2	5155	0.7
3	2290	1.1
4	1290	1.4
5	825	1.8

1.75m

24°
27W

H(m)	E(lx)	Φ(m)
1	14960	0.4
2	3740	0.8
3	1660	1.3
4	935	1.7
5	600	2.1

1.75m

40°
27W

H(m)	E(lx)	Φ(m)
1	6770	0.5
2	1690	1.1
3	752	1.6
4	420	2.1
5	270	2.6

1.75m