


# P21-L

## Pendant Series



- 黑色/Black
- 白色/White

### 線圖/Dimensions




### 調光控制系統/Dimming Control



### 規格/Technical Specifications

輸入電壓:DC48V  
 功率:10W  
 光通量:420lm  
 材質:鋁  
 光束角:10°  
 濾片角度:15°/25°/38°/10x35°/蜂網片  
 顯示指數:≥90  
 色溫:2700K/3000K/4000K  
 Input Voltage:DC48V  
 Power:10W  
 Luminous Flux:420lm  
 Material:Aluminum  
 BA.:10°  
 Filter Angle.:15°/25°/38°/10x35°/Honey Comb  
 CRI:≥90  
 CCT:2700K/3000K/4000K

### 配光曲線圖/Light pattern

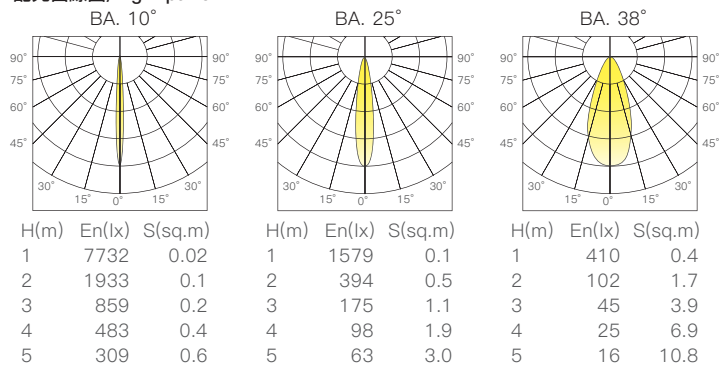

### 光学配件/Front Ring Color




# P24-L Pendant Series



- 黑色/Black
- 白色/White

### 線圖/Dimensions

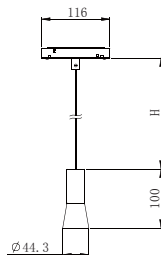


### 調光控制系統/Dimming Control



### 規格/Technical Specifications

輸入電壓:DC48V  
 功率:7W  
 光通量:380lm  
 材質:鋁  
 光束角:15°/20°/30°  
 顯示指數:≥90  
 色溫:2700K/3000K/4000K/雙色溫  
 Input Voltage:DC48V  
 Power:7W  
 Luminous Flux:380lm  
 Material:Aluminum  
 BA.:15°/20°/30°  
 CRI:≥90  
 CCT:2700K/3000K/4000K/Tunable

### 配光曲線圖/Light pattern

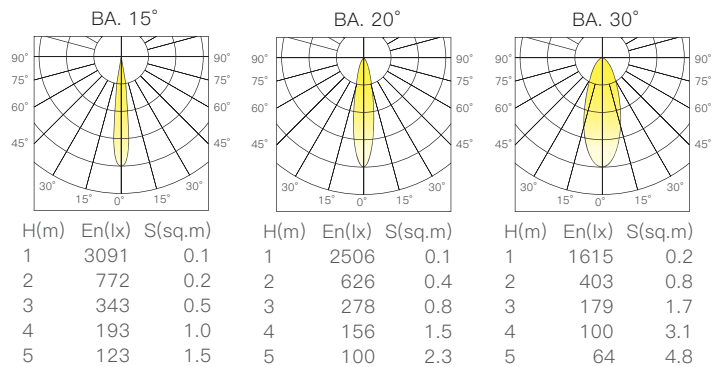


# P24-1-L

## Pendant Series



- 黑色/Black
- 白色/White
- 玫瑰金/Rose Golden
- 宝石蓝/Sapphire Blue
- 青草绿/Grass Green

### 線圖/Dimensions




### 調光控制系統/Dimming Control



### 規格/Technical Specifications

輸入電壓:DC48V  
 功率:10W  
 光通量:420lm  
 材質:鋁  
 光束角:10°  
 濾片角度:15°/25°/38°/10x35°/蜂網片  
 顯示指數:≥90  
 色溫:2700K/3000K/4000K  
 Input Voltage:DC48V  
 Power:10W  
 Luminous Flux:420lm  
 Material:Aluminum  
 BA.:10°  
 Filter Angle.:15°/25°/38°/10x35°/Honey Comb  
 CRI:≥90  
 CCT:2700K/3000K/4000K

### 配光曲線圖/Light pattern

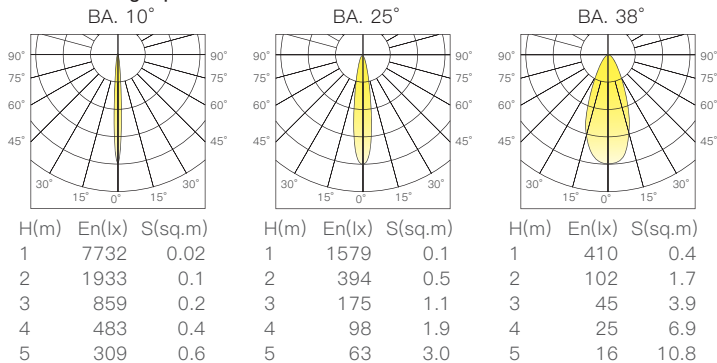

### 光学配件/Front Ring Color




# P24-2-L Pendant Series



- 黑色/Black
- 白色/White

### 線圖/Dimensions




### 調光控制系統/Dimming Control



### 規格/Technical Specifications

輸入電壓:DC48V  
 功率:7W  
 光通量:380lm  
 材質:鋁  
 光束角:15°/20°/30°  
 顯示指數:≥90  
 色溫:2700K/3000K/4000K/雙色溫  
 Input Voltage:DC48V  
 Power:7W  
 Luminous Flux:380lm  
 Material:Aluminum  
 BA.:15°/20°/30°  
 CRI:≥90  
 CCT:2700K/3000K/4000K/Tunable

### 配光曲線圖/Light pattern

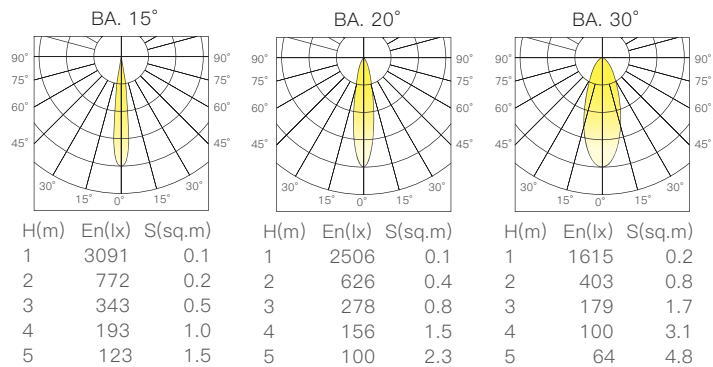


# P25-L Pendant Series



- 黑色/Black
- 白色/White

### 線圖/Dimensions




### 調光控制系統/Dimming Control



### 規格/Technical Specifications

輸入電壓:DC48V  
 功率:7W  
 光通量:600lm  
 材質:鋁  
 光束角:24°/36°  
 顯示指數:≥90  
 色溫:2700K/3000K/4000K/雙色溫  
 Input Voltage:DC48V  
 Power:7W  
 Luminous Flux:600lm  
 Material:Aluminum  
 BA.:24°/36°  
 CRI:≥90  
 CCT:2700K/3000K/4000K/Tunable

### 配光曲線圖/Light pattern

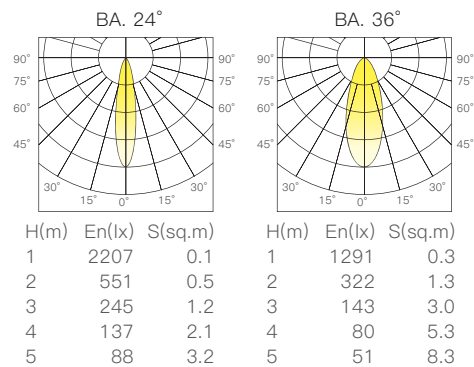


# P25-1-L

## Pendant Series



- 黑色/Black
- 白色/White
- 玫瑰金/Rose Golden
- 宝石蓝/Sapphire Blue
- 青草绿/Grass Green

### 線圖/Dimensions




### 調光控制系統/Dimming Control



### 規格/Technical Specifications

輸入電壓:DC48V  
 功率:7W  
 光通量:360lm  
 材質:鋁  
 光束角:24°  
 顯示指數:≥90  
 色溫:2700K/3000K/4000K/雙色溫  
 Input Voltage:DC48V  
 Power:7W  
 H Luminous Flux:36H 0lm  
 Material:Aluminum  
 BA.:24°  
 CRI:≥90  
 CCT:2700K/3000K/4000K/Tunable

### 配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	1300	0.2
2	325	0.7
3	144	1.5
4	8.1	2.6
5	52	4.1




# P27-L Pendant Series



- 黑色/Black
- 白色/White

### 線圖/Dimensions




### 調光控制系統/Dimming Control



### 規格/Technical Specifications

輸入電壓:DC48V  
 功率:10W  
 光通量:400lm  
 材質:鋁  
 光束角:15°/25°  
 顯示指數:≥90  
 色溫:2700K/3000K/4000K/雙色溫  
 Input Voltage:DC48V  
 Power:10W  
 Luminous Flux:400lm  
 Material:Aluminum  
 BA.:15°/25°  
 CRI:≥90  
 CCT:2700K/3000K/4000K/Tunable

### 配光曲線圖/Light pattern

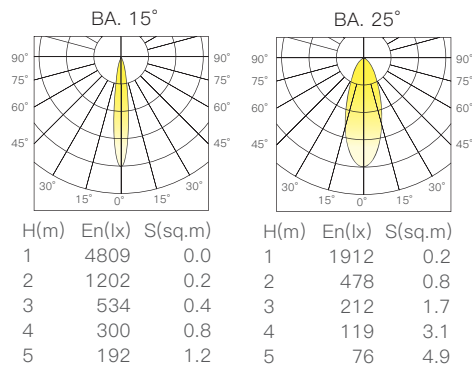


# P29-1-L

## Pendant Series



- 黑色/Black
- 白色/White

### 線圖/Dimensions




### 調光控制系統/Dimming Control



### 規格/Technical Specifications

輸入電壓:DC48V  
 功率:10W  
 光通量:700lm  
 材質:鋁  
 光束角:17°-45°  
 顯示指數:≥90  
 色溫:2700K/3000K/4000K/雙色溫  
 Input Voltage:DC48V  
 Power:10W  
 Luminous Flux:700lm  
 Material:Aluminum  
 BA.:17°-45°  
 CRI:≥90  
 CCT:2700K/3000K/4000K/Tunable

### 配光曲線圖/Light pattern

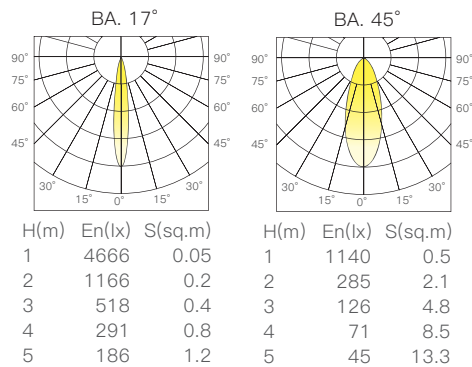




# P29-2-L

## Pendant Series



- 黑色/Black
- 白色/White

### 線圖/Dimensions

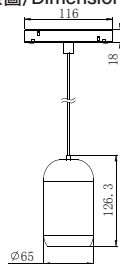

### 調光控制系統/Dimming Control



### 規格/Technical Specifications

輸入電壓:DC48V  
 功率:15W  
 光通量:890lm  
 材質:鋁  
 光束角:17°-45°  
 顯示指數:≥90  
 色溫:2700K/3000K/4000K/雙色溫  
 Input Voltage:DC48V  
 Power:15W  
 Luminous Flux:890lm  
 Material:Aluminum  
 BA.:17°-45°  
 CRI:≥90  
 CCT:2700K/3000K/4000K/Tunable

### 配光曲線圖/Light pattern

