


S70-1**FlexRay Series**

- 黑色/Black
- 白色/White

線圖/Dimensions**調光控制系統/Dimming Control****規格/Technical Specifications**

輸入電壓:100-265V 50/60Hz

功率:4W

光通量:150lm

材質:鋁

光束角:5°

顯示指數:≥97

色溫:4000K

色容差:≤2

Input Voltage:100-265V 50/60Hz

Power:4W

Luminous Flux:150lm


Material:Aluminum

BA.:5°

CRI:≥97

CCT:4000K

SDCM:≤2

配光曲線圖/Light pattern

H(m)	En(lx)	S(sq.m)
1	10867	0.005
2	2717	0.020
3	1207	0.045
4	679	0.080
5	434	0.124

光学配件/Front Ring Color

色溫濾片
CCT filter



蜂巢網
Honey comb



2700K/3000K/3500K

以上測量值以4000K為測試數據
Lumen measured of the data (4000K).




S70-2

FlexRay Series



- 黑色/Black
- 白色/White

線圖/Dimensions



調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:100-265V 50/60Hz

功率:10W

光通量:620lm

材質:鋁

光束角:5°

顯示指數:≥97

色溫:4000K

色容差:≤2

Input Voltage:100-265V 50/60Hz

Power:10W

Luminous Flux:620lm

Material:Aluminum


BA.:5°

CRI:≥97

CCT:4000K

SDCM:≤2

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	46257	0.004
2	11564	0.015
3	5140	0.034
4	2891	0.061
5	1850	0.096

光学配件/Front Ring Color

色溫濾片
CCT filter



蜂巢網
Honey comb




2700K/3000K/3500K

以上測量值以4000K為測試數據
Lumen measured of the data (4000K).



S70-3**FlexRay Series**

- 黑色/Black
- 白色/White

線圖/Dimensions**調光控制系統/Dimming Control****規格/Technical Specifications**

輸入電壓:100-265V 50/60Hz

功率:27W

光通量:1340lm

材質:鋁

光束角:5°

顯示指數:≥97

色溫:4000K

色容差:≤2

Input Voltage:100-265V 50/60Hz

Power:27W

Luminous Flux:1340lm


Material:Aluminum

BA.:5°

CRI:≥97

CCT:4000K

SDCM:≤2

配光曲線圖/Light pattern

H(m)	En(lx)	S(sq.m)
1	95944	0.005
2	23986	0.023
3	10660	0.049
4	5997	0.091
5	3838	0.138

光学配件/Front Ring Color

色溫濾片
CCT filter



蜂巢網
Honey comb



2700K/3000K/3500K

以上測量值以4000K為測試數據
Lumen measured of the data (4000K).




S71-1

FlexRay Series



- 黑色/Black
- 白色/White

線圖/Dimensions



調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:100-265V 50/60Hz

功率:9W

光通量:410lm

材質:鋁

光束角:9°

濾片角度:15°/20°/27°/40°/48°/70°/20x60°/洗牆/蜂網片

顯示指數:≥97

色溫:4000K

色容差:≤2

Input Voltage:100-265V 50/60Hz

Power:9W

Luminous Flux:410lm

Material:Aluminum

BA.:9°

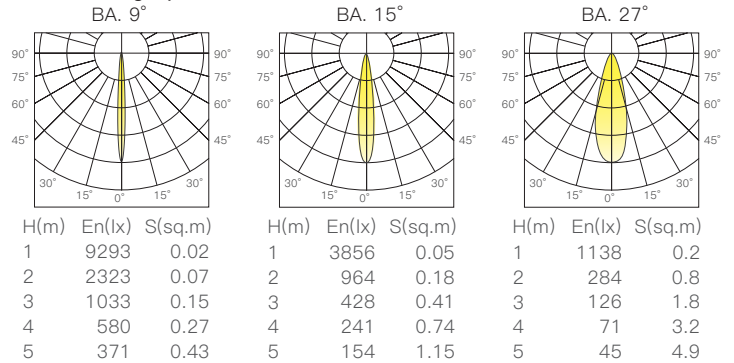
Filter Angle.:15°/20°/27°/40°/48°/70°/20x60°/wallwash/Honey Comb

CRI:≥97

CCT:4000K

SDCM:≤2

配光曲線圖/Light pattern



光学配件/Front Ring Color

角度濾片
Angle filter



15°/20°/27°/40°/48°
70°/20x60°/wallwash

色溫濾片
CCT filter



2700K/3000K/3500K

蜂巢網
Honey comb

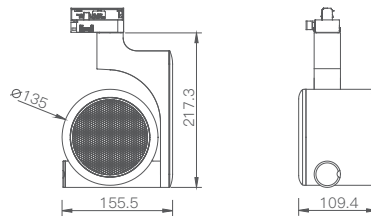


以上測量值以4000K為測試數據
Lumen measured of the data (4000K).



S71-2**FlexRay Series**

- 黑色/Black
- 白色/White

線圖/Dimensions**調光控制系統/Dimming Control****規格/Technical Specifications**

輸入電壓:100-265V 50/60Hz

功率:27W

光通量:1360lm

材質:鋁

光束角:9°

濾片角度:15°/20°/27°/40°/48°/70°/20x60°/洗牆/蜂巢片

顯示指數:≥97

色溫:4000K

色容差:≤2

Input Voltage:100-265V 50/60Hz

Power:27W

Luminous Flux:1360lm

Material:Aluminum

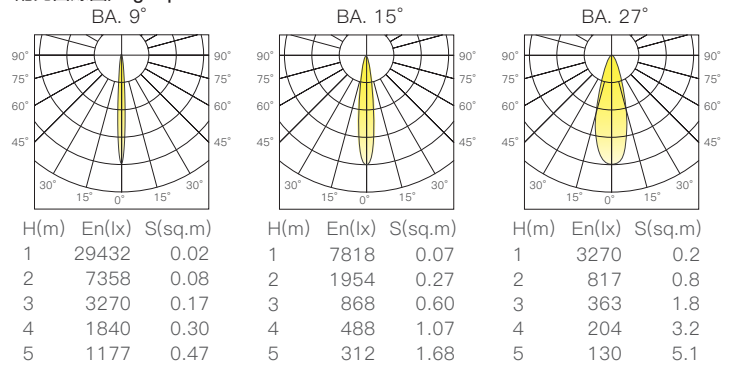
BA.:9°

Filter Angle.:15°/20°/27°/40°/48°/70°/20x60°/wallwash/Honey Comb

CRI:≥97

CCT:4000K

SDCM:≤2

配光曲線圖/Light pattern**光学配件/Front Ring Color**

角度濾片
Angle filter



15°/20°/27°/40°/48°
70°/20x60°/wallwash

色溫濾片
CCT filter



2700K/3000K/3500K

蜂巢網
Honey comb

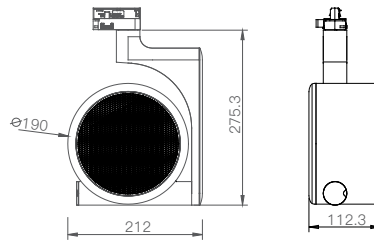


以上測量值以4000K為測試數據
Lumen measured of the data (4000K).



S71-3**FlexRay Series**

- 黑色/Black
- 白色/White

線圖/Dimensions**調光控制系統/Dimming Control**

定電流
non-dim

規格/Technical Specifications

輸入電壓:100-265V 50/60Hz

功率:50W

光通量:2570lm

材質:鋁

光束角:9°

濾片角度:15°/20°/27°/40°/48°/70°/20x60°/洗牆/蜂巢網

顯示指數:≥97

色溫:4000K

色容差:≤2

Input Voltage:100-265V 50/60Hz

Power:50W

Luminous Flux:2570lm

Material:Aluminum

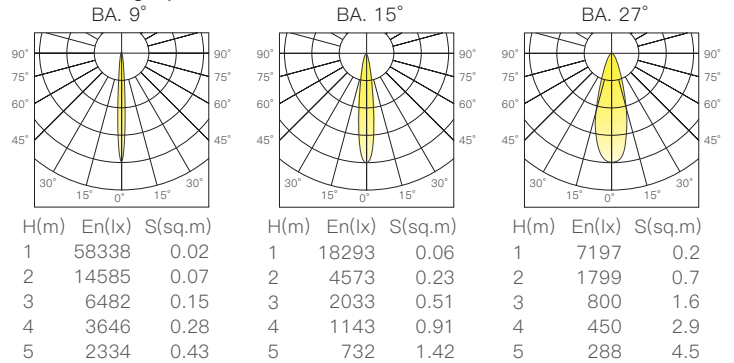
BA.:9°

Filter Angle.:15°/20°/27°/40°/48°/70°/20x60°/wallwash/Honey Comb

CRI:≥97

CCT:4000K

SDCM:≤2

配光曲線圖/Light pattern**光学配件/Front Ring Color**

角度濾片
Angle filter



15°/20°/27°/40°/48°
70°/20x60°/wallwash

色溫濾片
CCT filter



2700K/3000K/3500K

蜂巢網
Honey comb

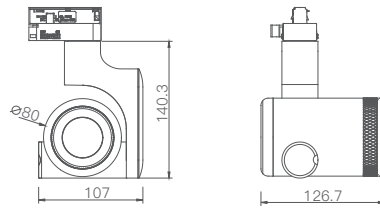


以上測量值以4000K為測試數據
Lumen measured of the data (4000K).



S72-1**FlexRay Series**

- 黑色/Black
- 白色/White

線圖/Dimensions**調光控制系統/Dimming Control****規格/Technical Specifications**

輸入電壓:100-265V 50/60Hz

功率:10W

光通量:660lm

材質:鋁

光束角:12°-68°

顯示指數:≥97

色溫:2700K/3000K/4000K/雙色溫

色容差:≤2

Input Voltage:100-265V 50/60Hz

Power:10W

Luminous Flux:660lm

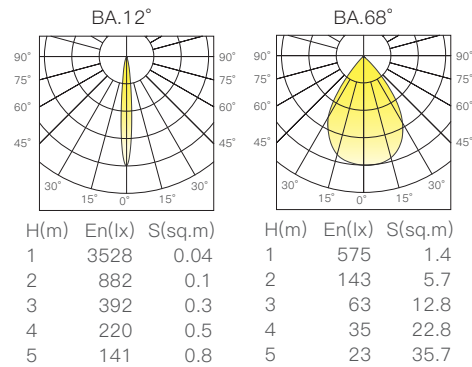
Material:Aluminum

BA.:12°-68°

CRI:≥97

CCT:2700K/3000K/4000K/Tunabl

SDCM:≤2

配光曲線圖/Light pattern

以上測量值以5700K為測試數據
Lumen measured of the data (5700K).

