


S58

Mobi Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

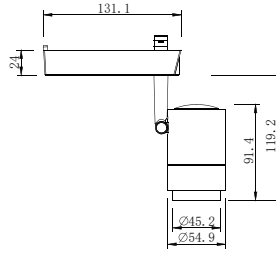

調光控制系統/Dimming Control



Non-dim



0-10V



DALI



Triac



Aco Smart

規格/Technical Specifications

輸入電壓:220-240V 50Hz

LED功率:12W

光通量:700lm

材質:鋁

光束角:17°-45°

顯示指數:≥90

色溫:2700K/3000K/4000K/雙色溫

Input Voltage:220-240V 50Hz

LED Power:12W

Luminous Flux:700lm


Material:Aluminum

BA.:17°-45°

CRI:≥90


CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern

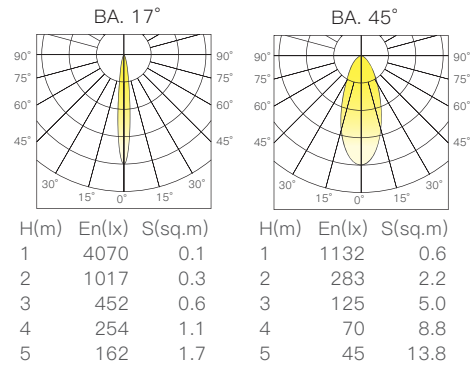

S59**Mobi Series**

- 黑色/Black
- 灰色/Grey
- 白色/White

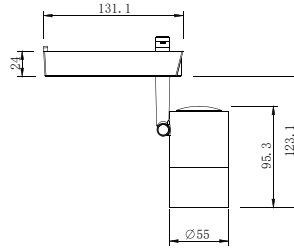線圖/Dimensions**調光控制系統/Dimming Control**

Non-dim



0-10V



DALI



Triac



Aco Smart

規格/Technical Specifications

輸入電壓:220-240V 50Hz

功率:12W

光通量:750lm

材質:鋁

光束角:24°/36°

顯示指數:≥90

色溫:2700K/3000K/4000K/雙色溫

Input Voltage:220-240V 50Hz

Power:12W


Luminous Flux:750lm

Material:Aluminum

BA.:24°/36°

CRI:≥90

CCT:2700K/3000K/4000K/Tunable

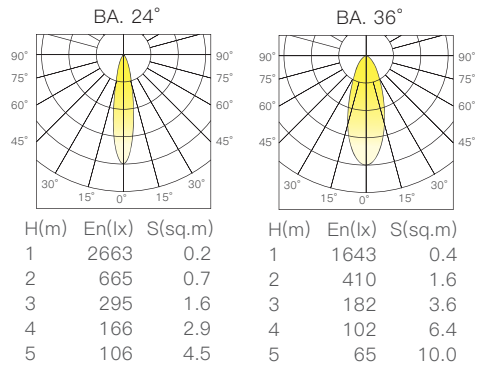配光曲線圖/Light pattern


S60

Mobi Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

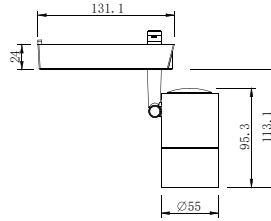

調光控制系統/Dimming Control



Non-dim



0-10V



DALI



Triac



Aco Smart

規格/Technical Specifications

輸入電壓:220-240V 50Hz

功率:12W

光通量:640lm

材質:鋁

光束角:偏光洗牆

顯示指數:≥90

色溫:2700K/3000K/4000K/雙色溫

Input Voltage:220-240V 50Hz

Power:12W

Luminous Flux:640lm


Material:Aluminum

BA.:Asymmetric wallwash

CRI:≥90

CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	885	0.5
2	221	1.8
3	98	4.1
4	55	7.2
5	35	11.3





S61-1

Mobi Series



- 黑色/Black
- 灰色/Grey
- 白色/White

線圖/Dimensions

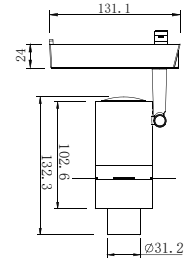

調光控制系統/Dimming Control



規格/Technical Specifications

輸入電壓:220-240V 50Hz

功率:12W

光通量:170lm

材質:鋁

光束角:切光

顯示指數:≥90

色溫:2700K/3000K/4000K

Input Voltage:220-240V 50Hz

Power:12W

Luminous Flux:170lm


Material:Aluminum

BA.:Beam Shaper

CRI:≥90

CCT:2700K/3000K/4000K

配光曲線圖/Light pattern



H(m)	En(lx)	S(sq.m)
1	2118	0.1
2	529	0.3
3	235	0.7
4	132	1.3
5	84	2.0

切光效果/Lighting effect




以上測量值以4000K為測試數據
Lumen measured of the data (4000K).



S61-4**Mobi Series**

- 黑色/Black
- 灰色/Grey
- 白色/White

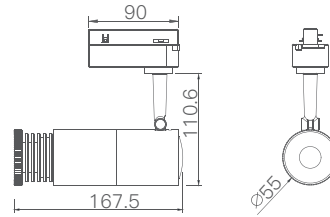線圖/Dimensions**調光控制系統/Dimming Control**

Non-dim



0-10V



DALI



Triac



Aco Smart

規格/Technical Specifications

輸入電壓:100-265V 50/60Hz

功率:12W

光通量:720lm

材質:鋁

光束角:投影燈

顯示指數:≥90

色溫:2700K/3000K/4000K/雙色溫

Input Voltage:100-265V 50/60Hz

Power:12W


Luminous Flux:720lm

Material:Aluminum

BA.:Gobo Light

CRI:≥90

CCT:2700K/3000K/4000K/Tunable

配光曲線圖/Light pattern

H(m)	En(lx)	S(sq.m)
1	2791	0.2
2	697	0.9
3	310	2.0
4	174	3.5
5	111	5.4

Unit
單位: 米 Meter